


## Trainings ▾

## Test


### On-Highway Applications

**Note :** Refer to General Engine Test Procedures (Chassis Dynamometer) (Procedure 014-005 (/qs3/pubsys2/xml/en/procedures/40/40-014-005-tr.html)) before operating the engine to avoid internal component damage.

Operate the engine at 1500 to 1800 rpm in high gear for the first 80 to 160 km [50 to 100 mi] after rebuild.

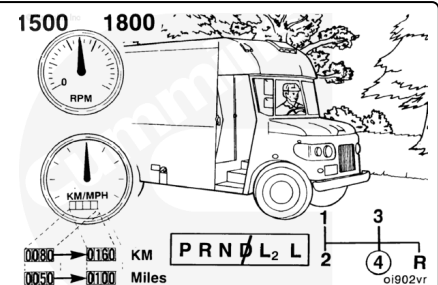


**Note :** Do not idle the engine for more than 5 minutes at any one time during the first 160 km [100 mi] of operation.

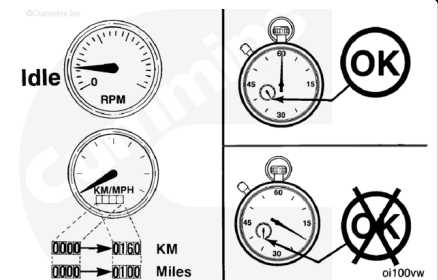


### Off-Highway Applications

**Note :** Refer to General Engine Test Procedures (Chassis Dynamometer) (Procedure 014-005 (/qs3/pubsys2/xml/en/procedures/40/40-014-005-tr.html)) before operating the engine to avoid internal component damage.


Operate the engine as follows during the first 3 hours after rebuild:

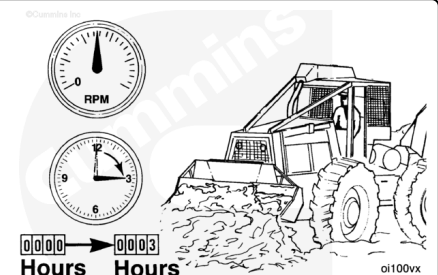

1. Do **not** idle the engine for more than 5 minutes at any one time.
2. Operate the engine at 75-percent throttle while loaded.

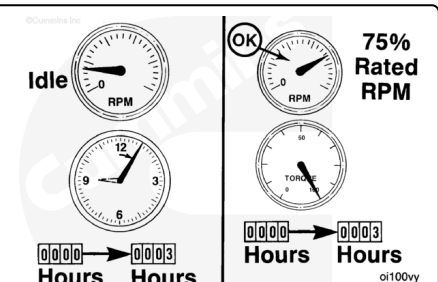

3. Do **not** operate the engine at rated speed (rpm) and full load for more than 5 minutes at any one time.

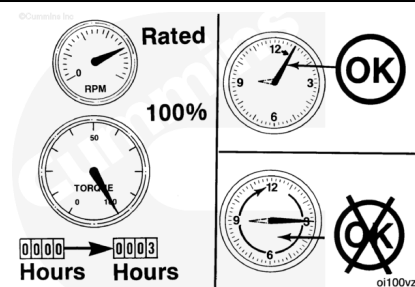

---

Last Modified: 31-Mar-2006

---