

Trainings ▾


Remove

with Mechanically Actuated Injector

Mark the location of the cam follower assemblies as they are removed, so they can be installed in the original location.

Remove the cam follower mounting capscrews.

Pull the cam follower assembly straight out until the assembly is off the ring dowels.

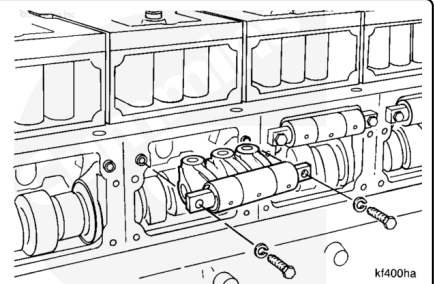

with Electronically Actuated Injector

Mark the location of the cam follower assemblies as they are removed, so they can be installed in the original location.

Remove the two capscrews and washers securing the cam follower assembly.

Pull the cam follower assembly straight out until the assembly is off the ring dowels.

