

Trainings ▾

Install


with Mechanically Actuated Injector

Use Lubriplate™ Number 105 or equivalent, to position and secure edge-molded gaskets to the back of the fuel manifold.

Install the gaskets to align with each cylinder head.

Insert two capscrews per gasket through the manifold located in the rubber-lined holes of the gasket.

An old style gasket is shown, with old style fuel manifold.

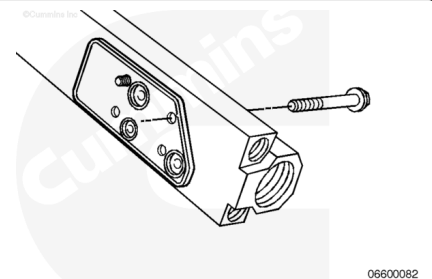


QSK45 Engines

Install the left-bank fuel manifold while making sure the fuel transfer block and tubes are aligned.

Use the sequence illustrated to tighten the 24 capscrews.

Repeat the process for the right-bank manifold.

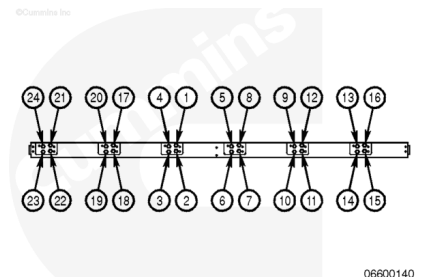

QSK60 Engines

Install the left-bank fuel manifold while making sure the fuel transfer block and tubes are aligned.

Use the sequence illustrated to tighten the 32 capscrews.

Repeat the process for the right-bank manifold.

