


Trainings ▾

Remove

⚠ WARNING ⚠

To reduce the possibility of personal injury, wear the appropriate eye and face protection when removing the straight threaded o-ring plug holding in the oil pressure regulator. The spring is under pressure and can cause personal injury.

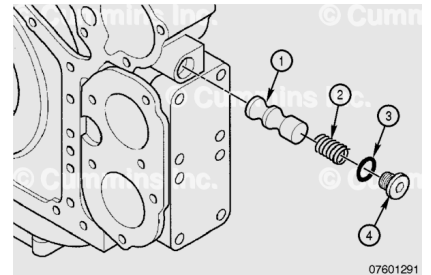

Carefully remove the straight-thread o-ring plug (4).

Remove the spring (2) and spool (1).

Remove the o-ring (3) from the straight thread o-ring plug.