


Trainings ▾

Preparatory Steps

⚠ WARNING ⚠

Coolant is toxic. Keep away from children and pets. If not reused, dispose of in accordance with local environmental regulations.

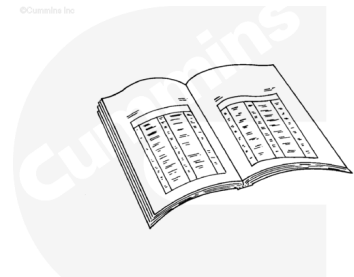

ck800wa

⚠ WARNING ⚠


Do not remove the pressure cap from a hot engine. Wait until the coolant temperature is below 50°C [120°F] before removing the pressure cap. Heated coolant spray or steam can cause personal injury.

- Drain the cooling system. Refer to Procedure 008-018 (</qs3/pubsys2/xml/en/procedures/89/89-008-018.html>).
- Remove the upper radiator hose. Refer to Procedure 008-045 (</qs3/pubsys2/xml/en/procedures/89/89-008-045.html>).
- Remove the thermostat housing. Refer to Procedure 008-013 (</qs3/pubsys2/xml/en/procedures/89/89-008-013.html>).
- Remove the thermostats. Refer to Procedure 008-013 (</qs3/pubsys2/xml/en/procedures/89/89-008-013.html>).

Remove

⚠ CAUTION ⚠

Do not damage the thermostat housing when removing the thermostat seals or damage to the seals can occur.

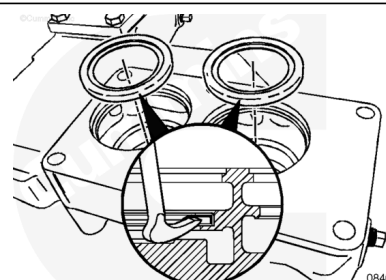

08400347

The thermostat housing has a machined counterbore to locate the seals.


Use a rolling head pry bar. Position the pry bar tip under the top flange of the seal and pry upward. Remove the seals from the housing.

Use a Snap-On® pry bar, Part Number 1650, or equivalent.
Remove the engine thermostat seals.

Install

The seal **must** be installed with the part number positioned upward.

Use a mallet and a mandrel, or a socket with a diameter the same as the diameter of the seal case. Install the seals. Be sure the seals seat in the bottom of the counterbore.

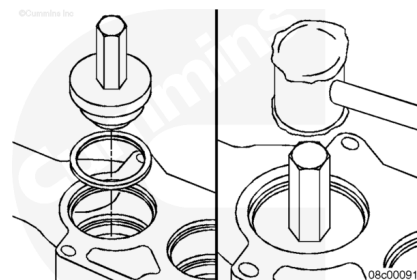

Finishing Steps

- Install the thermostats. Refer to Procedure 008-013 (</qs3/pubsys2/xml/en/procedures/89/89-008-013.html>).
- Install the thermostat housing. Refer to Procedure 008-013 (</qs3/pubsys2/xml/en/procedures/89/89-008-013.html>).
- Install the upper radiator hose. Refer to Procedure 008-045 (</qs3/pubsys2/xml/en/procedures/89/89-008-045.html>).
- Fill the cooling system. Refer to Procedure 008-018 (</qs3/pubsys2/xml/en/procedures/89/89-008-018.html>).

