

Trainings ▾

Cylinder Head


Tool Number

4918319

Protective Plug Kit

Used to plug oil passages and drillings during a repair process.

©Cummins Inc

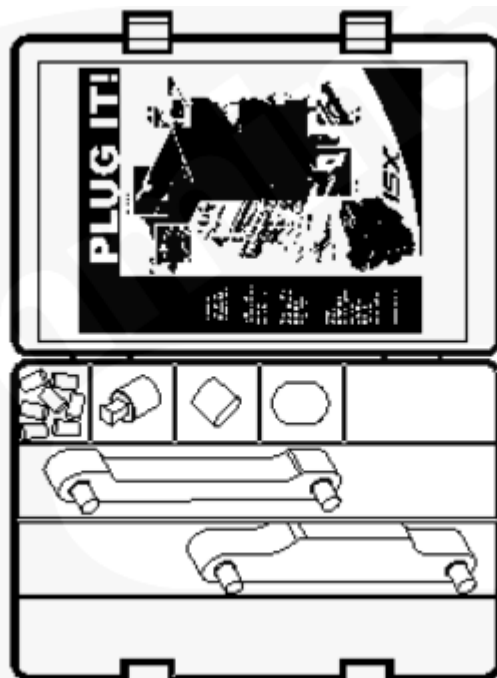


22c00256

Tool Number

4919358

Four-Valve Spring Compressor

Used to remove or install valve spring retainers, valve springs, and valve seals.

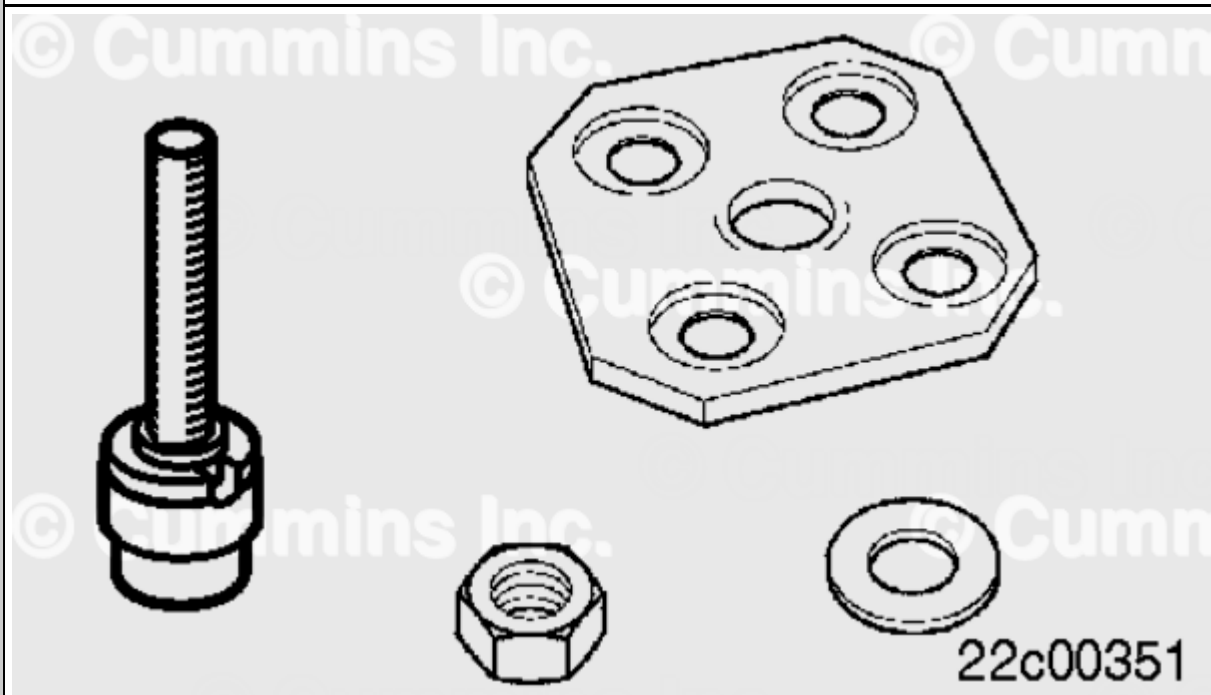


Tool Number

3163162

Head Bolt Stretch Gauge

Used to measure head bolts.

© Cummins Inc.

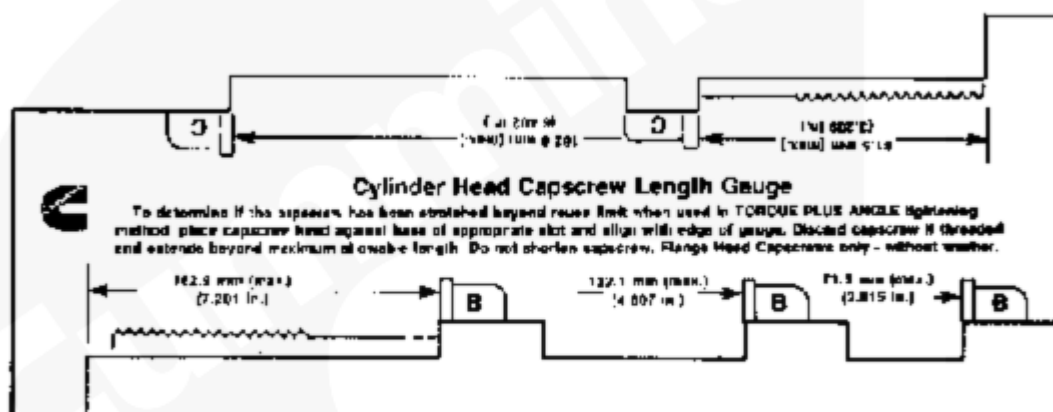

3163162


Tool Number

3823621

Hydraulic Camshaft Bushing Installation and Removal Tool

Used to remove and install camshaft bushings.

©Cummins Inc

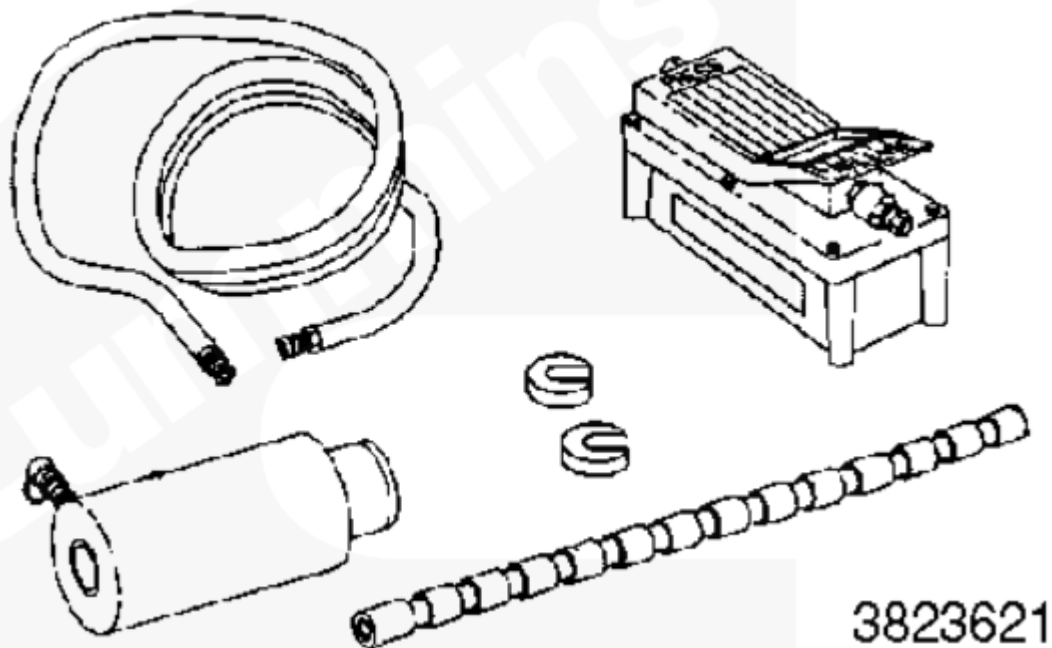


Tool Number

3164088

Valve Camshaft Bushing Installation and Removal Tool

Used with the hydraulic camshaft bushing installation and removal tool, Part Number 3823621.

©Cummins Inc

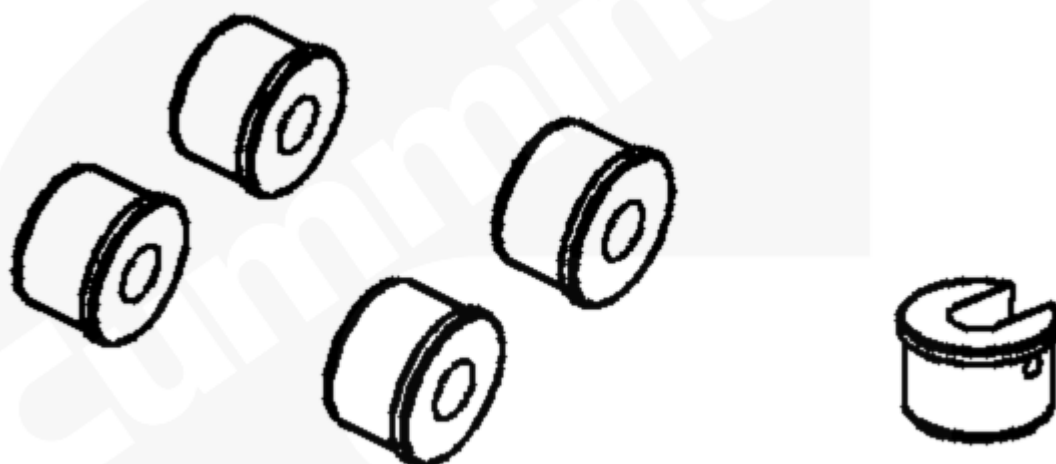

3164088


Tool Number

3164089

Injector Camshaft Bushing Installation and Removal Tool

Used with the hydraulic camshaft bushing installation and removal tool, Part Number 3823621.

©Cummins Inc

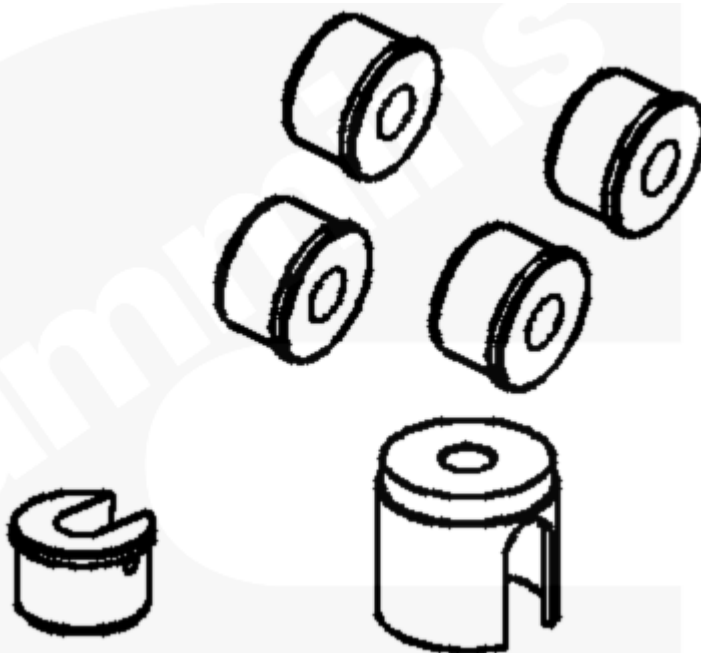

3164089


Tool Number

3400329

Cylinder Head Lifting Fixture

Used to remove the cylinder head from the cylinder block.

©Cummins Inc

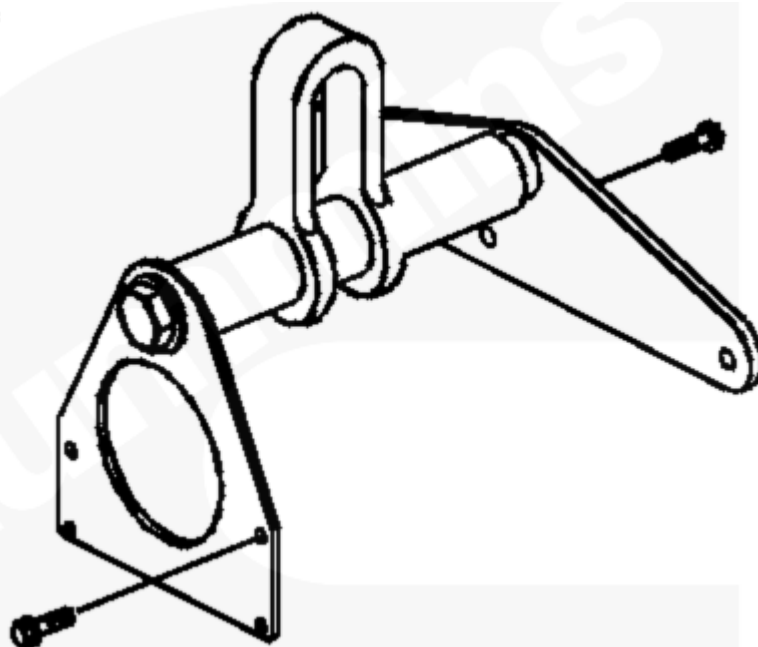

3162996


Tool Number

3823258

Scotch-Brite™ 7448

Used to clean carbon, rust, and corrosion from the engine block and parts.

©Cummins Inc

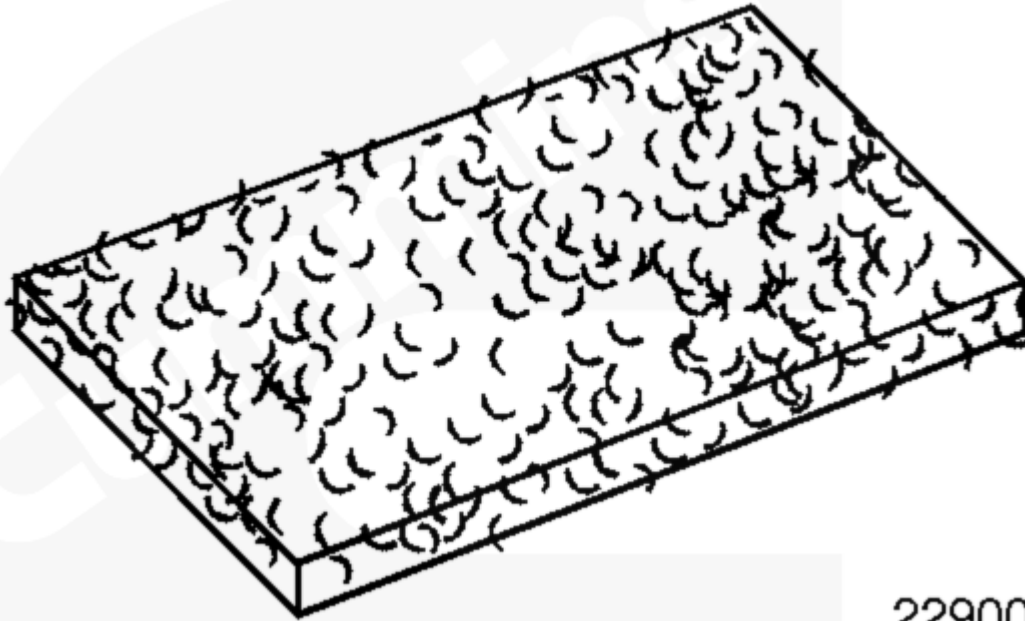

22900039


Tool Number

3163059

Air Impact Wrench

A tool which produces the amount of torque required to rotate Signature™ 600 capscrews. It has a square drive size of 3/4-inch, an output of 75 to 900 ft-lbs, and a continuous working torque of 500 ft-lb when using a 3/8-inch unrestricted hose and a 90 psi pressure source.

©Cummins Inc

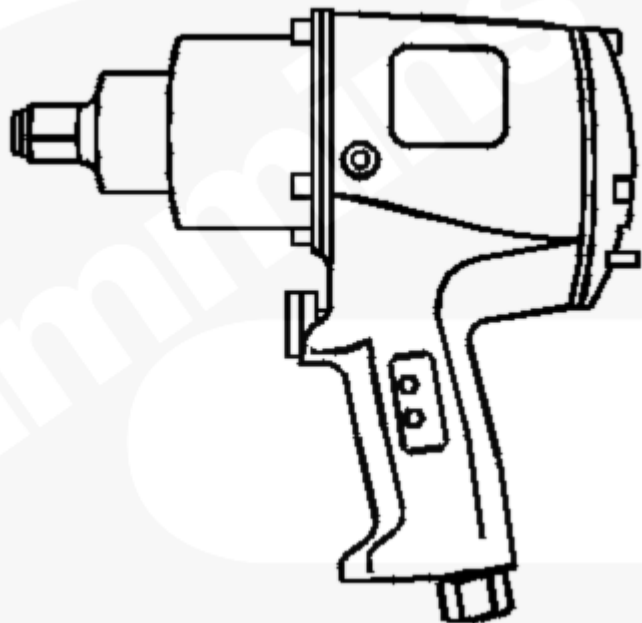

3163059


Tool Number

3163484

24-mm Impact Socket

Used to tighten both the cylinder head bolts and the main bearing cap bolts. The socket has sufficient length for Signature™ 600 and is laser marked at 90-degree increments.

©Cummins Inc

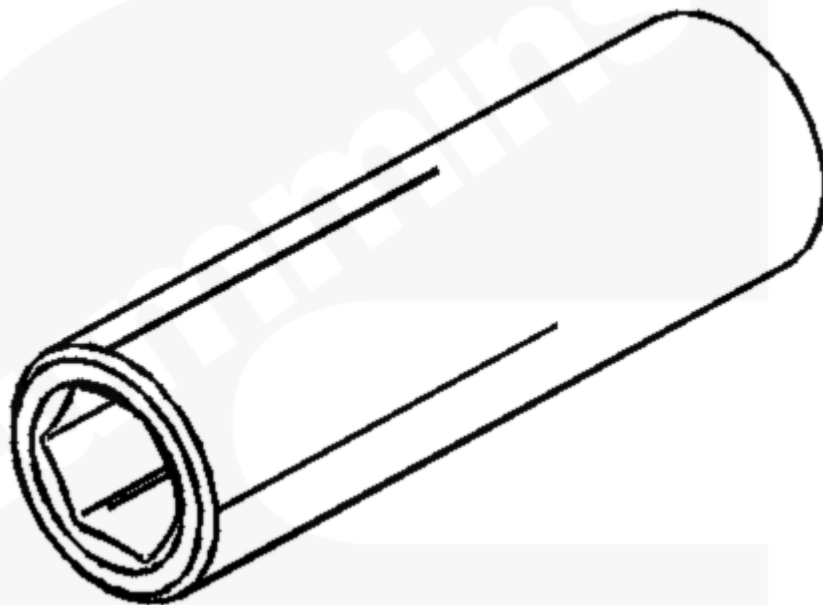

3163484


Tool Number

3164438

Depth Gauge Assembly

Used to measure liner protrusion, injector protrusion, cylinder block counterbore depths, and valve intrusion and/or protrusion.

©Gummine Inc

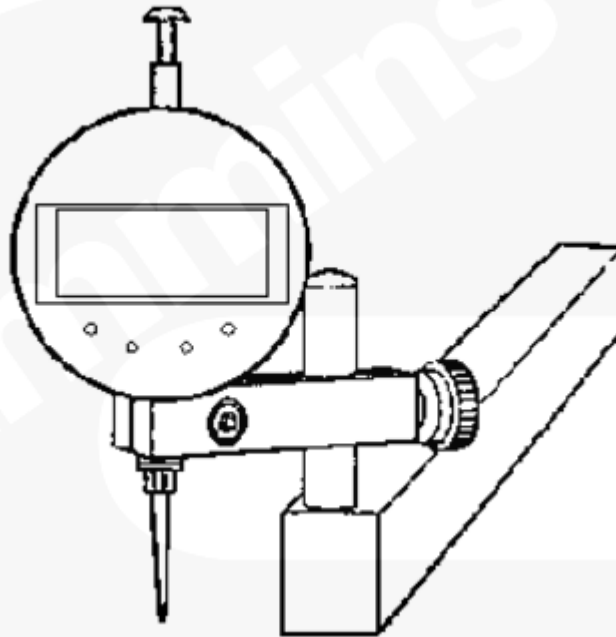

3164438

Tool Number

5296545

Valve Seal Installation Tool

Used to push the valve guide seals onto the valve and valve guide when assembled in the head.

©Cummins Inc



02o00005


Tool Number

3163294

Valve Seal Installation Tool

Used to push the valve guide seals onto the valve and valve guide when assembled in the head.

©Cummins Inc

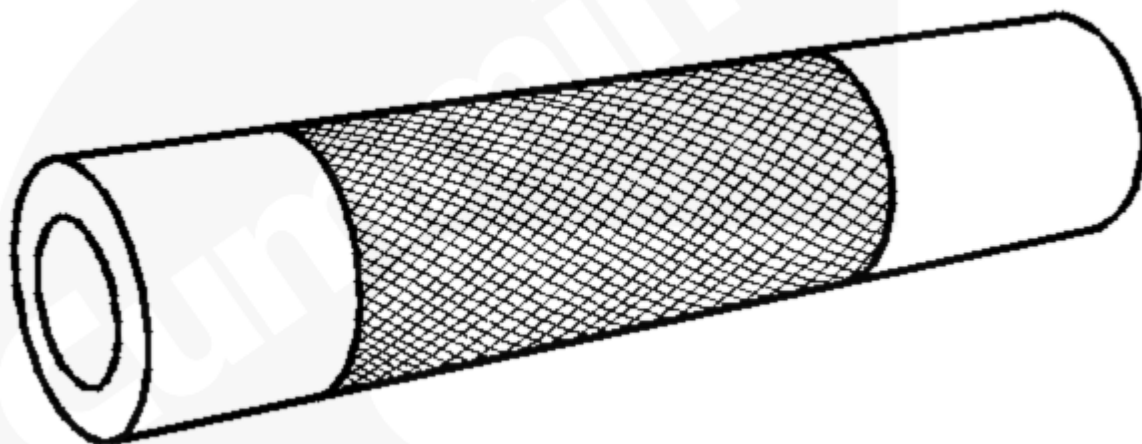

3163293


Tool Number

3163293

Valve Seal Puller

Used to remove the valve seal.

©Cummins Inc

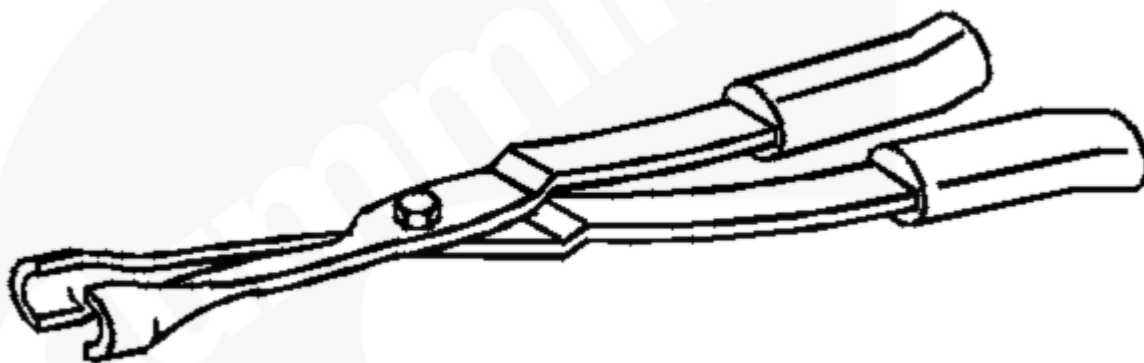

3163294


Tool Number

3162892

Valve Guide Installer

Used to press the valve guides into the cylinder head to the proper assembled height.

©Cummins Inc

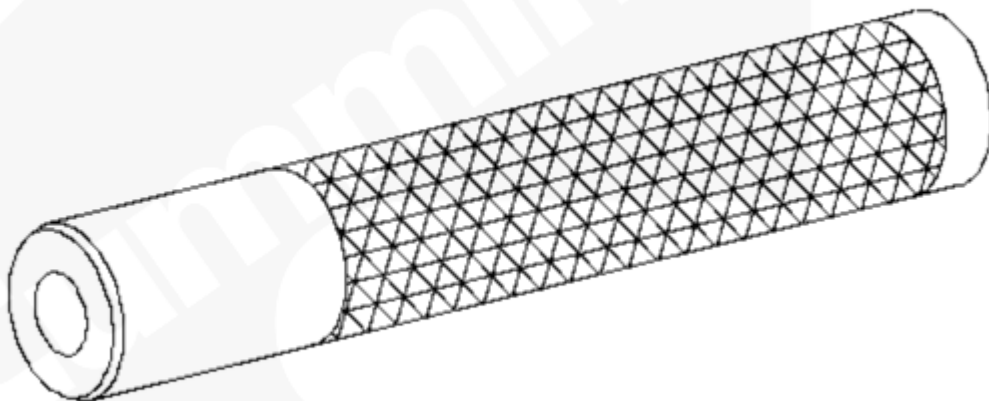

3162892


Tool Number

3163318

Intake Seat Installer

Used to install the intake valve seat into the cylinder head.

©Cummins Inc

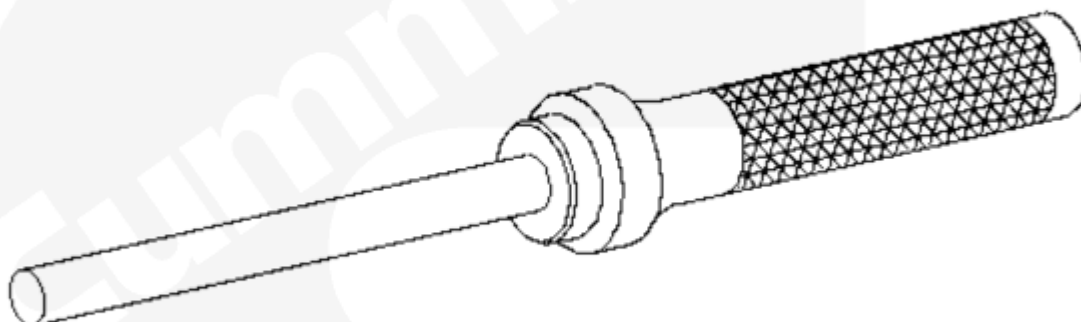

3163318


Tool Number

3163319

Exhaust Seat Installer

Used to install the exhaust valve seat into the cylinder head.

©Cummins Inc

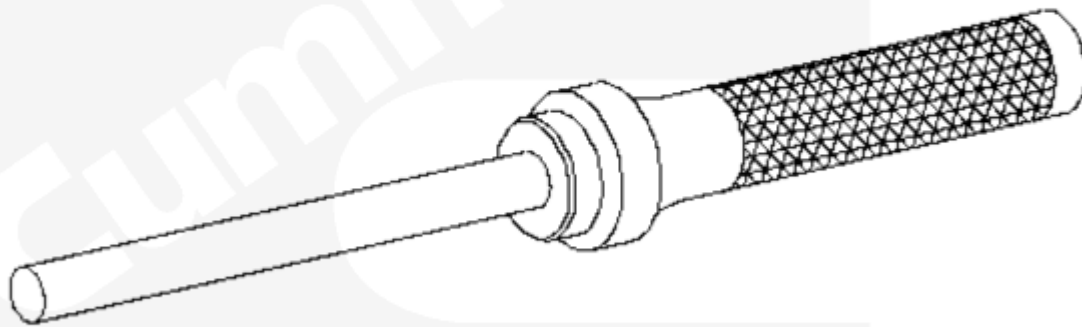**3163319**


Tool Number

ST1276-1

Exhaust Seat Puller

Used to remove the exhaust valve seat from the cylinder head.

©Cummins Inc

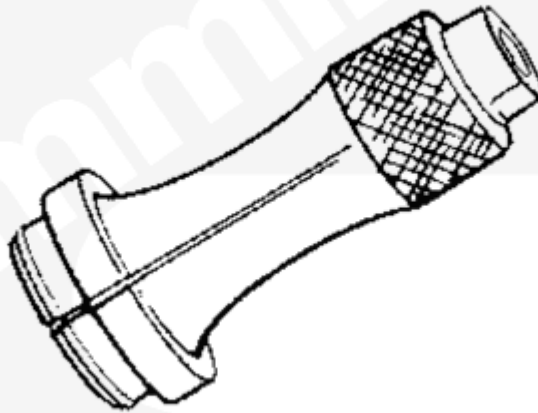

ST1276-1


Tool Number

ST1279-1

Intake Seat Puller

Used to remove the intake valve seat from the cylinder head.

©Cummins Inc

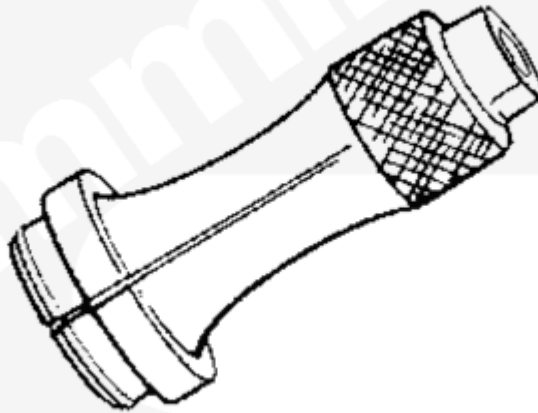

ST1279-1


Tool Number

3163321

Valve Guide Removal Tool

Used to remove the valve guides from the cylinder head.

©Cummins Inc

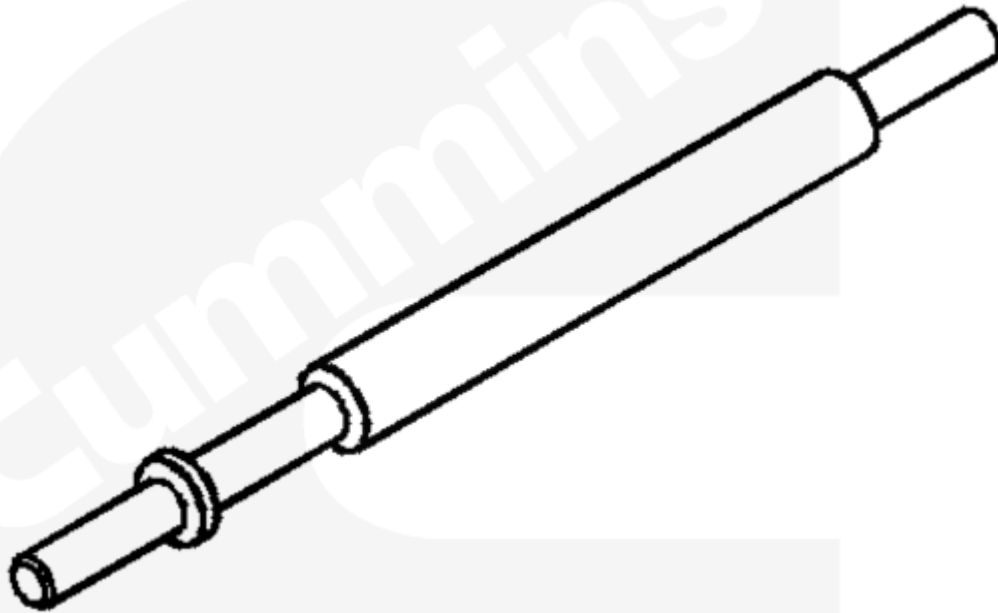

3163321


Tool Number

3824277 (110V) / 3824278 (220V)

Valve Vacuum Tester

Used to determine if the valves are correctly seated in the cylinder head. The seal ring, Part Number ST-1257-35, and vacuum cup, Part Number ST1257-6, are purchased separately.

©Cummins Inc

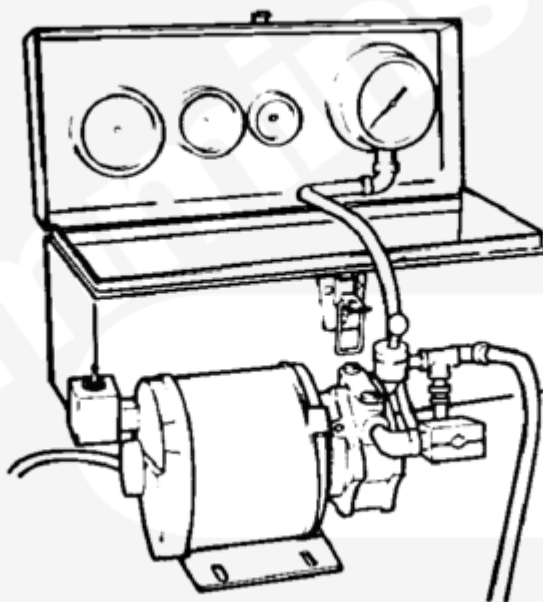

kn8togr


Tool Number

3376617

Slide Hammer Assembly

Used with the valve seat puller to remove the valve seat insert from the cylinder head.

©Cummins Inc

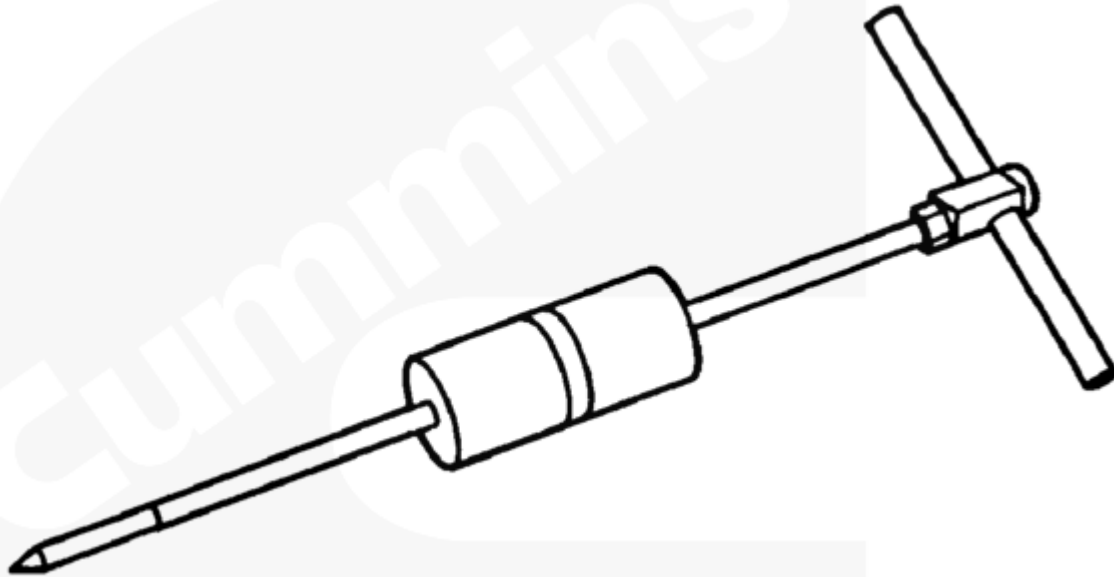

bp8togd


Tool Number

ST1166-1

Magnetic Crack Detector

Used to inspect cylinder heads and other ferrous castings that can not be magnafluxed for crack detection.

©Gummine Inc

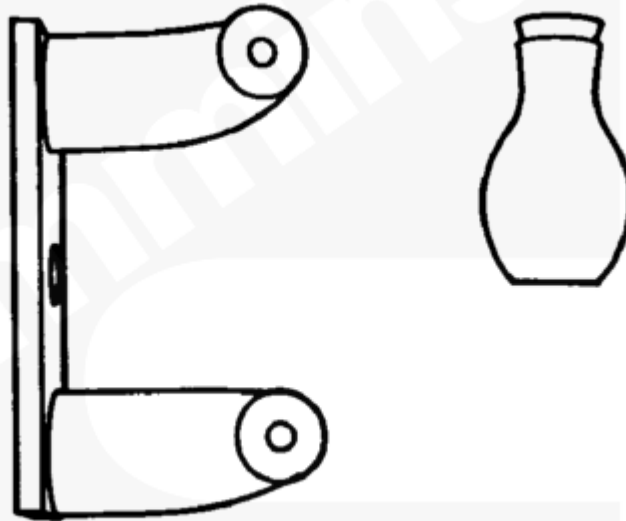

kn8togo


Tool Number

3376405

Valve Seat Grooving Tool

Used to cut a groove circumferentially in the inside diameter of a valve seat to allow the seat extractor a suitable grip area.

©Cummins Inc

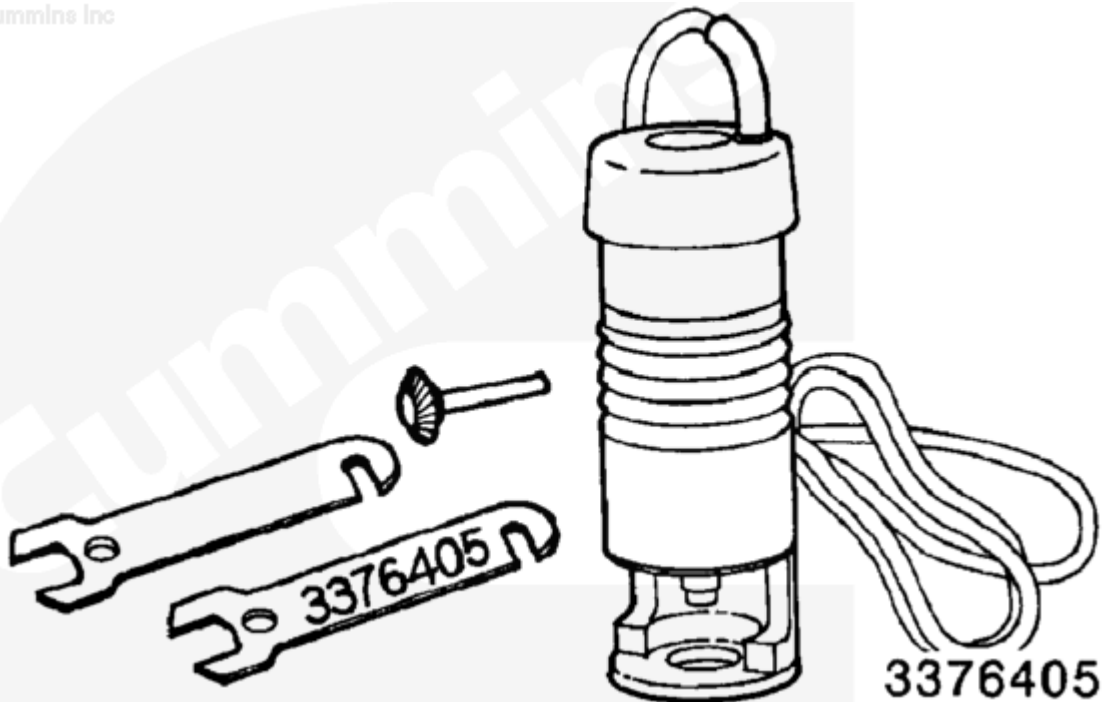


Tool Number

3164943

Cylinder Head Fuel Passage Leak Test Kit

Used to test the fuel passages in the cylinder head. Use with Leak Test Kit, Part Number 3164231, purchased separately.

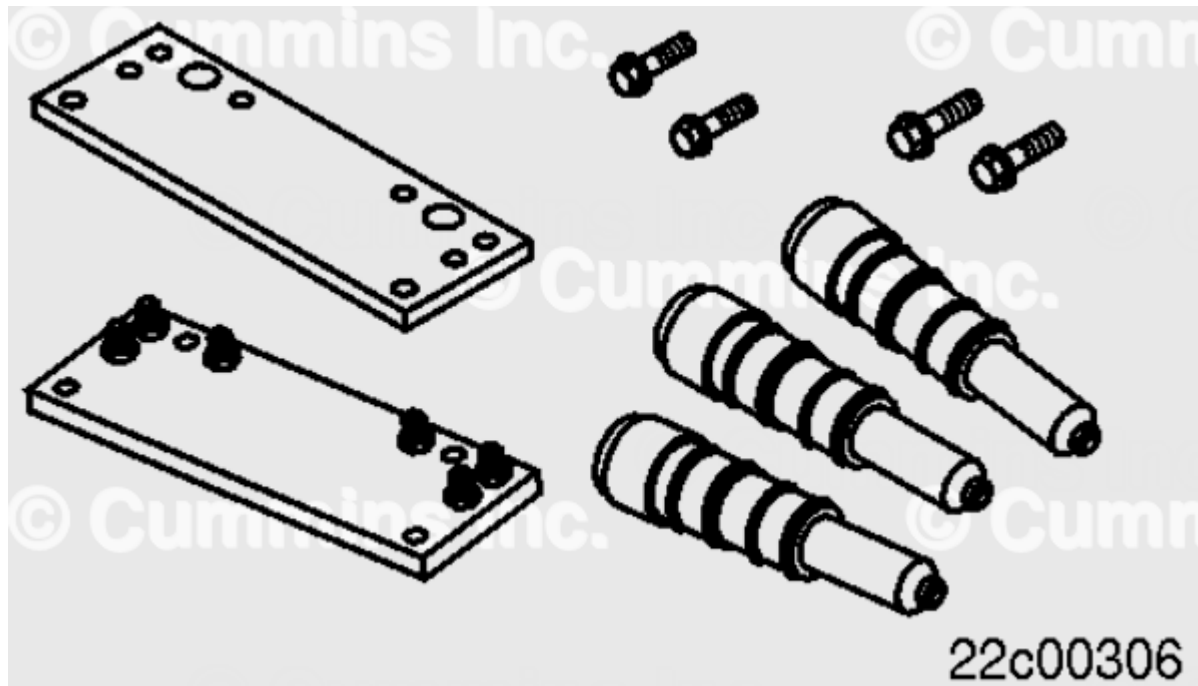


Tool Number

5299837

Valve Camshaft Installation and Removal Kit

Use to install valve camshaft into the cylinder head. The kit includes a sleeve, Part Number 5299841, that fits over the camshaft gear nose to allow installation from the rear of the cylinder head.

©Cummins Inc

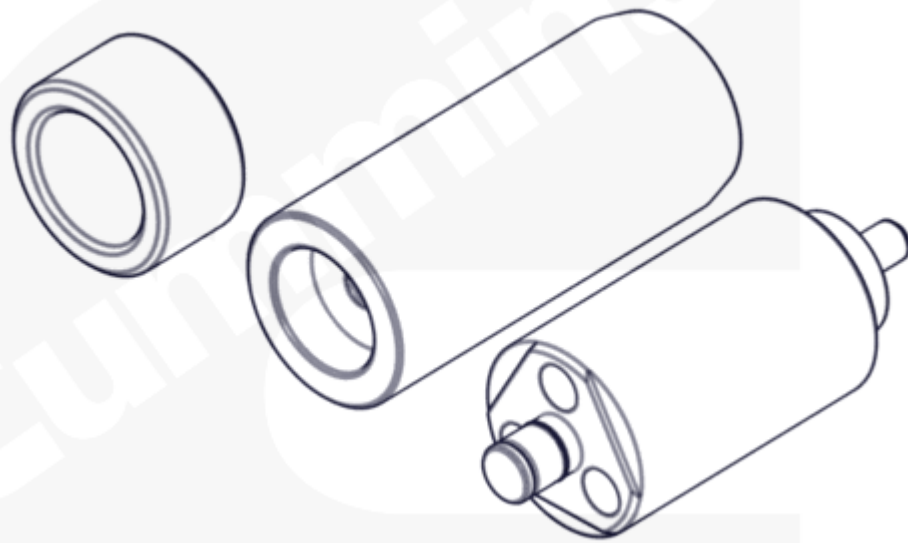


01t00030

Tool Number

5395348

Camshaft Removal and Installation Kit

Used to remove the camshaft from the cylinder head.

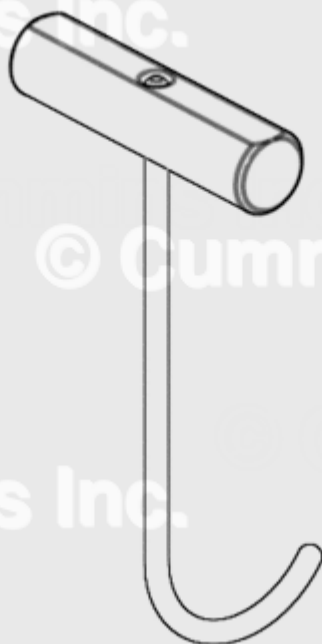

22a00294