

Trainings ▾

General Information

CAUTION

It is critical to have the poppet end of the differential check valve installed toward the wet tank or toward the air dryer outlet or air dryer failure can occur.

The Holset® E-Type system air compressor is an engine drive, piston type compressor which supplies compressed air to operate air activated devices. The compressor operates continuously, but has a loaded and unloading operating mode. The operating mode is controlled by a pressure activated governor and the compressor unloading assembly.

Intake air can come from the intake manifold or near the engine air cleaner.

For E-Type unloader system used with an air dryer, an Econ valve, and check valve with makeup line **must** be installed in the air system, or an approved dryer incorporating all valves **must** be used.


The Econ valve **must** be mounted in a position and altitude to avoid collecting condensation which can freeze during cold weather. The Econ valve **must** be installed with its inlet port above the outlet port to avoid condensation traps in the discharge line or fittings, per normal recommended installation practice for air compressor discharge lines.

The air inlet temperature for the Econ valve **must not** exceed the inlet air maximum temperature recommendation of the air dryer manufacturer. When possible, the Econ valve **must** be 610 to 2134 mm [2 to 7 ft] from the air compressor or the air dryer **must** be 2438 to 3048 mm [8 to 10 ft] from the air compressor. The air discharge line **must** be downward sloping from the air compressor outlet air port to the air dryer inlet air port.

The Holset® differential check valve **must** be installed either on the upper part of the wet tank, or on the side of the dryer outlet fittings to avoid condensed moisture (see illustrations that follow).

Note : Use of a differential check valve other than the Holset® identified part, can result in system malfunction. Contact the air dryer manufacturer for recommendation.

Holset Air Compressor Pump-Up Time From 85 PSI to 100 PSI (5.78-6.80 BARS) vs. Reservoir Size

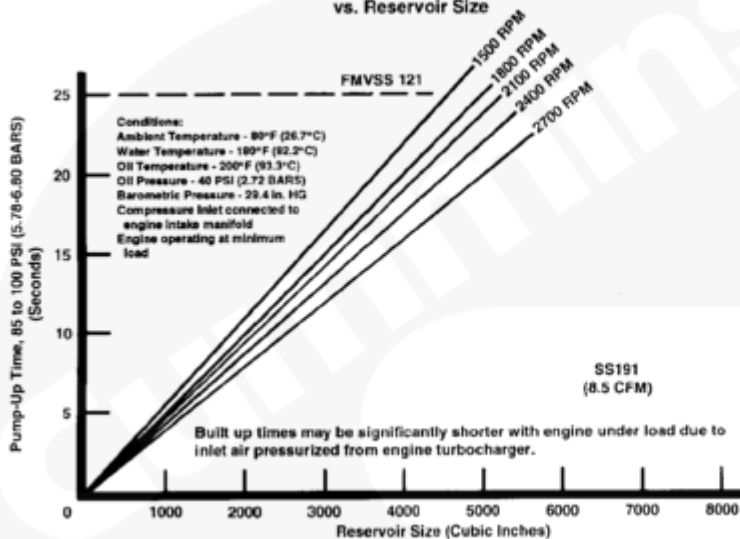


Specifications

Rated Displacement	8.5 CFM (191 cc.)
Bore	3.15" (80.0)
Stroke	1.5" (38.1)
Cylinders	1
Valving	Disc
Operating rpm	3000 (max.)
Cooling	air/water
Lubrication	Pressurized engine oil
Turbocharged	
Inlet pressure (max. acceptable)	25 PSIG (1.7 BARS)
Line Sizes	
water in	1/2" OD (12.7)
water out	1/2" OD (12.7)
air in*	5/8" ID min (15.9)
air out**	1/2" ID min (12.7)
Package envelope	
Height*	7.96" (202.2)
Width	4.91" (124.7)
Length	7.32" (185.6)
Weight	30 lbs. (13.6 kg)
Max. Pressure	135 PSIG (9.18 BARS)
	Max. System Pressure

(mm)
* 1" inlet air lines are recommended for all applications.
** 5/8" air out (exhaust) line is recommended for single cylinder models and a 1" exhaust line is recommended for twin cylinder models.

SS296

Holset Air Compressor Pump-Up Time From 85 PSI to 100 PSI (5.78-6.80 BARS) vs. Reservoir Size

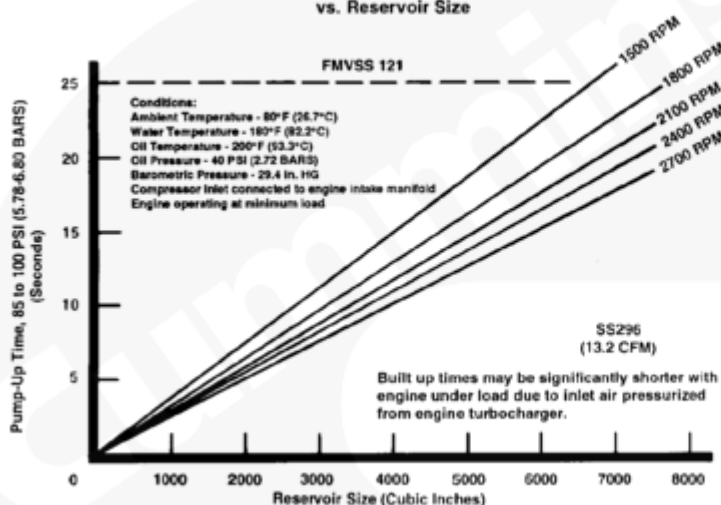


Specifications

Rated Displacement	13.2 CFM (296 cc.)
Bore	3.625" (92.1)
Stroke	1.75" (44.5)
Cylinders	1
Valving	Disc
Operating rpm	3000 (max.)
Cooling	water
Lubrication	Pressurized engine oil
Turbocharged	
Inlet pressure (max. acceptable)	30 PSIG (max.) (2.04 BARS)
Line Sizes	
water in	1/2" OD (12.7)
water out	1/2" OD (12.7)
air in*	7/8" ID min (22.2)
air out**	1/2" ID min (12.7)
Package envelope	
Height*	9.15" (232.4)
Width	5.75" (146.1)
Length	9.00" (228.6)
Weight	35 lbs. (15.9 kg)
Max. Pressure	135 PSIG (9.18 BARS)
	Max. System Pressure

(mm)
* 1" inlet air lines are recommended for all applications.
** 5/8" air out (exhaust) line is recommended for single cylinder models and a 1" exhaust line is recommended for twin cylinder models.

Holset® SS296, SS296E, and SS338E A/C Model

Holset Air Compressor Pump-Up Time From 85 PSI to 100 PSI (5.78-6.80 BARS) vs. Reservoir Size

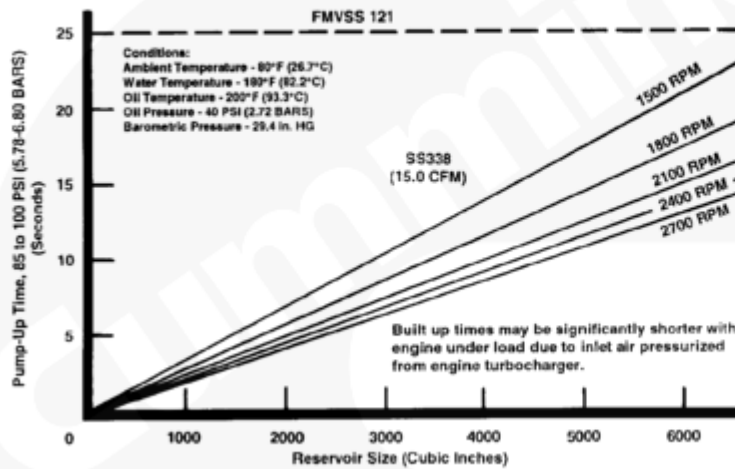

Specifications


Rated Displacement	15.0 CFM (338 cc.)
Bore	3.875" (98.4)
Stroke	1.75" (44.5)
Cylinders	1
Valving	Disc
Operating rpm	3000 (max.)
Cooling	water
Lubrication	Pressurized engine oil
Turbocharged	
Inlet pressure (max. acceptable)	30 PSIG (max.) (2.04 BARS)
Line Sizes	
water in	1/2" OD (12.7)
water out	1/2" OD (12.7)
air in*	7/8" ID min (22.2)
air out**	1/2" ID min (12.7)
* 1" inlet air lines are recommended for all applications.	
** 5/8" air out (exhaust) line is recommended for single cylinder models and a 1" exhaust line is recommended for twin cylinder models.	
Package envelope	
Height*	9.31" (236.6)
Width	5.25" (133.4)
Length	12.12" (307.6)
Weight	48 lbs. (21.8 kg)
Max. Pressure	135 PSIG (9.18 BARS)
	Max. System Pressure

(mm)

* Measured from centerline of crankshaft drive location. o800v71

Holset® ST676 A/C Model

Holset Air Compressor Pump-Up Time From 85 PSI to 100 PSI (5.78-6.80 BARS) vs. Reservoir Size

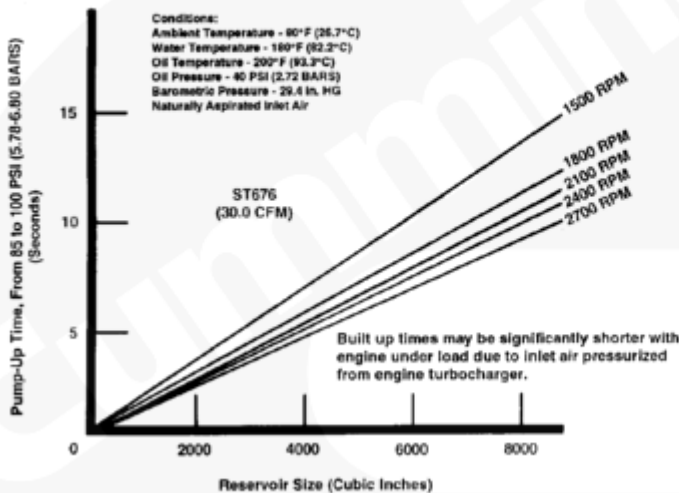

Specifications


Rated Displacement	30.0 CFM (676 cc.)
Bore	3.625" (92.1)
Stroke	2.00" (50.8)
Cylinders	2
Valving	Disc
Operating rpm	3000 (max.)
Cooling	water
Lubrication	Pressurized engine oil
Turbocharged	
Inlet pressure (max. acceptable)	35 PSIG (2.04 BARS)
Line Sizes	
water in	1/2" OD (12.7)
water out	1/2" OD (12.7)
air in*	7/8" ID min (22.2)
air out**	5/8" ID min (15.9)
* 1" inlet air lines are recommended for all applications.	
** 5/8" air out (exhaust) line is recommended for single cylinder models and a 1" exhaust line is recommended for twin cylinder models.	
Package envelope	
Height*	13.5" (342.9)
Width	7.00" (177.8)
Length	11.25" (285.8)
Weight	75 lbs. (34.0 kg)
Max. Pressure	135 PSIG (9.18 BARS)
	Max. System Pressure

(mm)

* Measured from centerline of crankshaft drive location. o800v72

Holset® ST773 A/C Model

Holset Air Compressor Pump-Up Time From 85 PSI to 100 PSI (5.78-6.80 BARS) vs. Reservoir Size

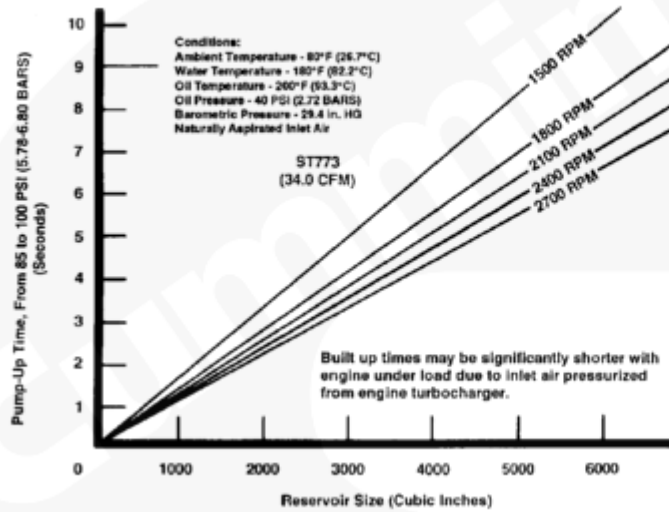


Rated Displacement	34.0 CFM (773 cc.)
Bore	3.875" (98.4)
Stroke	2.00" (50.8)
Cylinders	2
Valving	Disc
Operating rpm	3000 (max.)
Cooling	water
Lubrication	Pressurized engine oil
Turbocharged	
inlet pressure (max. acceptable)	35 PSIG (2.04 BARS)
Line Sizes	
water in	1/2" OD (12.7)
water out	1/2" OD (12.7)
air in*	7/8" ID min (22.2)
air out**	5/8" ID min (15.9)
* 1" inlet air lines are recommended for all applications.	
** 5/8" air out (exhaust) line is recommended for single cylinder models and a 1" exhaust line is recommended for twin cylinder models.	
Package envelope	
Height*	9.19" (233.4)
Width**	10.90" (275.9)
Length	11.30" (287.0)
Weight	80 lbs. (36.3 kg)
Max. Pressure	135 PSIG (9.18 BARS)
	Max. System Pressure

(mm)
 * Measured from centerline of crankshaft drive location
 ** Tilted width, 3.1" (78.74 mm) inside crankshaft centerline and 7.8" (198.12 mm) outside centerline.

o800v73

Holset® QE230 A/C Model

Holset Air Compressor Pump-Up Time From 85 PSI to 100 PSI (5.78-6.80 BARS) vs. Reservoir Size

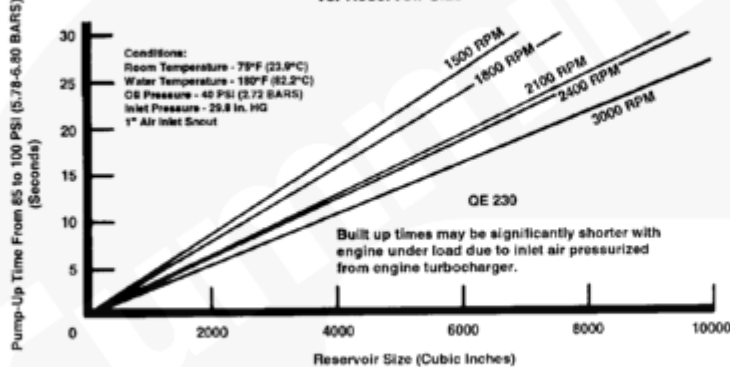

Specifications


Rated Displacement	10.3 CFM (230 cc.)
Bore	3.625" (92.1)
Stroke	1.75" (44.5)
Cylinders	1
Valving	Disc
Operating rpm	3000 (max.)
Cooling	water
Lubrication	Pressurized engine oil
Turbocharged	
inlet pressure (max. acceptable)	30 PSIG (max.) (2.04 BARS)
Line Sizes	
water in	1/2" OD (12.7)
water out	1/2" OD (12.7)
air in*	7/8" ID min (22.2)
air out**	5/8" ID min (15.9)
* 1" inlet air lines are recommended for all applications.	
** 5/8" air out (exhaust) line is recommended for single cylinder models and a 1" exhaust line is recommended for twin cylinder models.	
Package envelope	
Height*	8.83" (212.9)
Width**	6.54" (166.1)
Length	10.7" (271.8)
Weight	37 lbs. (16.8 kg)
Max. Pressure	135 PSIG (9.18 BARS)
	Max. System Pressure

(mm)
 * Measured from centerline of crankshaft drive location.
 ** Tilted width, 3.1" (78.74 mm) inside crankshaft centerline and 7.8" (198.12 mm) outside centerline.

o800v74

Holset® QE230, QE296, and QE338 A/C Model

Holset Air Compressor Pump-Up Time From 85 PSI to 100 PSI (5.78-6.80 BARS) vs. Reservoir Size

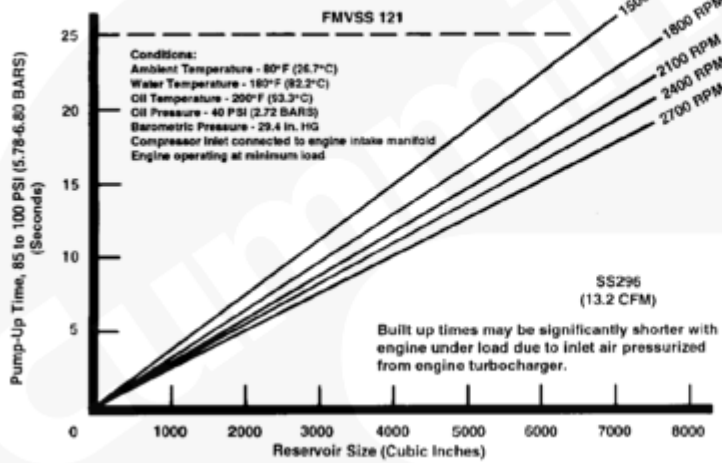

Specifications


Rated Displacement	13.2 CFM (296 cc.)
Bore	3.625" (92.1)
Stroke	1.75" (44.5)
Cylinders	1
Valving	Disc
Operating rpm	3000 (max.)
Cooling	water
Lubrication	Pressurized engine oil
Turbocharged	
Inlet pressure (max. acceptable)	30 PSIG (max.) (2.04 BARS)
Line Sizes	
water in	1/2" OD (12.7)
water out	1/2" OD (12.7)
air in*	7/8" ID min (22.2)
air out**	1/2" ID min (12.7)
* 1" inlet air lines are recommended for all applications.	
** 5/8" air out (exhaust) line is recommended for single cylinder models and a 1" exhaust line is recommended for twin cylinder models.	
Package envelope	
Height*	9.15" (232.4)
Width	5.75" (146.1)
Length	9.00" (228.6)
Weight	35 lbs. (15.9 kg)
Max. Pressure	135 PSIG (9.18 BARS)
Max. System Pressure	

(mm)

* Measured from centerline of crankshaft drive location. o800v70

The following illustration applies to the Holset® QE338 air compressor:

Holset Air Compressor Pump-Up Time From 85 PSI to 100 PSI (5.78-6.80 BARS) vs. Reservoir Size

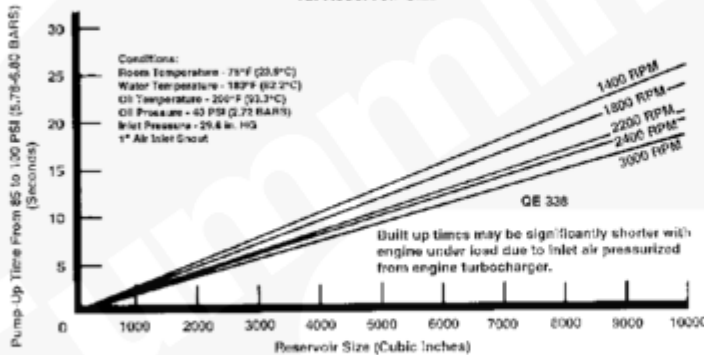

Specifications

Rated Displacement	15.6 CFM (338 cc.)
Bore	3.875" (98.4)
Stroke	1.75" (44.5)
Cylinders	1
Valving	Disc
Operating rpm	3000 (max.)
Cooling	water
Lubrication	Pressurized engine oil
Turbocharged	
Inlet pressure (max. acceptable)	30 PSIG (max.) (2.04 BARS)
Line Sizes	
water in	1/2" OD (12.7)
water out	1/2" OD (12.7)
air in*	7/8" ID min (22.2)
air out**	5/8" ID min (15.9)
* 1" inlet air lines are recommended for all applications.	
** 5/8" air out (exhaust) line is recommended for single cylinder models and a 1" exhaust line is recommended for twin cylinder models.	
Package envelope	
Height*	8.51" (216.7)
Width**	7.35" (186.7)
Length	10.7 (271.8)
Weight	26 lbs. (11.8 kg)
Max. Pressure	135 PSIG (9.18 BARS)
Max. System Pressure	

(mm)

* Measured from centerline of crankshaft drive location.

** **Total width, 3.1" (79.14 mm) inside crankshaft centerline and 7.8" (198.12 mm) outside centerline.

o800v76