

Trainings ▾

Select Service Tools


Recommended Cummins® Service Tools

- Cummins® ECM bench calibration harness, Part Number 3163151.
- No additional service items required.

General Information

Engine Control Module (ECM) ROM Boot Procedure:

- Install the calibration cable with ROM boot switch.
- With the keyswitch (2) in the OFF position, press the ROM boot switch (1), located on the ECM-specific calibration adapter harness, and hold.
- Switch the keyswitch to the ON position while holding the ROM boot switch down, wait for five seconds.
- Release the ROM boot switch.
- Recalibrate the ECM. Refer to Procedure 019-032 in Section 19. (</qs3/pubsys2/xml/en/procedures/105/105-019-032.html>)
- Remove the ROM boot cable from the ECM.

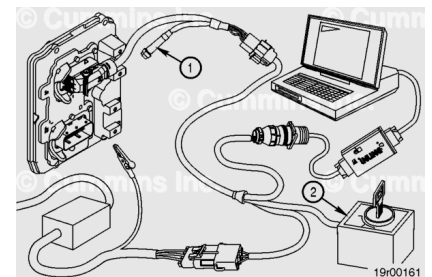

For general tool information, including the correct installation configuration, see the ECM-specific calibration adapter cable with ROM boot switch in the ECM Bench Calibration Base Harness, Service Tool Instruction 3377791.

