


## Trainings ▾

### Remove Engine Stop Button

#### **⚠ WARNING ⚠**

**To reduce the possibility of injury and equipment damage, shipboard tag out and lock out procedures must be followed.**



Make a note of the connection points of all wires.


Loosen the wire set screws and remove the wires.

Loosen the bottom button set screw.

Lift the upper lever.

Pull rear switch assembly off of the button.

Remove button from the front of the panel door.




### Terminal Strip

Note the location of the affected wire.

Insert a small flat tip screwdriver into the square slot above wire to be removed from terminal strip.


Move the screwdriver handle in an upward motion allowing the wire to be released from the terminal strip.

Remove the wire.

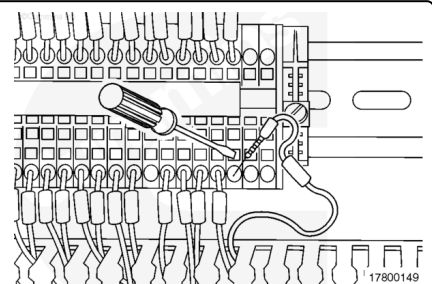


Loosen the terminal strip securing mechanism set screw.

Slide the securing mechanism and terminal strip to free area.

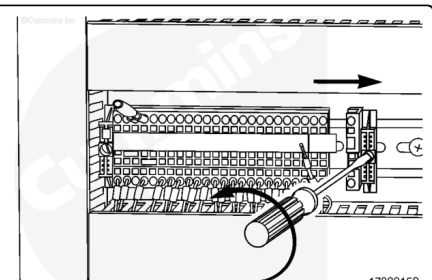

Insert a small flat head screwdriver into the bottom square release.


Move the screwdriver handle in an upward motion to release the terminal strip.

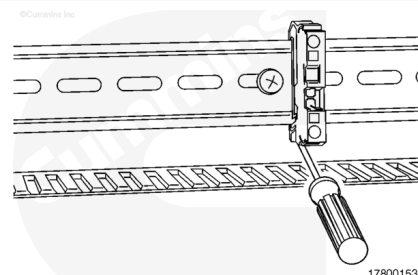

## Circuit Breaker


Make a note of the wire location of the wires on the circuit breaker.

Loosen the set screws and remove the wires.

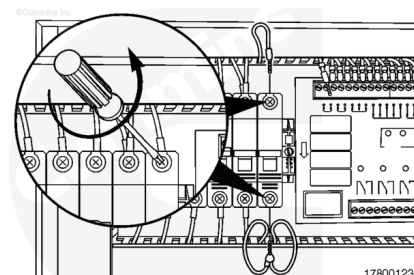

Place a flat head screwdriver in the lower release rectangle and move the handle upward to release the circuit breaker from the track.

Remove the circuit breaker.

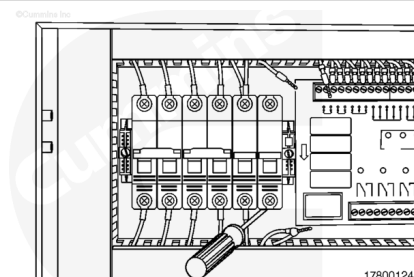


## Logic Unit

Note all locations of the wires on the customer interface box logic unit.

Loosen the set screws on the wires.


Remove the wires from the customer interface box logic unit.

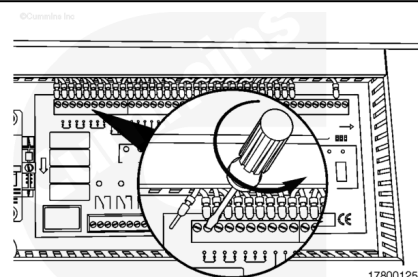

Press down on the top of the customer interface box logic unit.


At the end of travel pull outward on the bottom side.

Remove the customer interface box logic unit.

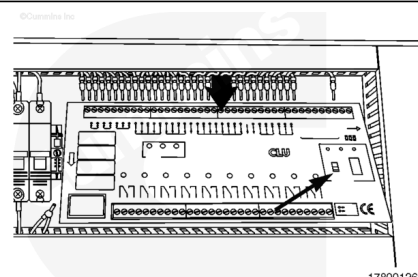

## Conductor


Remove the associated cable tray covers (1).

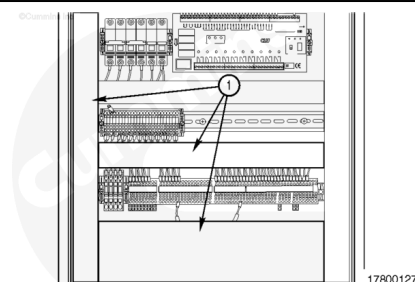

Note the location of the wire to be removed.


Place the screwdriver in the square slot on the terminal strip.

Move the handle in an downward motion and remove the wire.

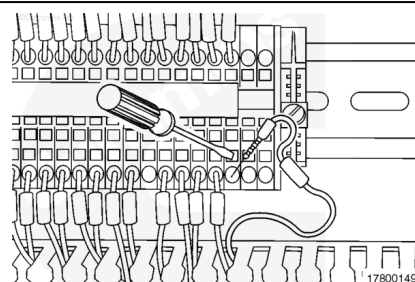

Remove the wire from the cable tray.

Remove the wire from the other connection point.

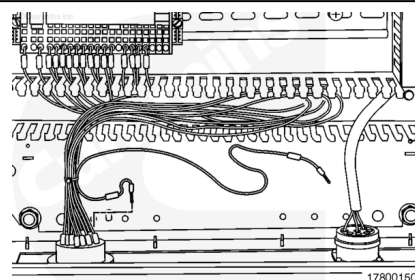

## Install


### Engine Stop Button

Install the button into the front of the panel door.

Lift the switch assembly upper lever and slide it onto the button.


Release the latch and verify the switch assembly is connected to the button.

Tighten the setscrew located at the bottom of the switch assembly.

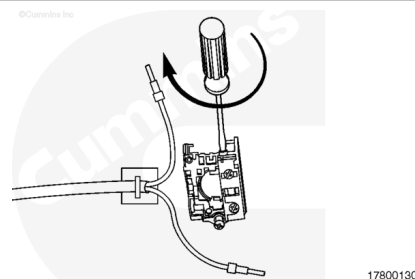

Install the wires in the noted location.

Tighten the wire set screws.




## Terminal Strip

Position the upper leg of the terminal strip onto the track.


Press the lower portion of the terminal strip until it is completely on the track.

Move the terminal strip into position.

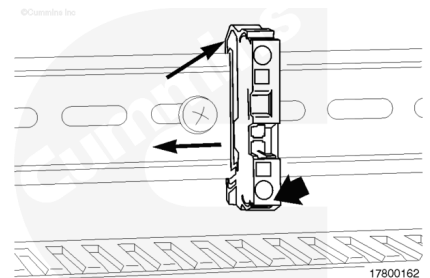

Move the terminal strip securing mechanism to the terminal strip and tighten the setscrew.


Place the screwdriver in the square slot in the terminal strip and move the handle upward and install the wire in the previously noted location.

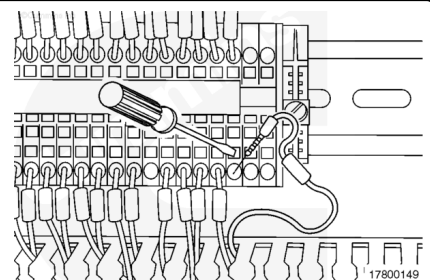


## Circuit Breaker

Place the upper connecting tab on the track.

Push the lower portion of the circuit breaker until it locks onto the track.

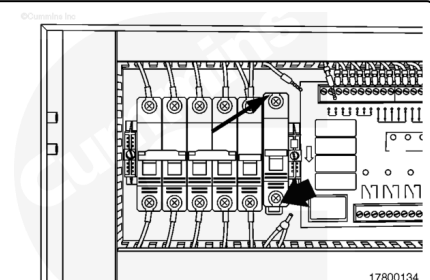


Install the wires into the noted locations and tighten the set screws.

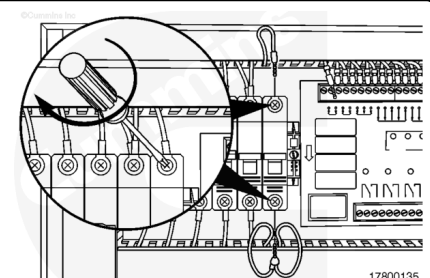


## Logic Unit

Place the upper portion of the logic unit on the track.

Push the lower portion of the logic unit until it locks onto the track.

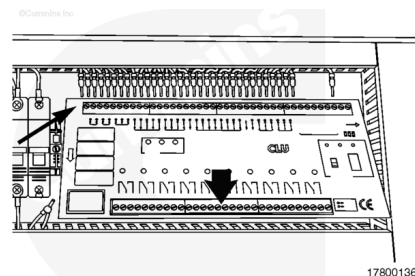


Install the wires into the noted locations and tighten the set screws.

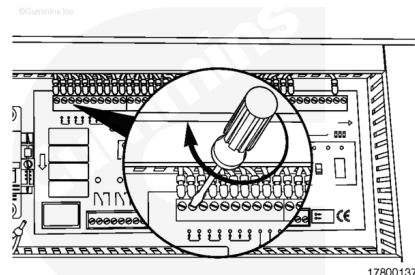


## Conductor

Route the wire through the cable tray to the associated connector.

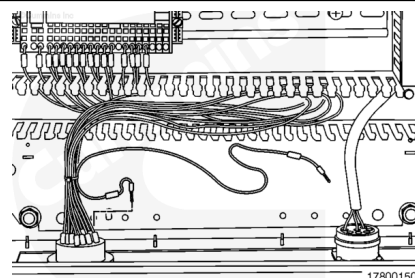

### **⚠ WARNING ⚠**

**To reduce the possibility of personal injury and equipment damage, the wire must have the correct ferrule installed with the stripping and crimp tool.**

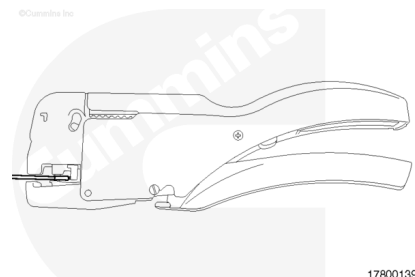


Strip the wire with the stripping and crimp tool Part Number 4918722.

Crimp the new ferrule onto the end of the wire.

Place the screwdriver in the square slot on the terminal strip.

Move the handle in an downward motion and insert the wire.

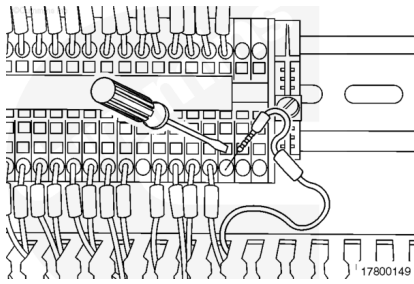

Install the cable tray covers (1).

