

Trainings ▾

General Specifications

For performance and fuel rate values, refer to the engine data sheet or the fuel pump code for the particular model involved.

Engine speedDisplacementBore and stroke	Refer to the fuel pump calibration data for optional speed rating. 23.15 liters [1413 cu in] 170 mm x 170 mm [6.69 in x 6.69 in]
---	---


Engine weight:
Dry 2858 kg [6300 lb]Wet 2905 kg [6404 lb]

Valve and injector settings (cold):
Intake valve adjustment 0.32 mm [0.013 in]Intake valve limits 0.30 to 0.34 mm [0.012 to 0.013 in]Exhaust valve adjustment 0.62 mm [0.024 in]Exhaust valve limits 0.60 to 0.64 mm [0.024 to 0.025 in]Injector OBC method adjustment (in engine) 32 N•m [24 ft-lb]

Compression ratioCrankshaft rotation (viewed from the front of the engine)	16.0:1 Clockwise
--	-------------------------

Firing order	1-5-3-6-2-4
--------------	-------------

--

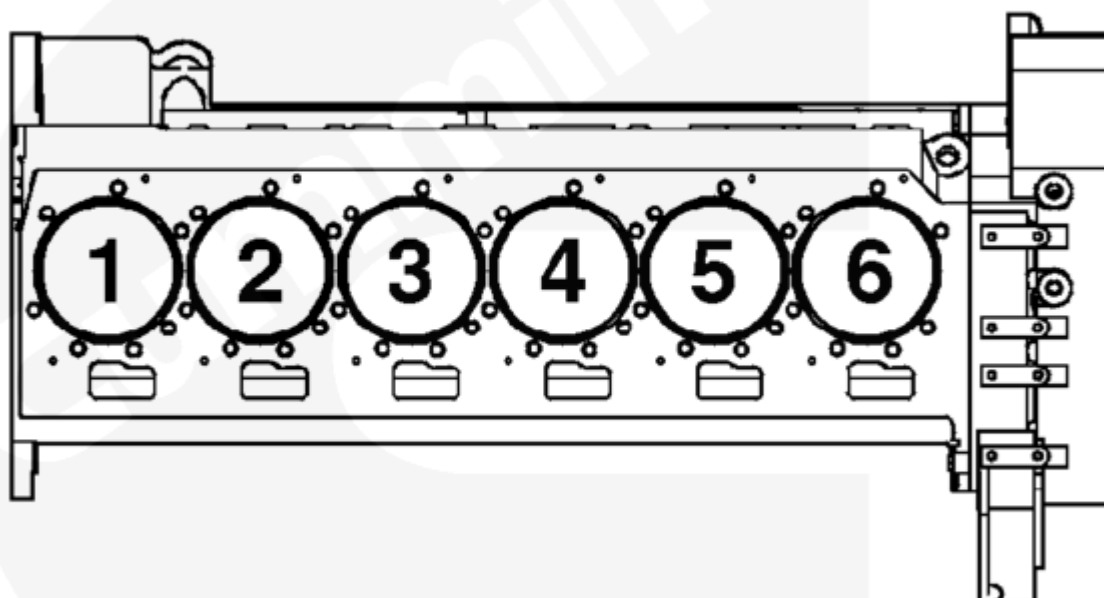


00400152

Cylinder locations.

Front

Rear

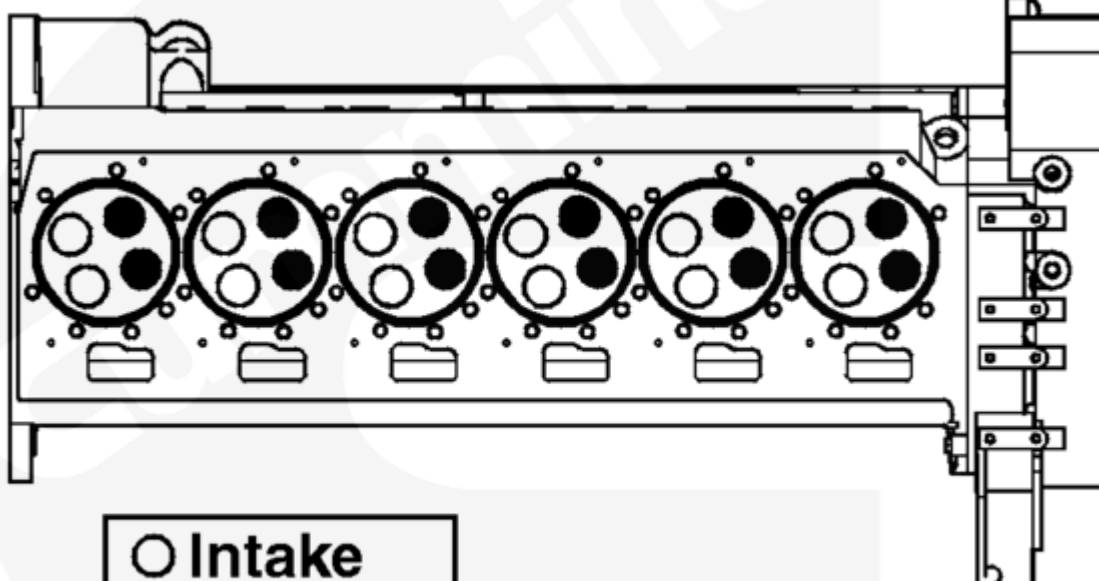

○ Intake
● Exhaust

00400153

Intake and exhaust valve locations.

