


Trainings ▾

Remove

⚠ WARNING ⚠

This component or assembly weighs greater than 23 kg [50 lb]. To prevent serious personal injury, be sure to have assistance or use appropriate lifting equipment to lift this component or assembly.

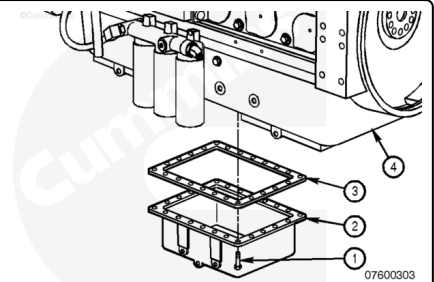

The QSK45 and QSK60 engines use a variety of lubricating oil pan and cover plate configurations. **Only** single and double oil pans are used. When a double oil pan is used, **only** cover plates will be used to cover the remainder of the oil pan adapter. Full length deep and shallow sumps are available as options.

Single oil pans and cover plates are mounted with 24 capscrews and double oil pans are mounted with 38 capscrews.

Remove the capscrews (1), oil pan (2), and gasket (3) from the oil pan adapter (4).

Inspect gaskets for reuse (3).