


Trainings ▾


Drain

The QSK45 and QSK60 engines have various lubricating oil pan configurations. Remove all drain plugs when draining the oil pan.

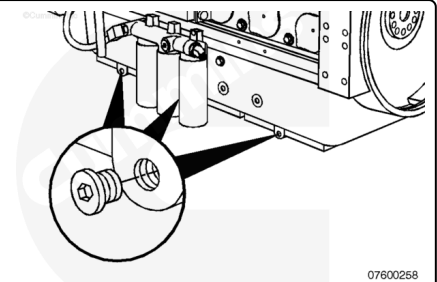

⚠ WARNING ⚠

Some state and federal agencies have determined that used engine oil can be carcinogenic and cause reproductive toxicity. Avoid inhalation of vapors, ingestion, and prolonged contact with used engine oil. If not reused, dispose of in accordance with local environmental regulations.

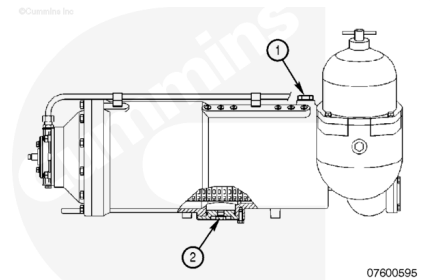

⚠ WARNING ⚠

To reduce the possibility of personal injury, avoid direct contact of hot oil with your skin.

Remove the oil drain plugs and drain the oil immediately to make sure all the suspended contaminants are removed from the engine.

For engines with the Eliminator™ filter system, also drain the oil from the Eliminator™ by removing the vent plug (1) and the oil drain plug (2).

