

Trainings ▾


Remove

QSK45 and QSK60 Single Stage


Remove the two oil drain line capscrews (1).

Remove the oil drain line (2) from the turbocharger (3).

Discard the gasket (4).

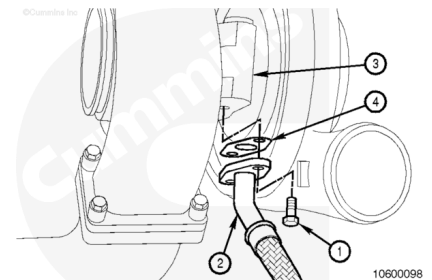


Remove the capscrew securing the drain tube to the engine block. Discard the o-ring.

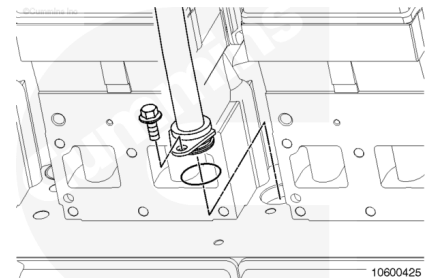

QSK60 Two Stage


Remove the capscrew, nut, and p-clips securing the turbocharger oil drain tube.

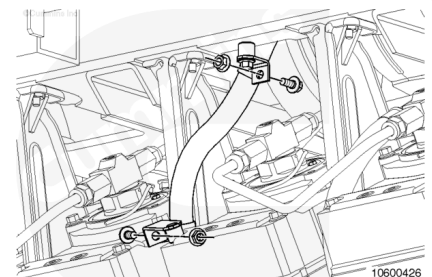


Remove the two oil drain line capscrews (1).

Remove the oil drain line (2) from the turbocharger (3).

Discard the gasket (4).

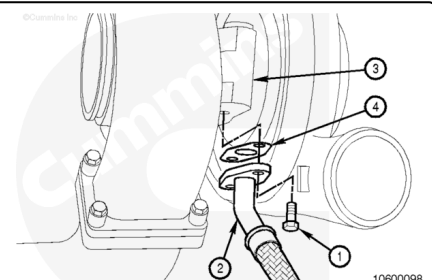


Remove the capscrew securing the drain tube to the engine block. Discard the o-ring.

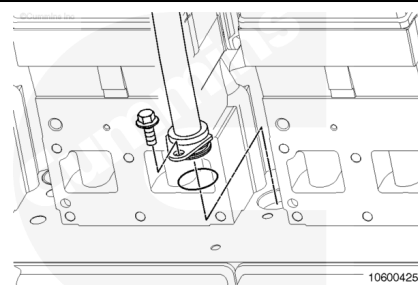

Clean and Inspect for Reuse

⚠ WARNING ⚠

When using solvents, acids, or alkaline materials for cleaning, follow the manufacturer's recommendations for use. Wear goggles and protective clothing to reduce the possibility of personal injury.

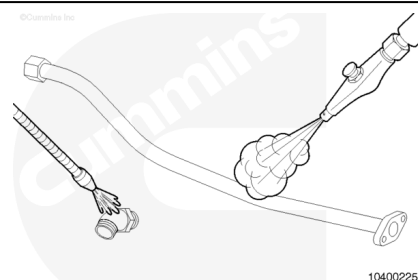

⚠ WARNING ⚠

Some solvents are flammable and toxic. Read the manufacturer's instructions before using.

⚠ WARNING ⚠

Wear appropriate eye and face protection when using compressed air. Fly debris and dirt can cause personal injury.


Use solvent to clean the turbocharger oil drain tube and male union adapter elbow.

Dry with compressed air.

Inspect the turbocharger oil drain line to be sure it is **not** bent, kinked, or damaged in any way.

Inspect the turbocharger drain line for obstructions.

Replace the drain line if any damage or restrictions are found.

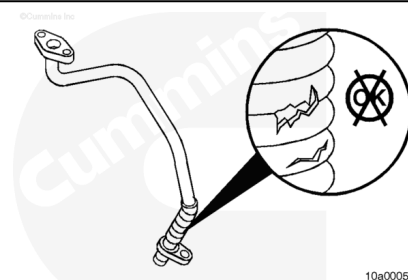


Install

QSK45 and QSK60 Single Stage

⚠ CAUTION ⚠

When installing flexible hoses be sure that all the original clips are fitted and that the hoses do not contact any other hoses or engine components. Interference between hoses and other engine components can lead to leakages and engine damage.

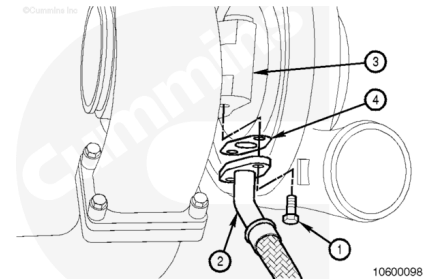

Install a new gasket (4) on the turbocharger oil drain line.

Lubricate the oil drain line mounting capscrows with anti-seize compound, Part Number 3824879.


Install the drain line (2) and two drain line mounting capscrows (1) to the turbocharger (3).

Tighten the turbocharger drain line mounting capscrows.

Torque Value: 45 n•m [33 ft-lb]

Lubricate a new o-ring and install it on the end of the turbocharger oil drain tube.

Attach the turbocharger drain tube to the engine block with the capscrow.

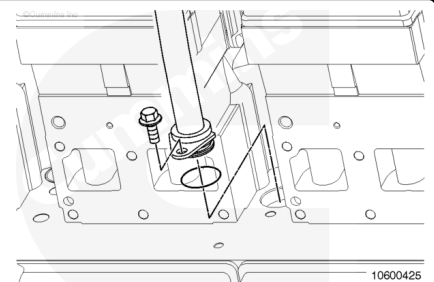


Torque Value: 45 n•m [33 ft-lb]

QSK60 Two Stage

⚠ CAUTION ⚠

When installing flexible hoses be sure that all the original clips are fitted and that the hoses do not contact any other hoses or engine components. Interference between hoses and other engine components can lead to leakages and engine damage.

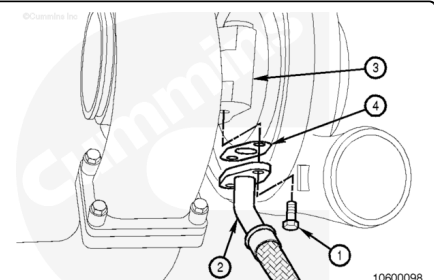

Install a new gasket (4) on the turbocharger oil drain line.

Lubricate the oil drain line mounting capscrews with anti-seize compound, Part Number 3824879.

Install the drain line (2) and two drain line mounting capscrews (1) to the turbocharger (3).


Tighten the turbocharger drain line mounting capscrews.

Torque Value: 45 n•m [33 ft-lb]

Lubricate a new o-ring and install it on the end of the turbocharger oil drain tube.


Attach the turbocharger drain tube to the engine block with the capscrew.

Torque Value: 45 n•m [33 ft-lb]

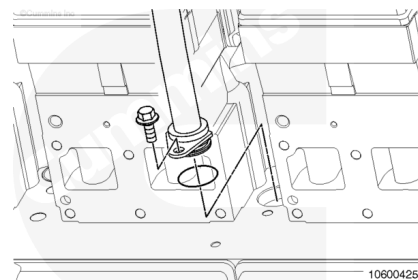

Install the turbocharger oil drain line p-clip, bolt and nut.

Torque Value: 43 n•m [31 ft-lb]

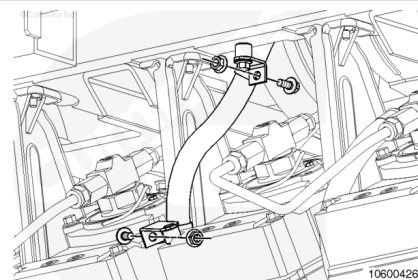

Operate the engine and check for leaks.

