



Technical Service Bulletin

Technical Service Bulletin: tsb100697

Released Date: 08-May-2008

Enlarge Head Gaskets

Enlarge Head Gaskets

Warranty Statement


The information in this document has no effect on present warranty coverage or repair practices, nor does it authorize TRP or Campaign actions.

Contents

This Technical Service Bulletin announces the availability of enlarge head gaskets for QSK45 and QSK60 engines. To maintain proper engine operation, enlarge head gaskets are needed for blocks which have the top surface or deck machined during overhaul.

The following dimensions **must** be measured to determine the correct enlarged head gasket to be used:

- Block deck to crankshaft centerline (1)
- Block deck to crankshaft bore (2).

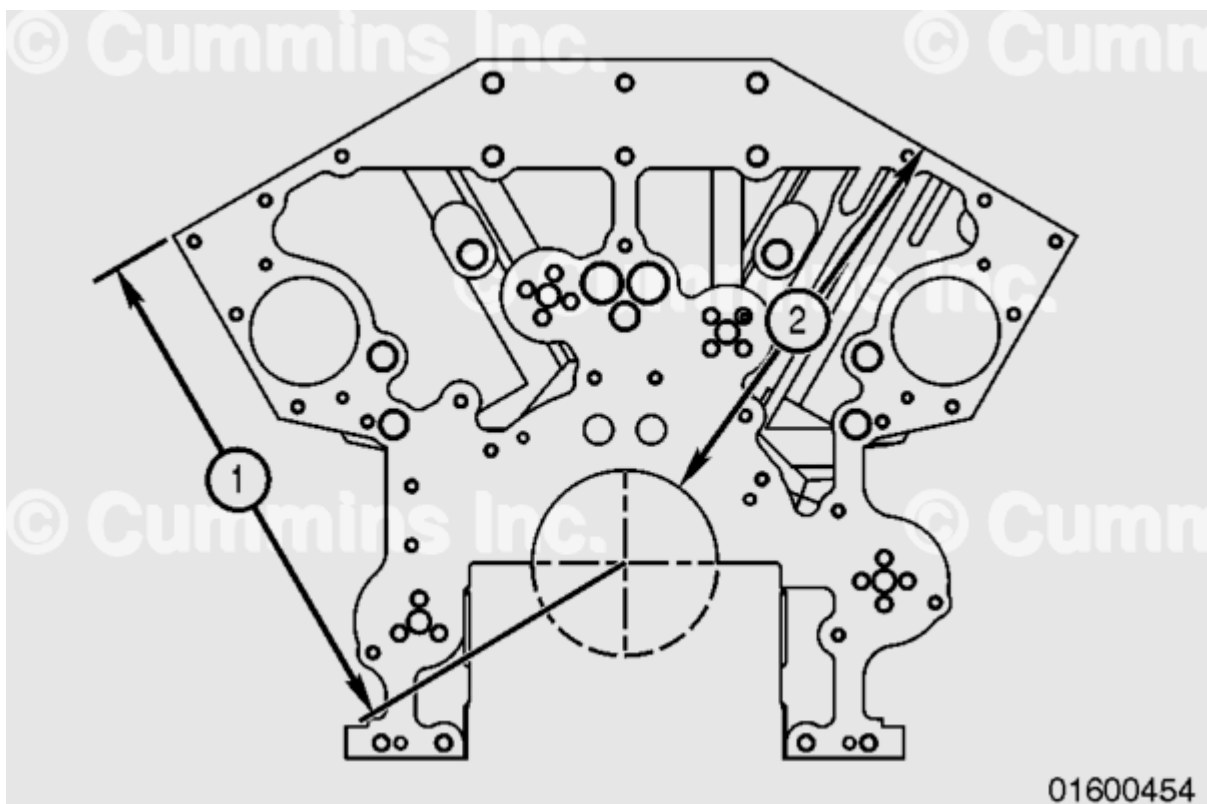

	mm		in
From crankshaft centerline:	529.45	MIN	20.844
	529.75	MAX	20.856
From crankshaft bore:	432.97	MIN	17.046
	433.30	MAX	17.059
	mm		in
For 0.010 oversize gasket:	529.20	MIN	20.835
	529.44	MAX	20.844
For 0.020 oversize gasket:	528.94	MIN	20.824
	529.19	MAX	20.834
For 0.030 oversize gasket:	528.69	MIN	20.815
	528.93	MAX	20.824
	mm		in
For 0.010 oversize gasket:	432.72	MIN	17.036
	432.96	MAX	17.046
For 0.020 oversize gasket:	432.47	MIN	17.026
	432.71	MAX	17.036
For 0.030 oversize gasket:	432.21	MIN	17.016
	432.46	MAX	17.026

Parts Information

Description	Part Number
0.010 Oversize Head Gasket	3635103
0.020 Oversize Head Gasket	4086730
0.030 Oversize Head Gasket	3635104

