



Technical Service Bulletin

Technical Service Bulletin: TSB230043

Released Date: 28-Mar-2023

Injector / Exhaust Gas Temperature Sensor (EGTS) Harness Bracket Conversion and Cable Tie Tension Optimisation to Improve Harness Restraint

Injector / Exhaust Gas Temperature Sensor (EGTS) Harness Bracket Conversion and Cable Tie Tension Optimisation to Improve Harness Restraint

Warranty Statement

The information in this document has no effect on present warranty coverage or repair practices, nor does it authorize TRP or Campaign actions.

Contents

Product Affected

- QSK60 MCRS (All Versions)

Description of Change

- The injector / EGTS harness bracket has been updated to include quantity 4 of 6.5 mm +/- 0.25 mm drillings to accept quantity 2 cable ties per bracket.
- The tension of cable ties has been increased.

Reason for Change

- The addition of cable ties to the bracket more positively locates the injector and EGT wiring at each cylinder location, preventing contact with other components.
- Increased cable tie tension more positively locates the injector and EGT wiring at each cylinder location, preventing contact with other components.

Service Parts

Table 1, Parts Supersession

Part Description	Obsolete Part Number	New Part Number
BRACKET, WIRING RETAINER	5372422	5539888

Resolution

Existing bracket variants can be converted to the new specification using the following instructions:

1. Remove the injector / exhaust gas temperature sensor (EGTS) harness bracket from the engine.
2. Locate and centre punch the injector / exhaust gas temperature sensor (EGTS) harness bracket where holes are to be drilled, marked by the dashed boxes in the diagram in Figure 1.
3. Secure the work piece in a suitable vice.
4. Through drill each location using a 6.5 mm drill bit and suitable drill.
5. Deburr both sides of each drilling, using a suitable deburring tool.
6. Insert cable tie, Part Number 5286859, through the drillings in each location on the injector / exhaust gas temperature sensor (EGTS) harness bracket.
7. Install the injector / exhaust gas temperature sensor (EGTS) harness bracket to the engine.
8. Loosely secure the cable ties around the injector / EGTS harness. Position the harness such that clearance is achieved with the aftercooler cover. Tighten the cable tie. Do **not** to over-tighten the cable tie or damage to the harness may result.
9. Cut off any surplus from the free end of the cable tie, using suitable flush cutters.

New injector / exhaust gas temperature sensor (EGTS) harness bracket variants can also have the harness position optimised and the cable tie replaced, and tension increased, as described in steps 8 and 9 above.

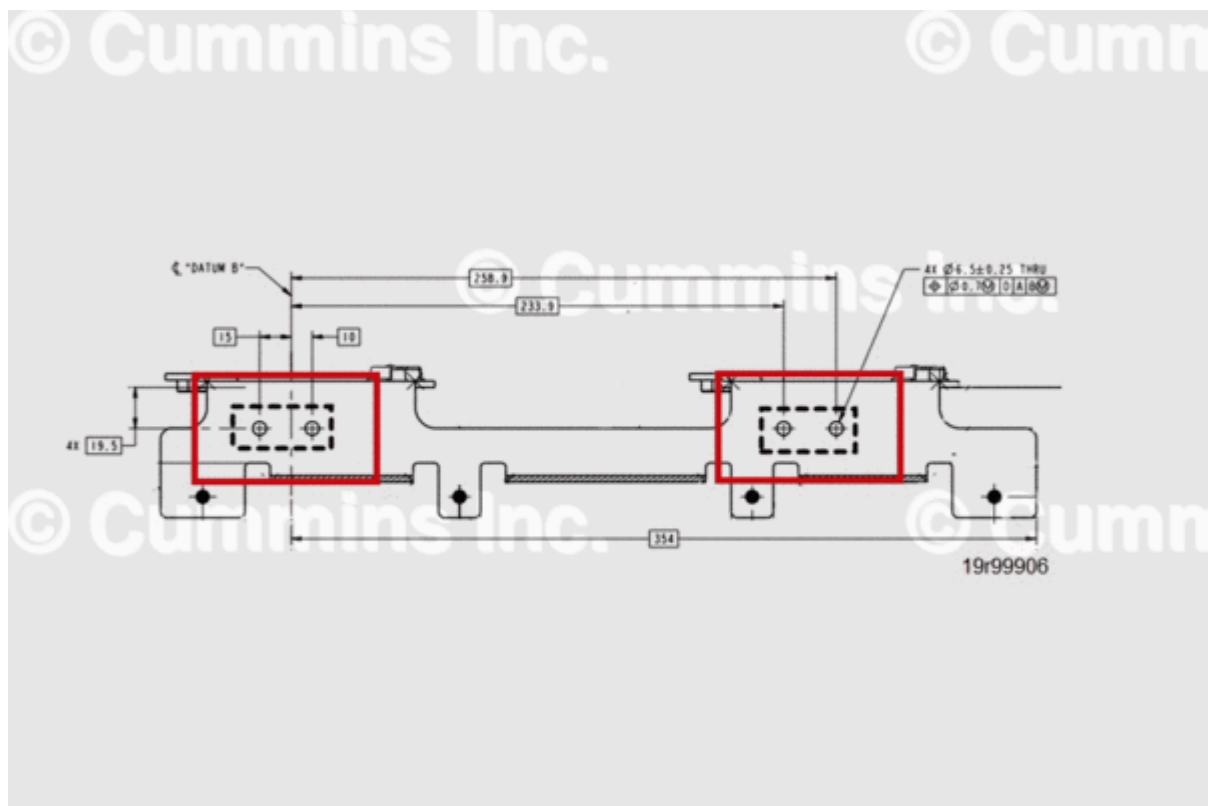


Figure 1, Drilling Locations Indicated by Dashed Boxes.

Document History

Date	Details
2023-2-28	Module Created

Last Modified: 28-Mar-2023
