



Service Tool Instruction

Service Tool Instruction
Number: 3377902

Revision Level:

Released Date: 21-jan-
2003

Description

Depth Gauge Kit

Purpose

This document provides the instructions for using the depth gauge kit, Part Number 3164438, which is used to measure cylinder liner protrusion, injector protrusion, cylinder block counterbore depths, and valve intrusion or protrusion.

©Cummins Inc

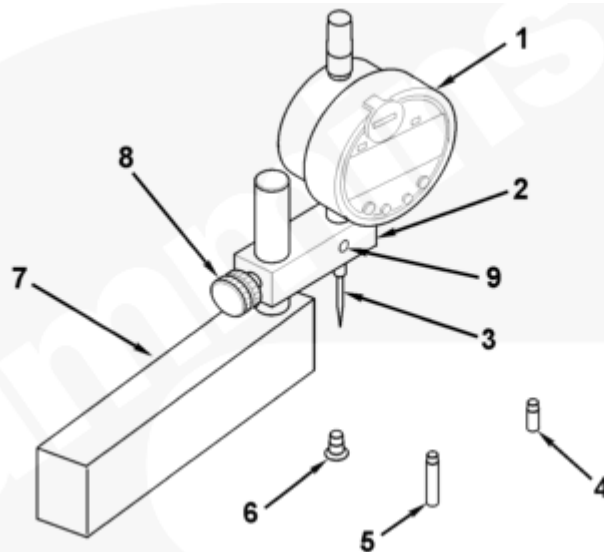



Table 1, Depth Gauge Kit, Part Number 3164438

Item Number	Part Number	Description	Quantity
1	3164441	Digital indicator gauge	1
2	3823498	Gauge mounting adapter	1
3	3376880	Gauge contact point	1
4	3823505	Gauge contact point, 1/2-in	1
5	3823507	Gauge contact point, 1-in	1

Table 1, Depth Gauge Kit, Part Number 3164438			
Item Number	Part Number	Description	Quantity
6	ST 547-5	Gauge contact point, 3/8-in	1
7	3823499	Gauge mounting base	1
8	3823506	Knob	1
9	134388	Socket head capscrew, 10-24 x 5/8	1
Not shown	3823502	Storage case	1
Table 2, Items Used with Depth Gauge Kit, Part Number 3164438, Purchased Separately			
Item Number	Part Number	Description	Quantity
Not shown	3823500	Contact point extension, 3-in	1
Not shown	3823501	Contact point extension, 4-in	1
Not shown	3163329	Liner installer for QSK45 and QSK60	1
Not shown	3375422	Liner installer for QSK19	1
Not shown	3822503	Liner clamp for NT, V28, K19, K38, K50, ISC, C8.3, and ISL	1
Not shown	3823615	Liner installer for NT, N14, V903, V28, and QST30	1
Not shown	3824272	Liner installer for M11, L10, and ISM	1
Not shown	3162461	Liner installer for ISX and Signature	1


Make certain that the cylinder block or cylinder head is clean and free from oil, gasket material, machining burrs, etc.

Adjust the digital indicator gauge location so that the range of travel is adequate to measure the feature (counterbore depth, liner protrusion, injector protrusion, or valve protrusion/intrusion).

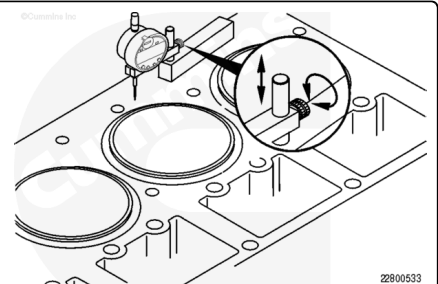


Use the largest diameter gauge contact point that will fit the feature being measured.

Place the depth gauge assembly on the cylinder block or cylinder head and zero the digital indicator gauge.

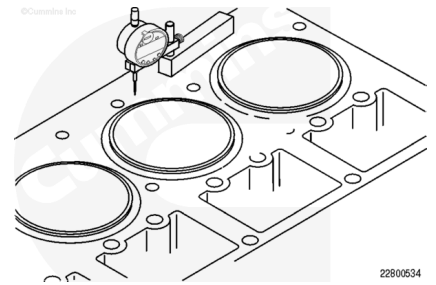

Note : Refer to the appropriate troubleshooting and repair manual for locations to perform measurements, unique instructions, and specifications.

Note : The cylinder liner must be clamped into the cylinder block with the appropriate service tool. See Table 2, Items Used with Depth Gauge Kit, Part Number 3164438, Purchased Separately, for correct liner clamp.

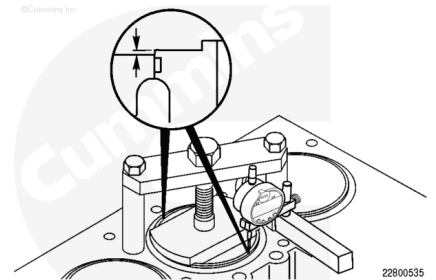

The depth gauge assembly can be used to measure valve intrusion or protrusion, injector protrusion, and cylinder block counterbore depth.

Refer to the appropriate troubleshooting and repair manual to perform measurements for the desired check.

Note : Valve protrusion check is illustrated.

