
Single-phase Residential Hybrid Inverter

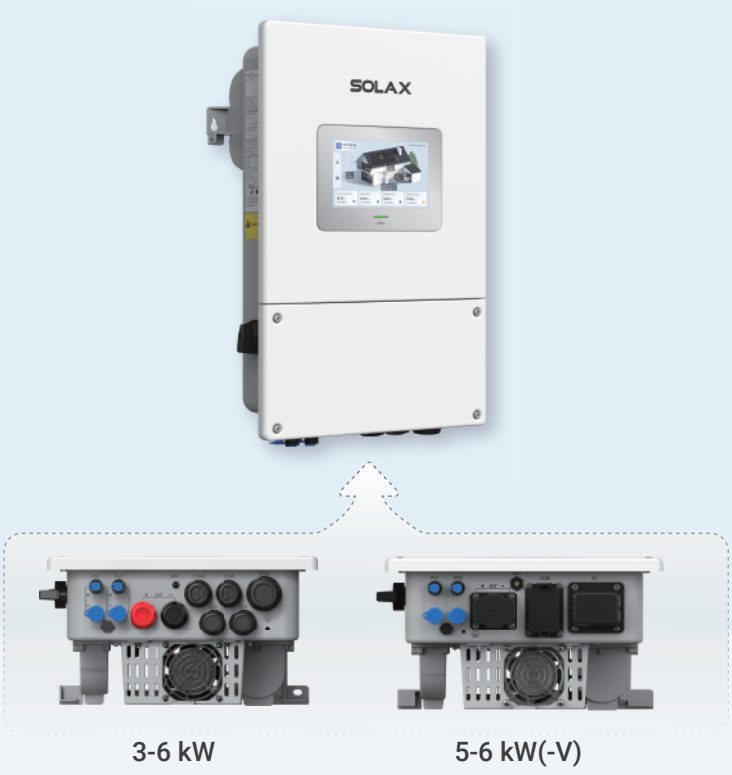

3-6 kW　　5-6 kW(-V)

LVE

3kW / 3.6kW / 5kW / 6kW

Smart Management

- User-friendly 7-inch LCD touch screen with multi-language supported
- Smart Load & Generator Support

Assured Reliability

- IP66 ingress protection
- Type II SPD on AC & DC side
- AFCI protection optional
- Super-backup without battery in off-grid situation

High Performance

- 200% oversizing and 200% PV input power
- Low start-up voltage & Global MPP Scan for higher energy harvest
- Single unit UPS-level switchover time 0ms
- Whisper-quiet operation as low as 30 dB at night*

Flexible Adaptability

- Max. 6 pcs parallel for on-grid and off-grid
- Compatible with multiple third-party batteries

* Performance data is based on tested conditions. Actual results may vary depending on operating conditions

solaxpower　www.solaxpower.com　info@solaxpower.com　+86 571-56260008

V1.0 Information may be subject to modify without notice.　650.00155.00.VN-EN

	LVE3S-S2	LVE3.6S-S2	LVE5S-S2(-V)	LVE6S-S2(-V)
PV INPUT				
Max. recommended PV array power	6000 Wp	7200 Wp	10000 Wp	12000 Wp
Max. PV input voltage①	500 d.c. V			
Rated PV input voltage	380 d.c. V			
Operating voltage range	60 ~ 480 d.c. V			
Start-up voltage	70 d.c. V			
No. of MPP trackers / strings per MPP tracker	1 / 1		2 (1 / 1)	
Max. input current per MPPT	20 d.c. A		20 / 20 d.c. A	
Max. input short circuit current per MPPT	25 d.c. A		25 / 25 d.c. A	
AC INPUT & OUTPUT(ON-GRID)				
Rated output apparent power	3000 VA	3680 VA	5000 VA	6000 VA
Rated output current	13.7 a.c. A@220 a.c. V 13.1 a.c. A @230 a.c. V 12.5 a.c. A@240 a.c. V	16 a.c. A@220 a.c. V 16 a.c. A @230 a.c. V 15.4 a.c. A@240 a.c. V	22.8 a.c. A@220 a.c. V 21.8 a.c. A @230 a.c. V 20.9 a.c. A@240 a.c. V	27.3 a.c. A@220 a.c. V 26.1 a.c. A @230 a.c. V 25 a.c. A@240 a.c. V
Max. output apparent power	3300 VA	3680 VA	5500 VA	6600 VA
Max. output continuous current	15 a.c. A@220 a.c. V 14.4 a.c. A @230 a.c. V 13.8 a.c. A@240 a.c. V	16 a.c. A@220 a.c. V 16 a.c. A @230 a.c. V 15.4 a.c. A@240 a.c. V	25 a.c. A@220 a.c. V 24 a.c. A @230 a.c. V 23 a.c. A@240 a.c. V	30 a.c. A@220 a.c. V 28.7 a.c. A @230 a.c. V 27.5 a.c. A@240 a.c. V
Rated AC voltage	220 / 230 / 240 a.c. V			
Max. AC input apparent power	6000 VA	7360 VA	10000 VA	11000 VA
Max. AC input current	27.3 a.c. A@220 a.c. V 26.1 a.c. A @230 a.c. V 25 a.c. A@240 a.c. V	33.5 a.c. A@220 a.c. V 32 a.c. A@230 a.c. V 30.7 a.c. A@240 a.c. V	45.5 a.c. A@220 a.c. V 43.5 a.c. A@230 a.c. V 41.7 a.c. A@240 a.c. V	50 a.c. A@220 a.c. V 47.9 a.c. A@230 a.c. V 45.9 a.c. A@240 a.c. V
Max. continuous AC passthrough (grid to load)	50 a.c. A			
Rated AC frequency	50 / 60 Hz			
AC frequency range	50 ± 5 / 60 ± 5 Hz			
Adjustable power factor range	~ 1 (0.8 lagging to 0.8 leading)			
BATTERY				
Battery type	Lithium / Lead-Acid			
Battery voltage range	40 ~ 60 d.c. V			
Max. charge / discharge current	70 / 70 d.c. A	90 / 90 d.c. A	120 / 120 d.c. A	135 / 135 d.c. A
EPS (OFF-GRID) OUTPUT (WITH BATTERY)				
Rated EPS apparent power	3000 VA	3680 VA	5000 VA	6000 VA
Peak EPS output power	6000 VA 2 times of rated power, 10s	7360 VA 2 times of rated power, 10s	10000 VA 2 times of rated power, 10s	12000 VA 2 times of rated power, 10s
Rated EPS output voltage, frequency	230 a.c. V, 50 / 60Hz			
Switchover time	0 ms			
EFFICIENCY				
Max. efficiency	97.6%			
European efficiency	97.0%			
ENVIRONMENT LIMIT				
Ingress protection	IP66			
Operating temperature range	-25 ~ +60 °C (> 45°C derating)			
Max. operating altitude	< 2000 m			
Relative humidity	4 ~ 100% RH (condensing)			
Overvoltage category	Mains: Ⅲ, Battery: Ⅱ, PV: Ⅱ			
GENERAL				
Dimensions (W × H × D)	378 × 570 × 200 mm		378 × 570 × 200 mm / 378 × 599 × 200 mm(-V)	
Net weight	14.5 kg		14.5 kg / 14.8 kg(-V)	
Cooling concept	Smart air cooling			
Communication interfaces	CAN, RS485, CT, Meter, WiFi			
Power consumption (night)	< 10 W			
Topology	Transformerless for PV side / HF for battery side			
Certifications	LVD, EMC, RED, IEC 61683, IEC 60068, EN50530, IEC 61727, IEC 62116, PDC, EN 50549 -1&-10, NRS097-2-1, BESF, PEA&MEA, BIS			
PROTECTION				
Protections	Over / under voltage protection, DC isolation protection, Grid monitoring, Over temperature protection			
Surge protection	DC: Type Ⅱ, AC: Type Ⅱ			
Arc-fault circuit interrupter (AFCI)	Optional			

① The maximum input voltage is the upper limit of the DC voltage. Any higher input DC voltage would probably damage inverter