

# NRF24L01 versus NRF24L01 PA/LNA


*Matched 60 s workload: 32-byte frames, 1 Mbps, 15 ms host gap, 3.3 V*

—■ NRF24L01 TX

- - ▲ NRF24L01 PA/LNA TX

Total average power

A

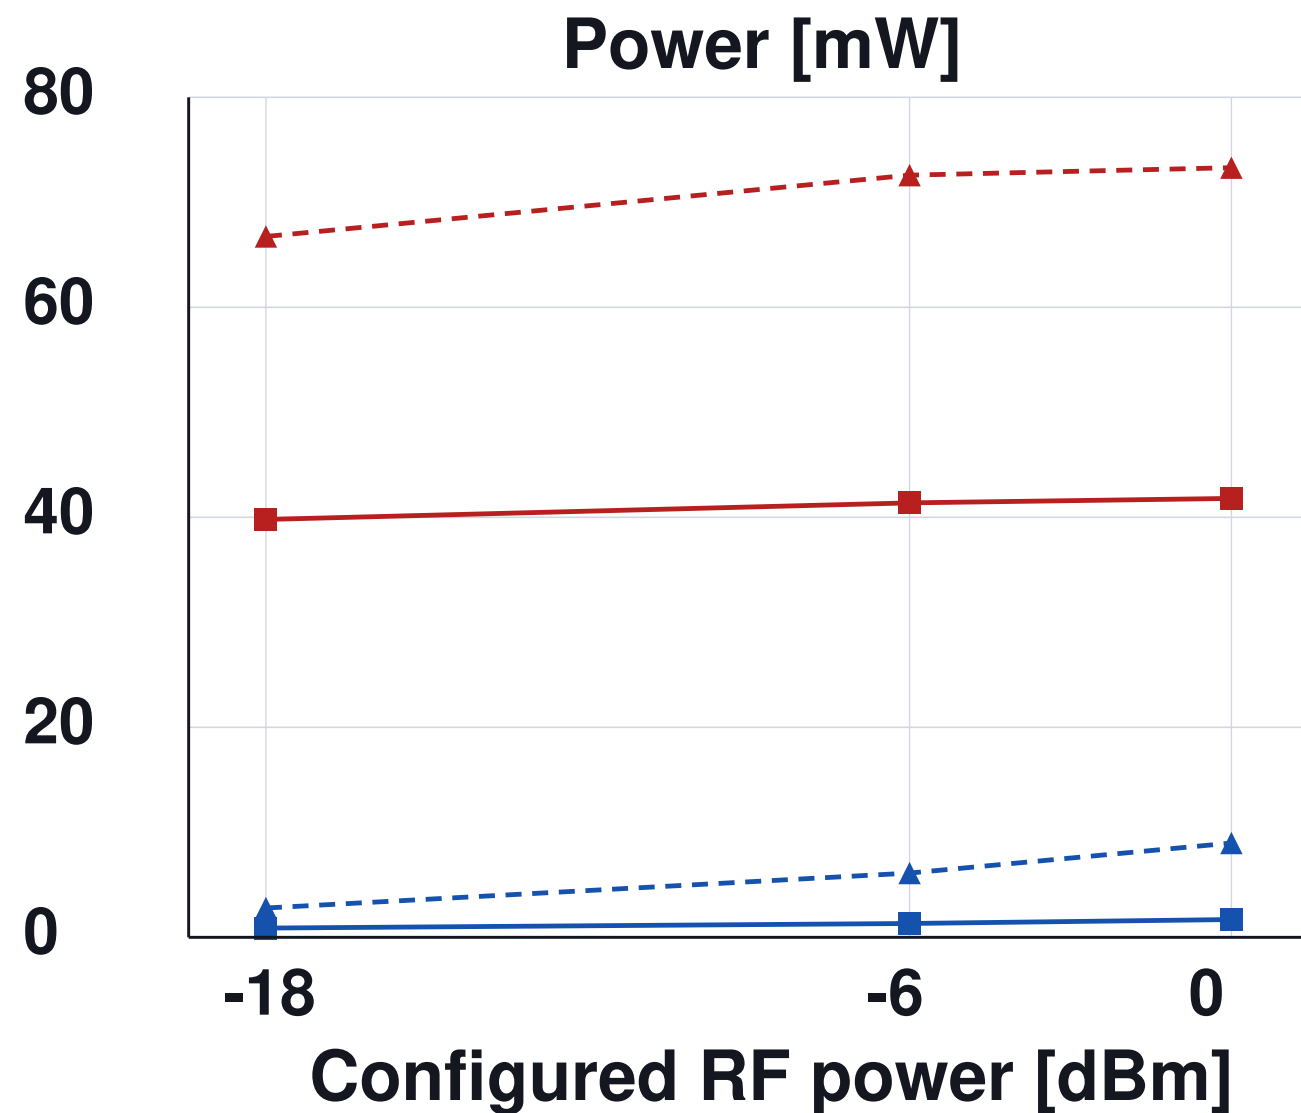


—■ NRF24L01 RX

- - ▲ NRF24L01 PA/LNA RX

Mean power above standby

B

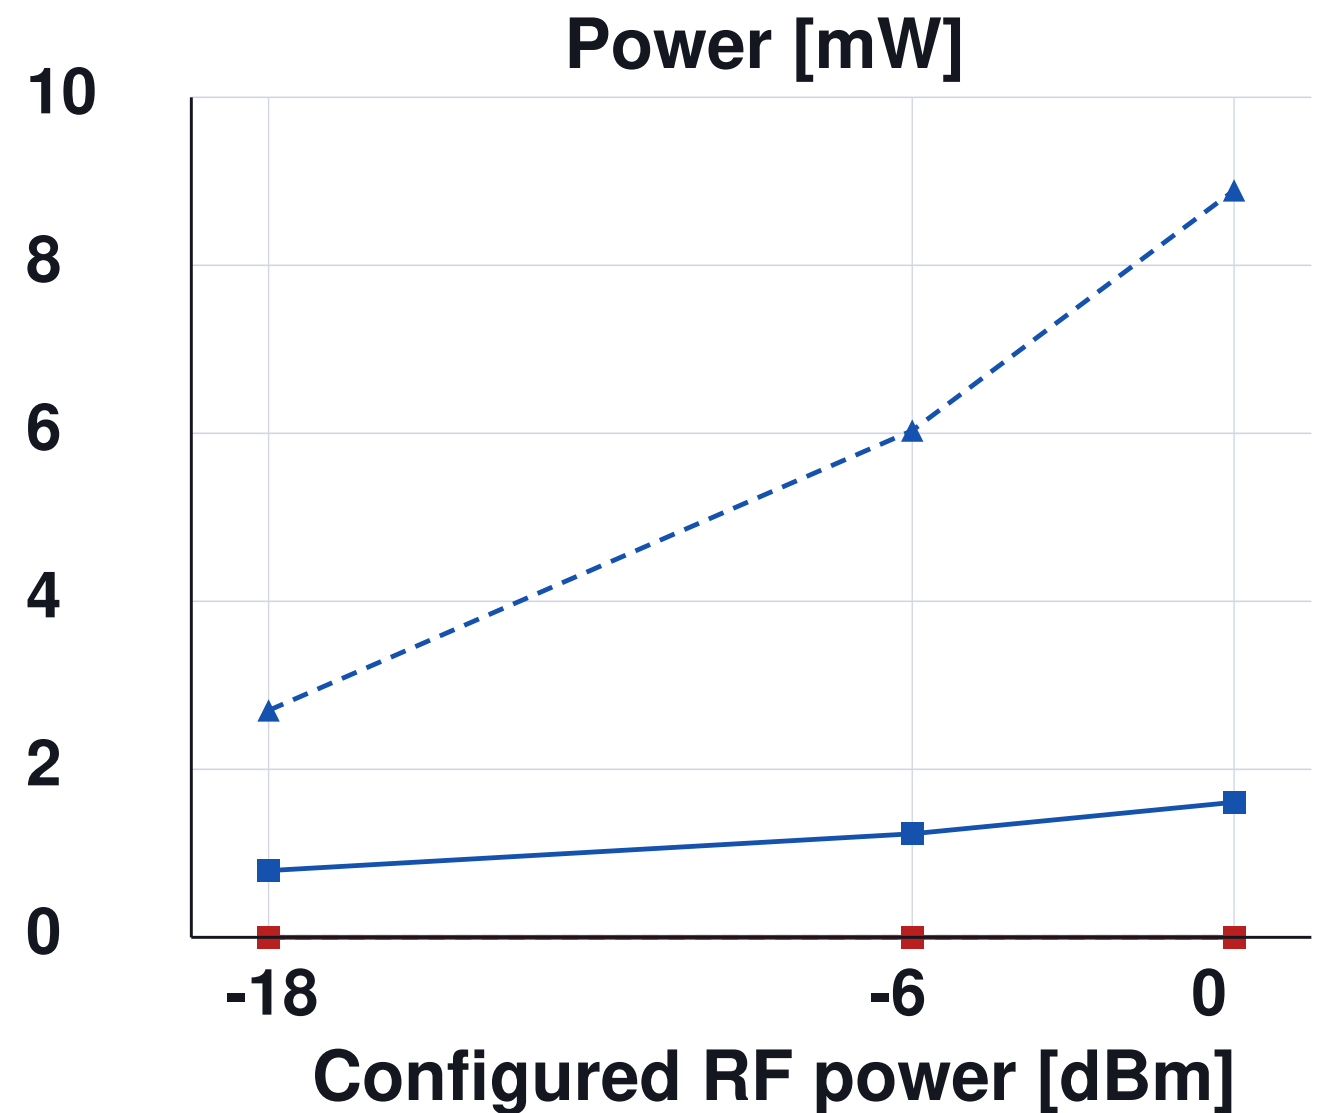

*Each point is a 60 s mean at 3.3 V.*

*Negative excess values are clipped to zero by the campaign pipeline.*