

TX energy versus measured logical payload size (continued)


Fastest tested mode and highest tested configured power per module; logarithmic energy axis

Direct LoRa and modem implementations

- **Ai-Thinker RA-01H**
- **Ai-Thinker RA-08**
- ▲ **Ebyte E22-400M30S**
- **XL1276-D01**
- ▲ **Ai-Thinker RA-01SH**
- **Ai-Thinker RA-09**
- **Ebyte E28**

TX packet energy [mJ]

C

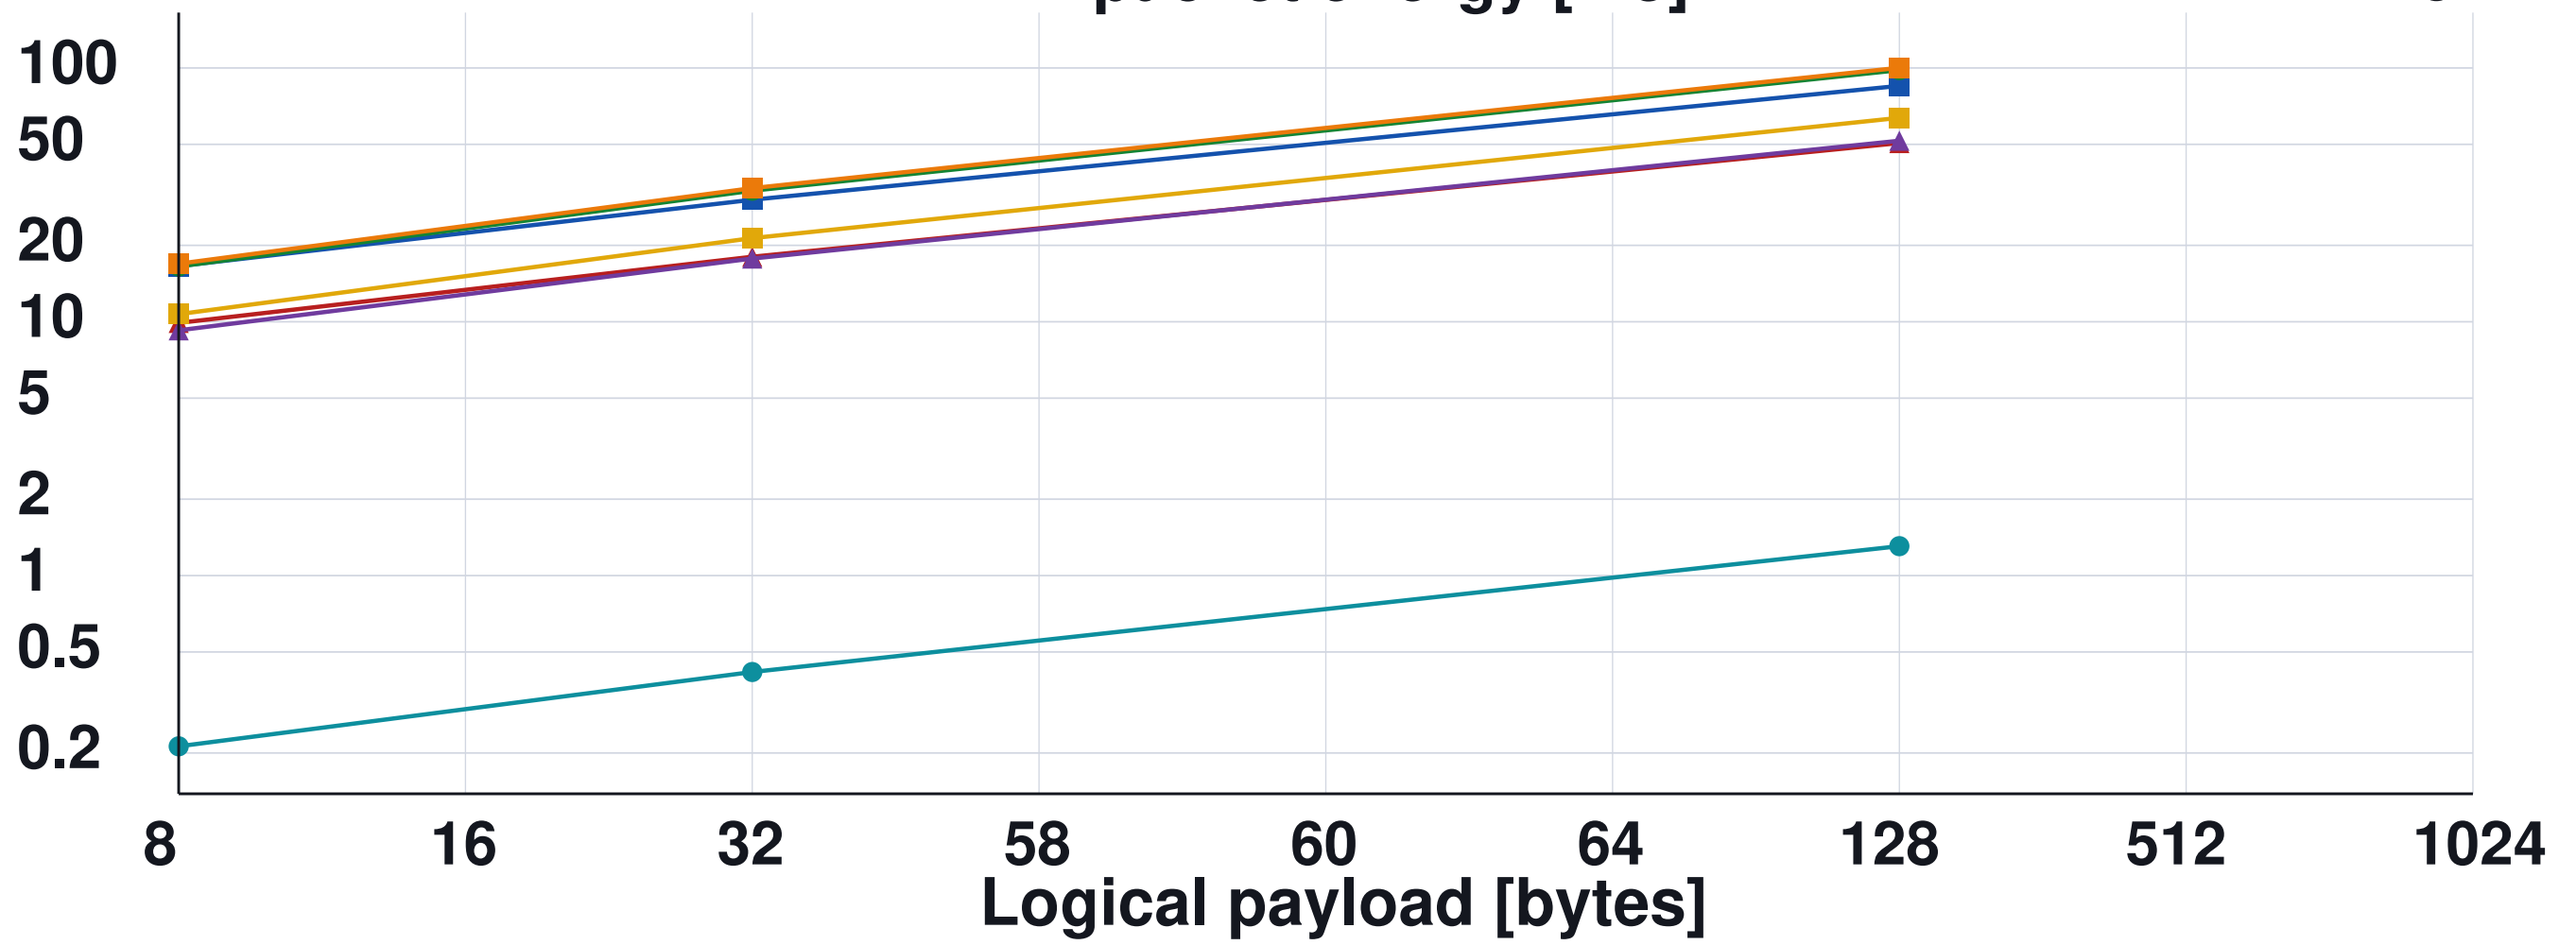

SX1278 physical variants

- **Adafruit level-shifter board**
- **RA-02 + 2 capacitors**
- ▲ **Shielded radio module**
- ▲ **Ai-Thinker RA-02**
- **Carrier PCB + 2 capacitors**
- **Unshielded radio module**

TX packet energy [mJ]

D

