

RX energy versus measured logical payload size

Fastest tested mode and highest tested configured power per module; logarithmic energy axis


CC1101 boards and E07 modules

- CC1101 V1 433 MHz (CC1101)
- Ebyte E07-400M10S (CC1101)
- ▲

 Ebyte E07-900MM10S (CC1101)
- ▲

 CC1101 V2 868 MHz (CC1101)
- Ebyte E07-433M20S (CC1101 + PA/LNA)

RX packet energy [mJ]

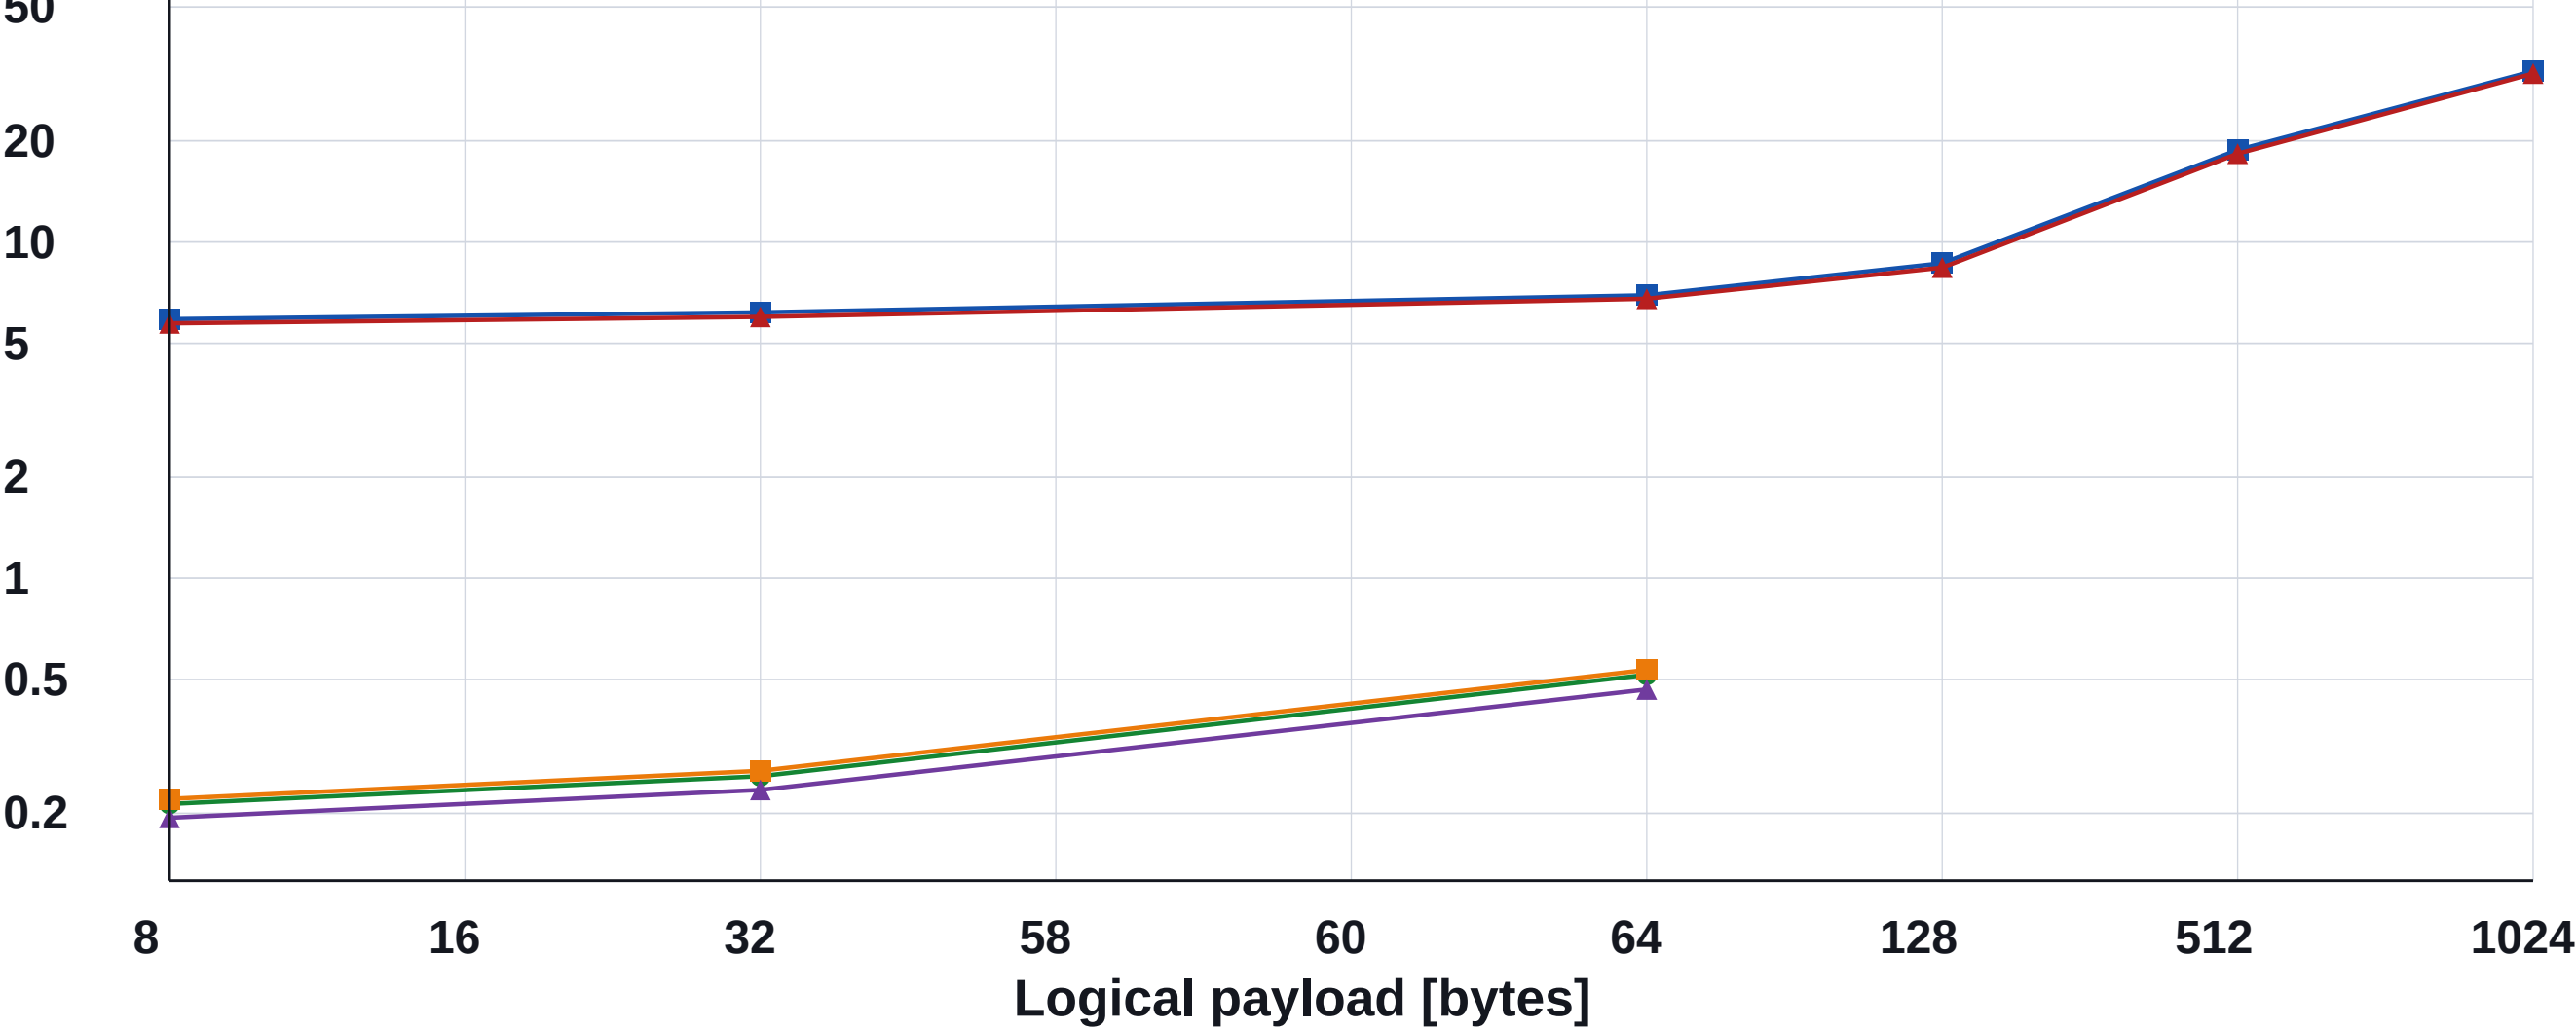

FSK and transparent high-rate modules

- Ebyte E280-2G4T12S (SX1280)
- Ebyte E79-400DM2005S via ESP32 (CC1352P)
- ▲

 NRF24L01 (nRF24L01+)
- ▲

 Ebyte E79-400DM2005S via CH9340C (CC1352P)
- HC-12 (Si4463)
- NRF24L01 PA/LNA (nRF24L01+)

RX packet energy [mJ]

