
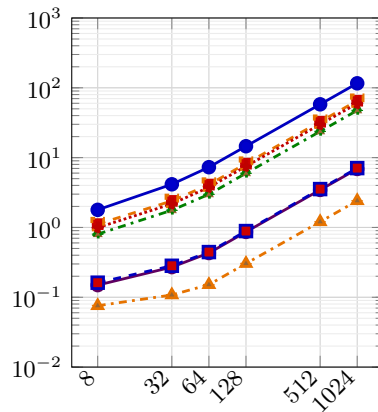
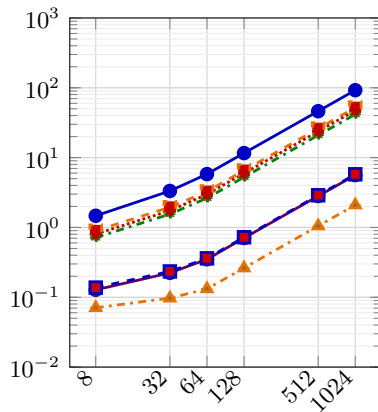


Ebyte E79-400DM2005S (CC1352P AT modem): reanalysed energy versus logical payload

$P_{TX} = -20$ dBm

$P_{TX} = 0$ dBm

$P_{TX} = 13$ dBm

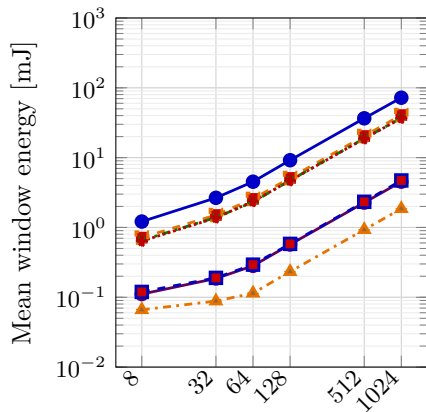

Logical transfer size [B]

Logical transfer size [B]

Logical transfer size [B]

—●— SLR2K5 (2.5 kbps) —■— GFSK4K8 (4.8 kbps) —◆— OOK4K8 (4.8 kbps) —+— SLR5 (5 kbps) —●— GFSK50 (50 kbps) —■— IEEE154G50 (50 kbps) —▲— GFSK200 (200 kbps)

TX sums modeled-airtime frame windows; inter-frame gaps are excluded. Mean of 5 repetitions; error bars show standard deviation. Logical transfers above 64 B are fragmented into physical frames of at most 64 B; both axes are logarithmic.