

NRF24L01 versus NRF24L01 PA/LNA


Matched 60 s workload: 32-byte frames, 1 Mbps, 15 ms host gap, 3.3 V

—■ NRF24L01 TX

- - ▲ NRF24L01 PA/LNA TX

Total average power

A

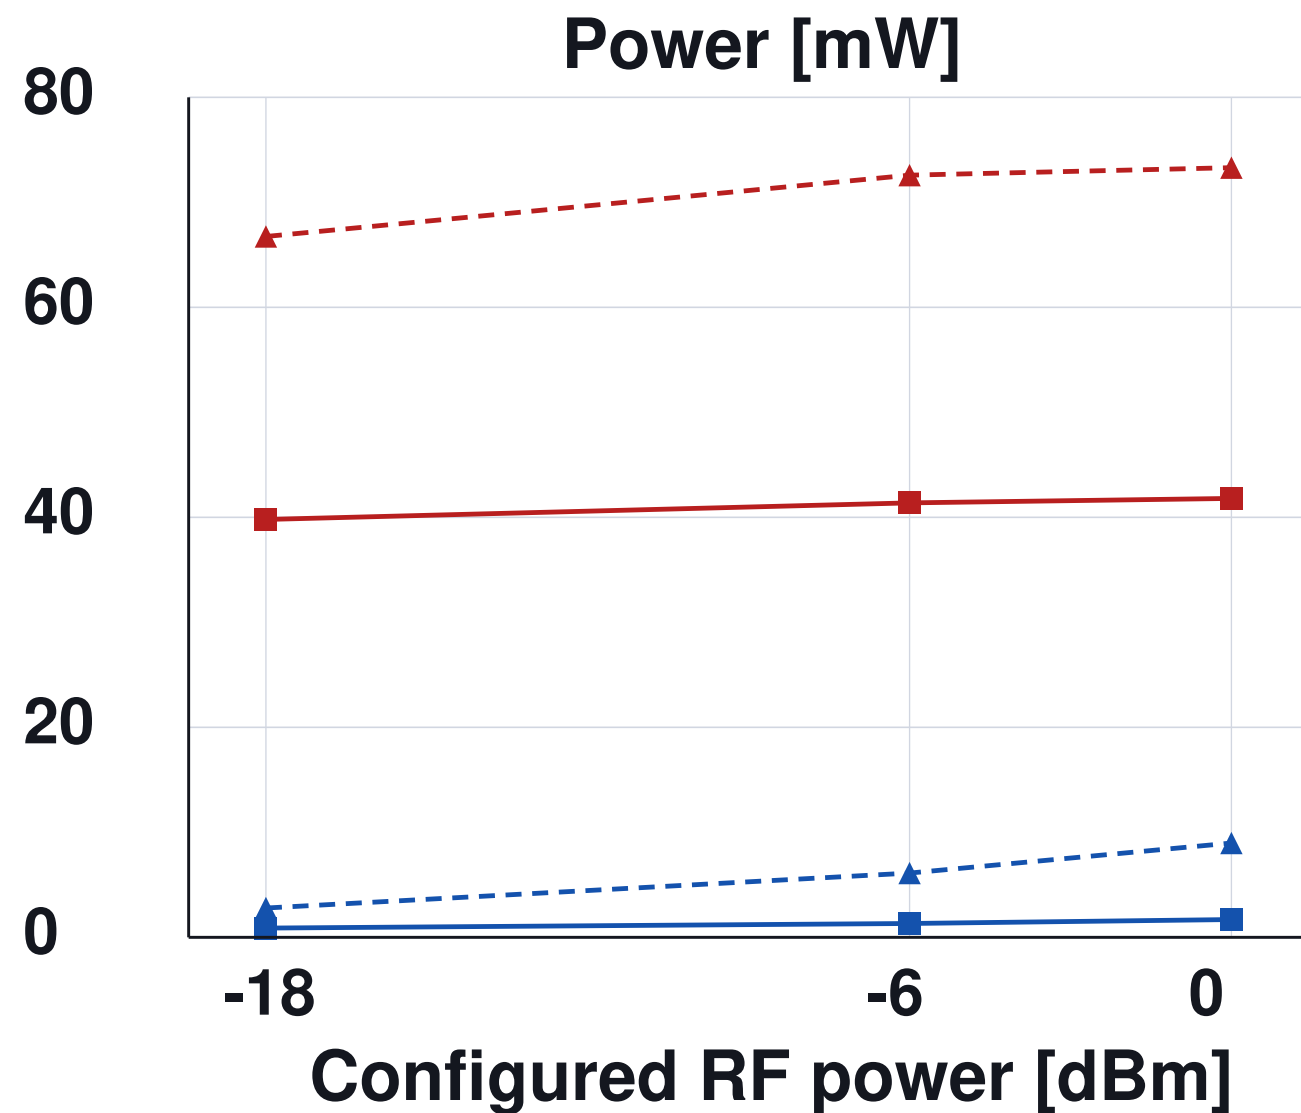


—■ NRF24L01 RX

- - ▲ NRF24L01 PA/LNA RX

Power above pre-trigger baseline

B

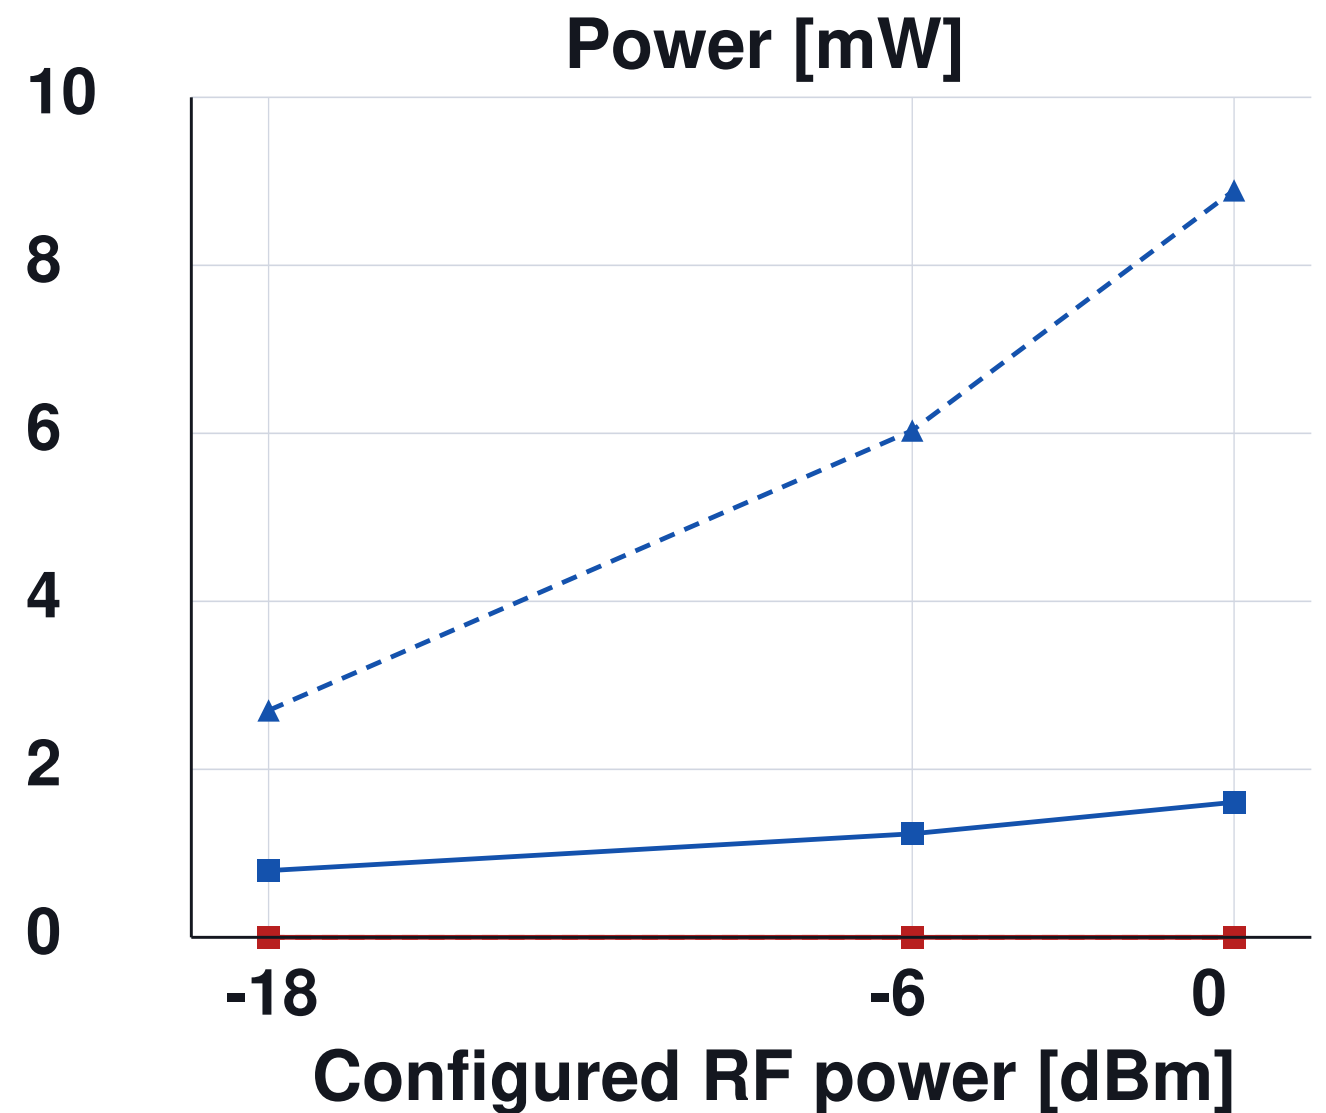

Each point is a 60 s mean at 3.3 V.

Negative excess values are clipped to zero by the campaign pipeline.