


SX1278 physical-implementation comparison (continued)

Matched 60 s workload: 32-byte frames, SF9/BW125, 15 ms host gap, 3.3 V

- **Ai-Thinker RA-02**
- **Adafruit level-shifter board**
- ▲ **Carrier PCB + 2 capacitors**
- ▲ **RA-02 + 2 capacitors**
- **Unshielded radio module**
- **Shielded radio module**


TX power above pre-trigger baseline [mW]

C

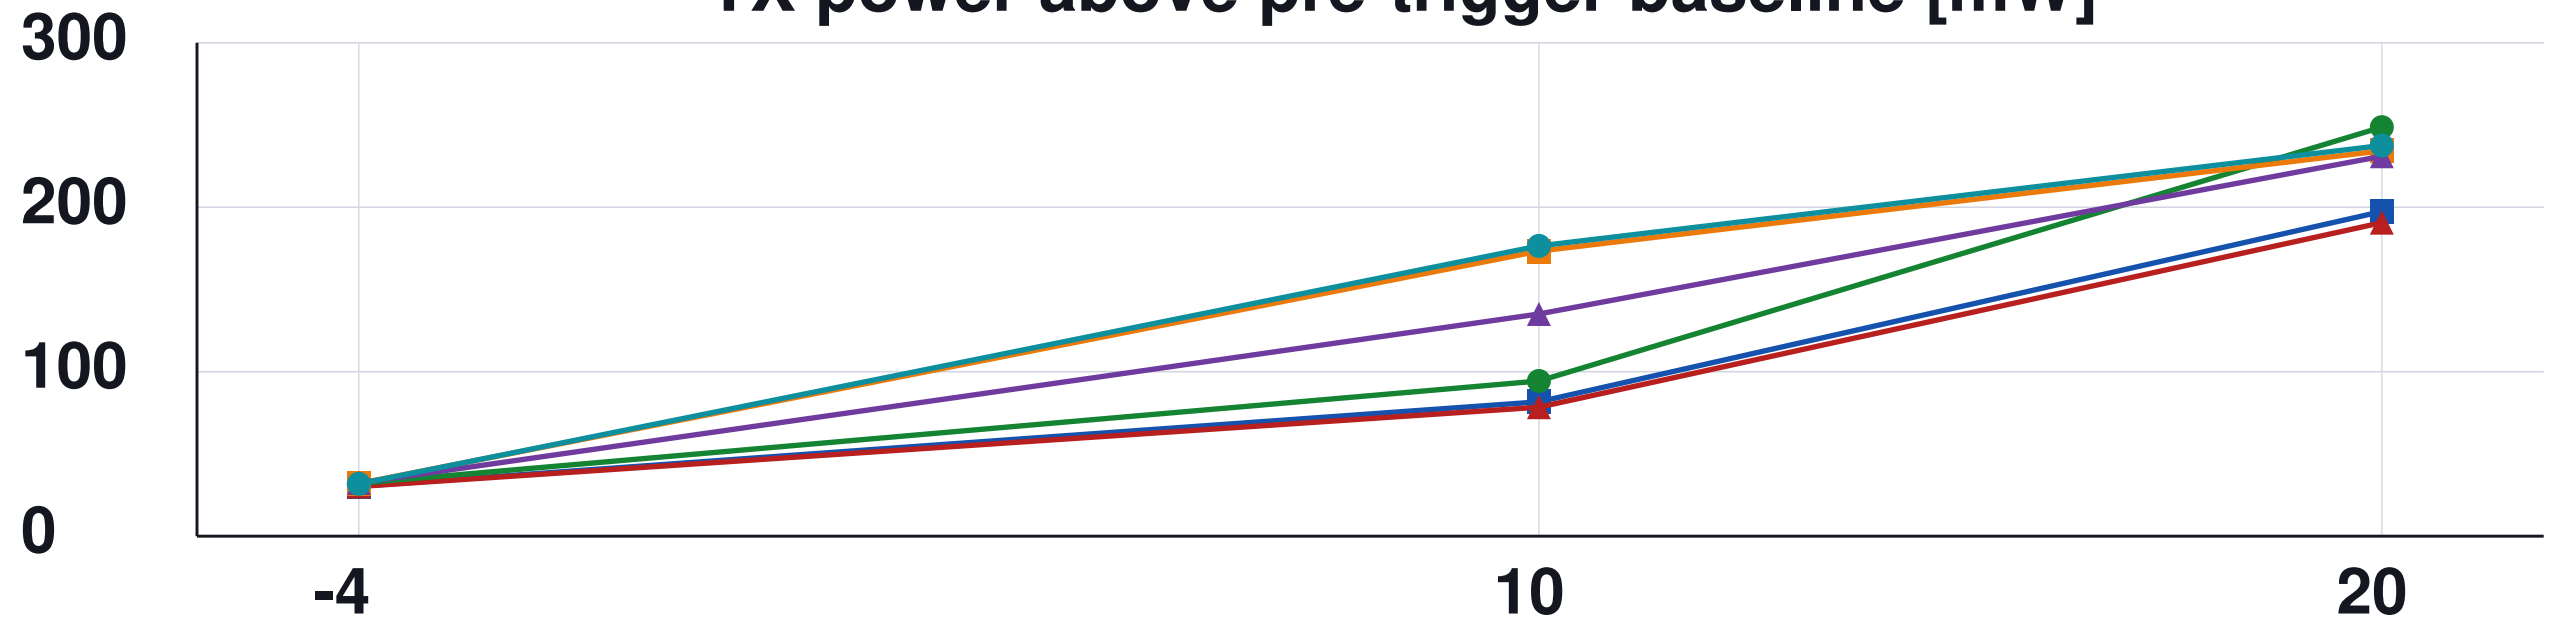

RX power above pre-trigger baseline [mW]

D

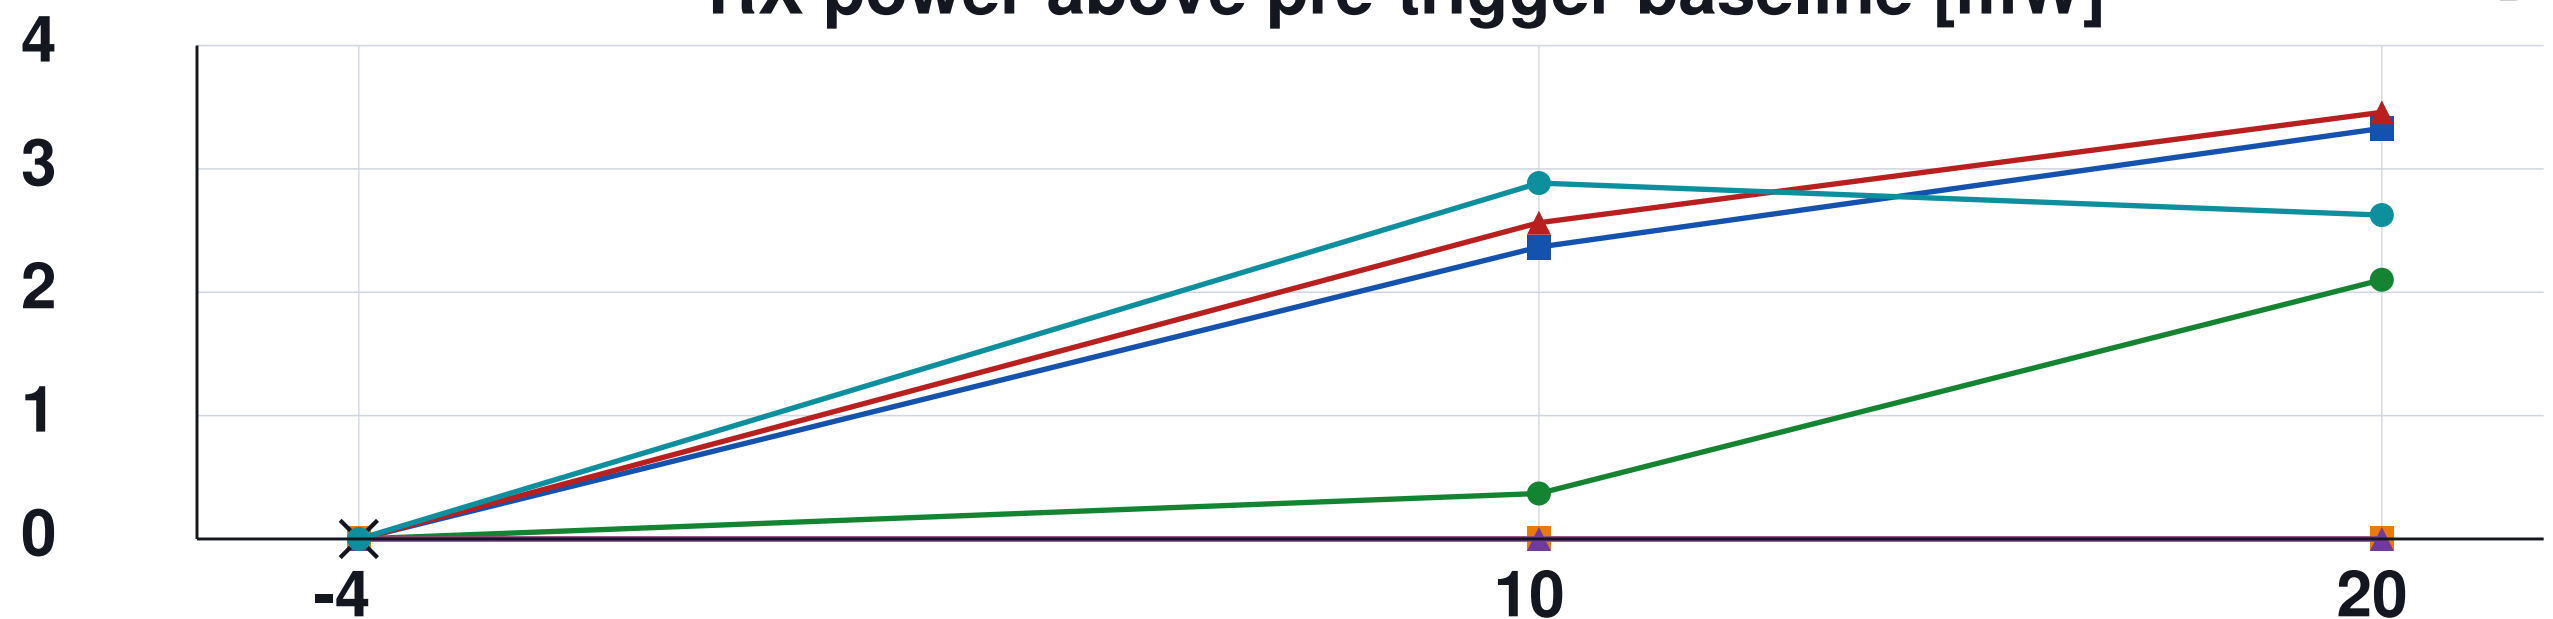

Configured RF power [dBm]