

TX energy versus measured logical payload size

Fastest tested mode and highest tested configured power per module; logarithmic energy axis

CC1101 boards and E07 modules


■ CC1101 V1 433 MHz

● Ebyte E07-400M10S

▲ Ebyte E07-900MM10S

▲ CC1101 V2 868 MHz

■ Ebyte E07-433M20S

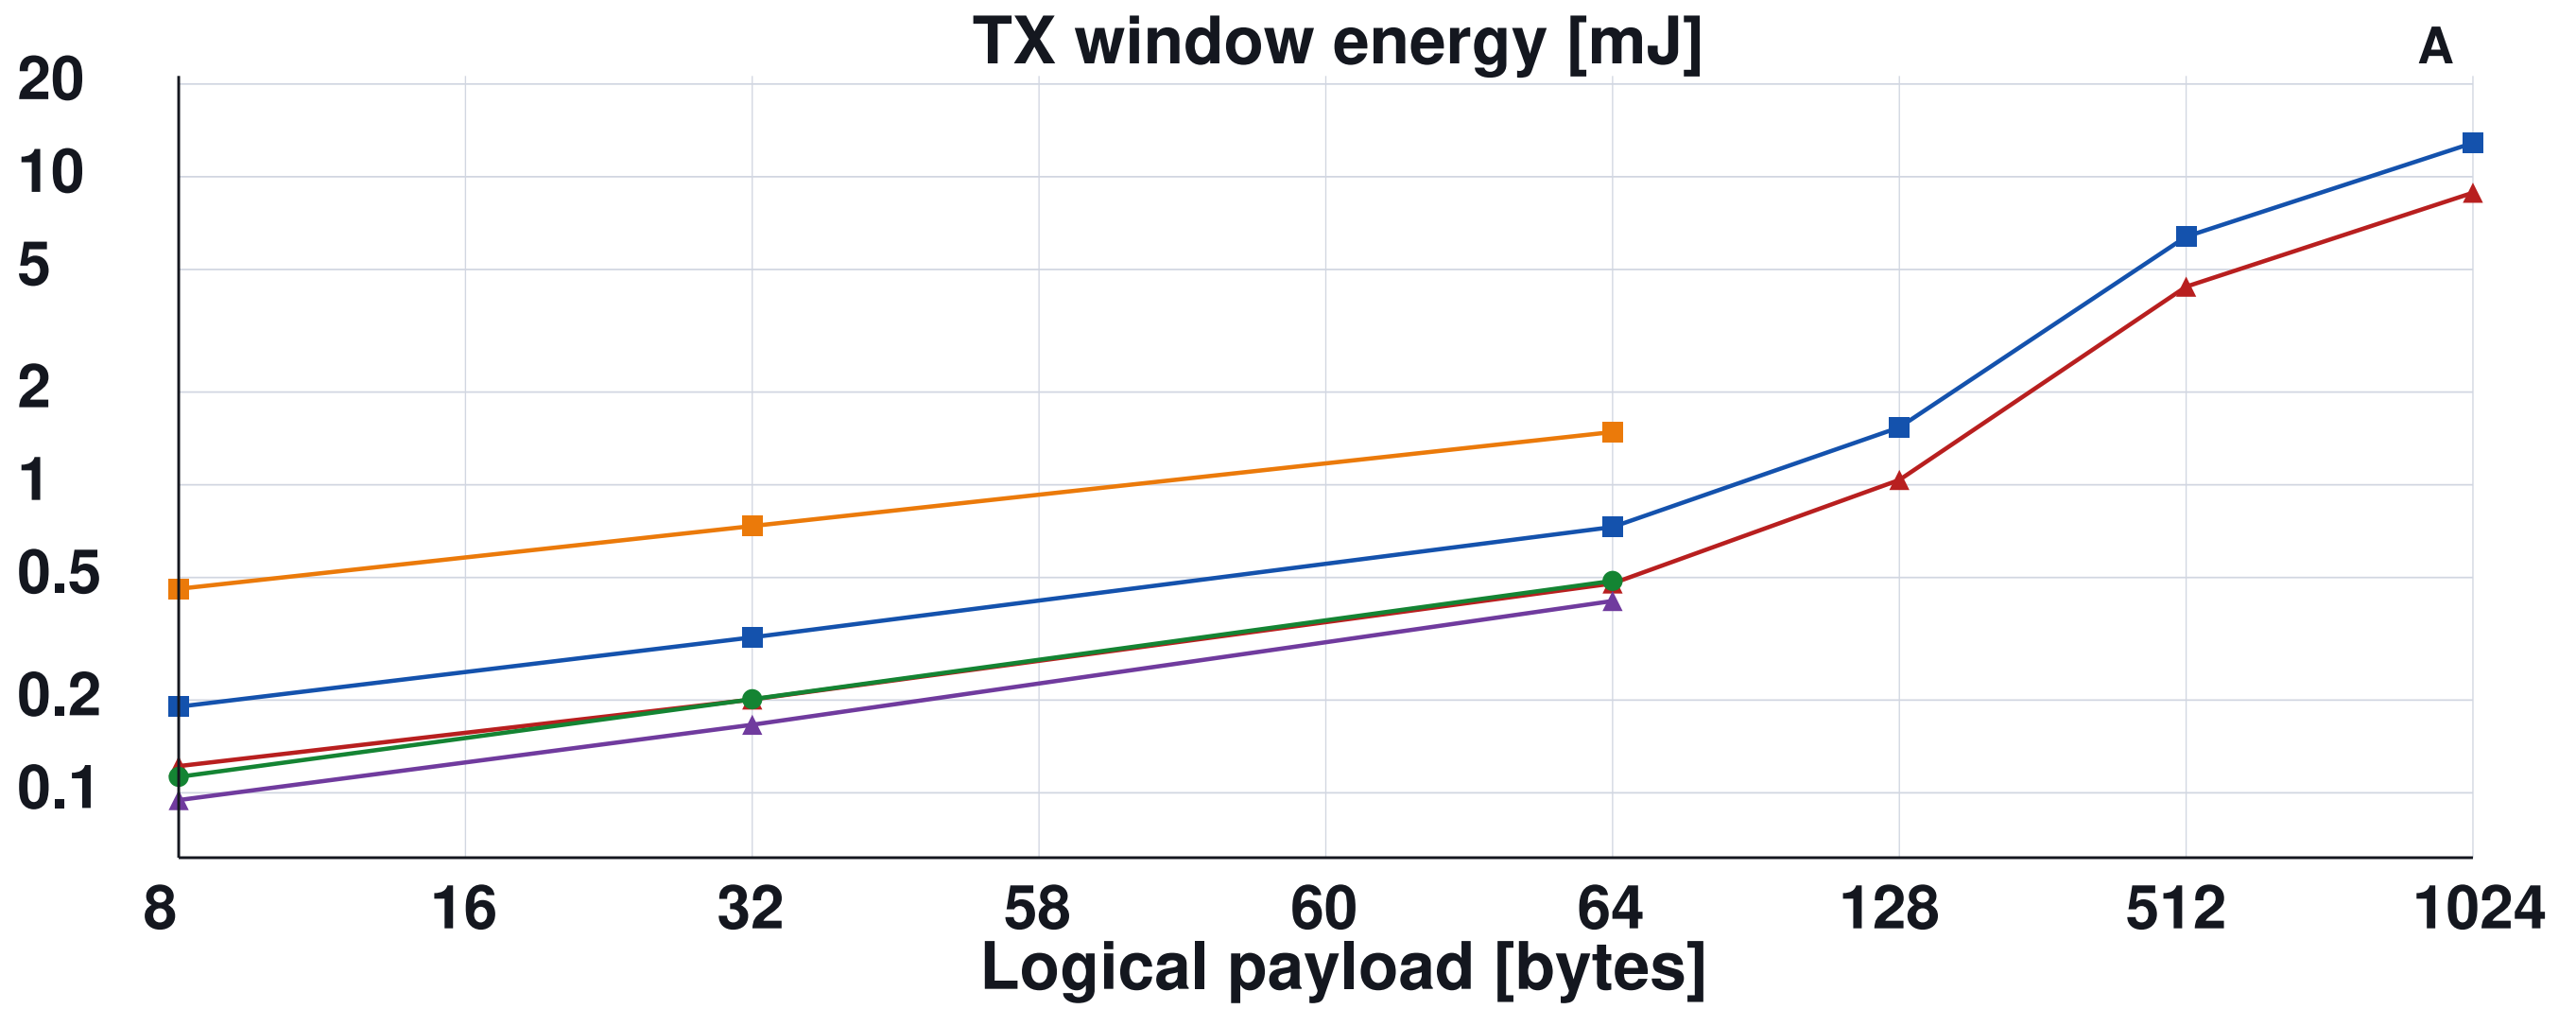

FSK and transparent high-rate modules

■ Ebyte E280-2G4T12S


● E79 via ESP32

▲ NRF24L01

▲ E79 via CH9340C *

■ HC-12

● NRF24L01 PA/LNA

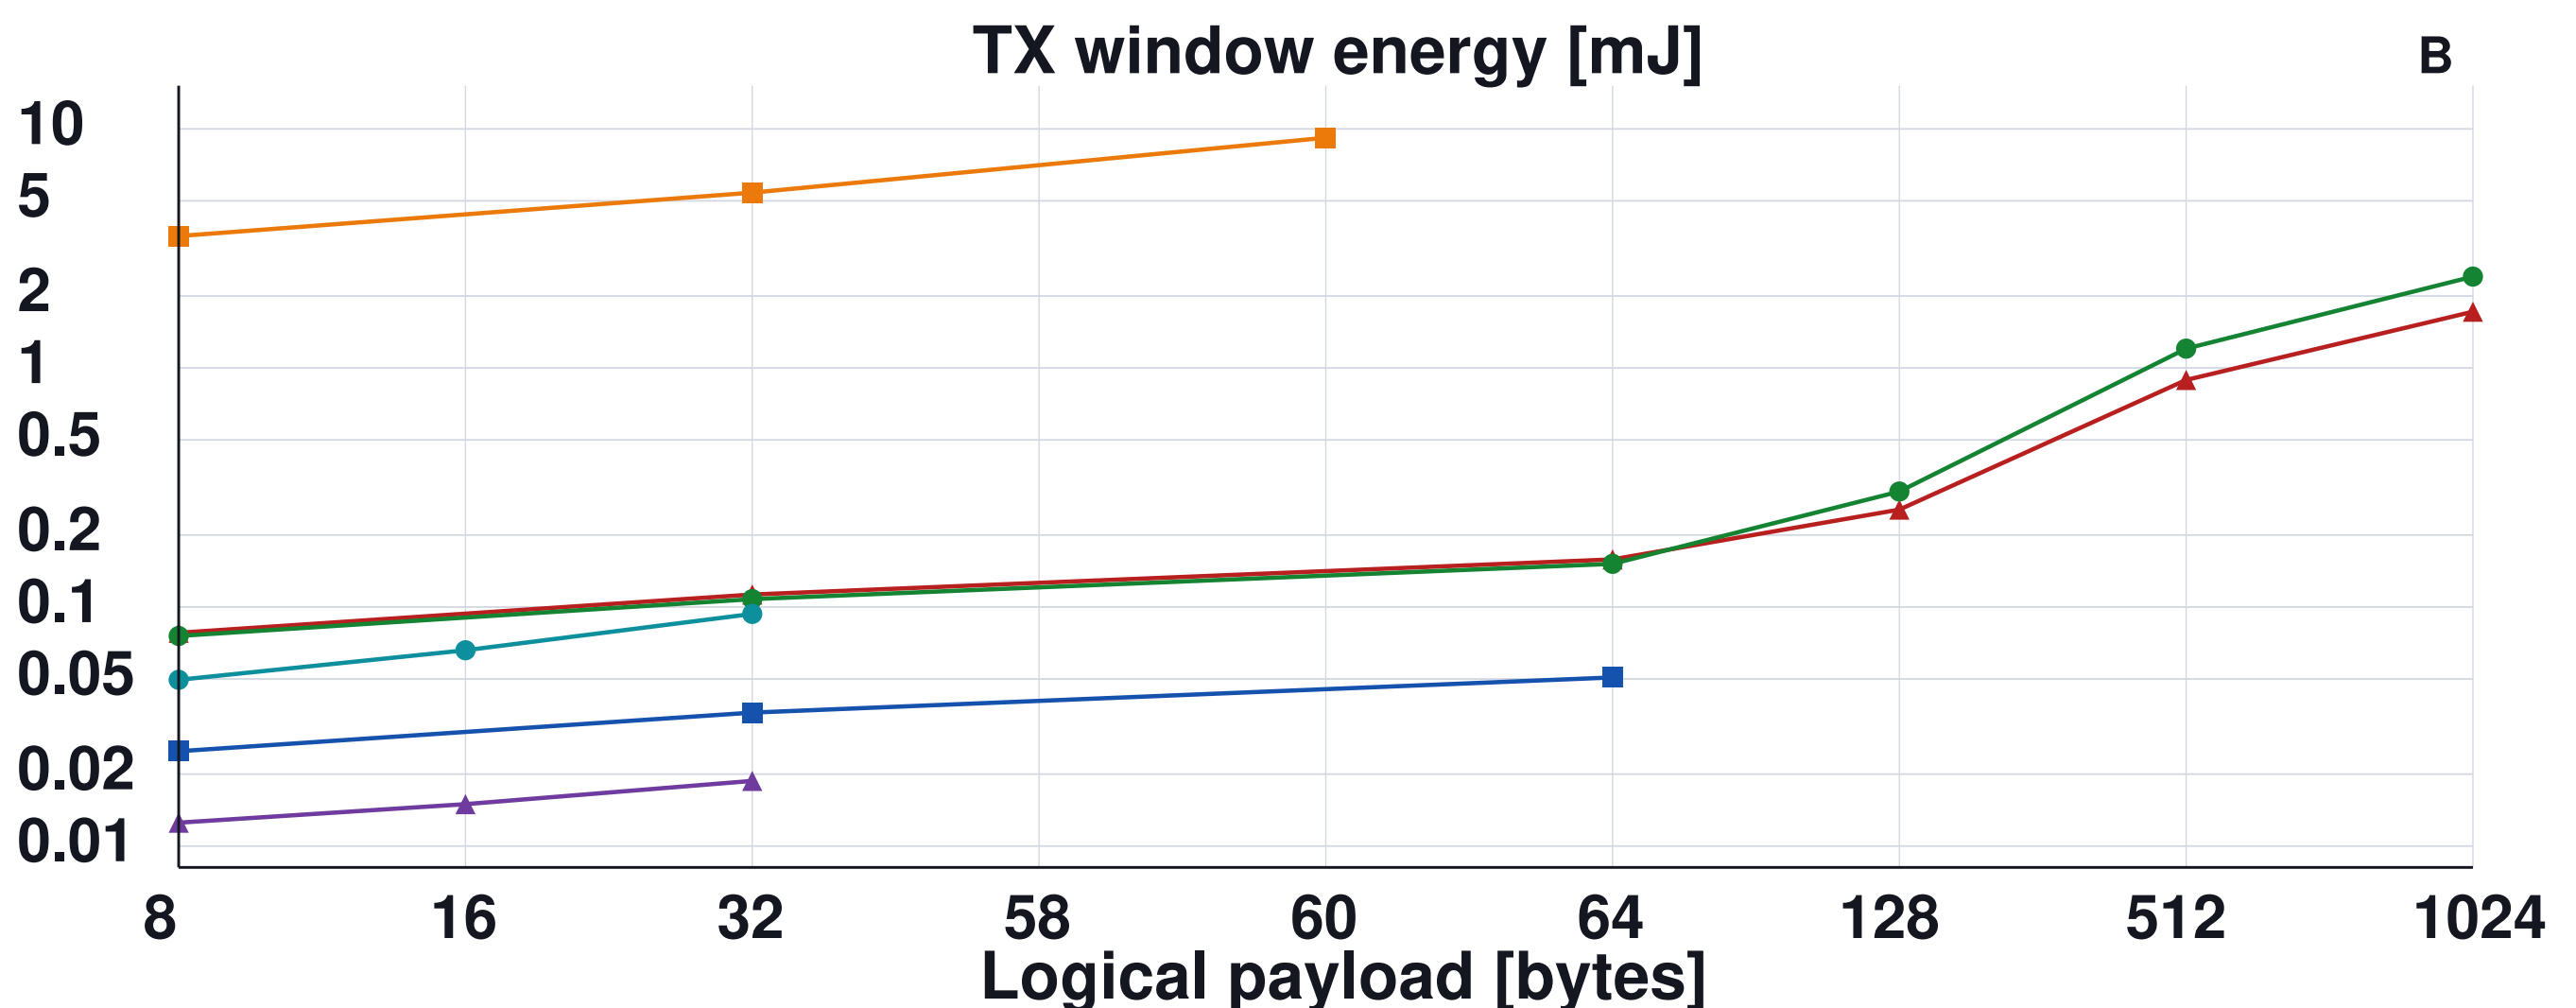

* CH9340C TX above 64 B: historical window only; full-transfer energy awaits new measurements.