


SX1278 physical-implementation comparison (continued)

Matched 60 s workload: 32-byte frames, SF9/BW125, 15 ms host gap, 3.3 V




TX mean power above standby [mW]

C

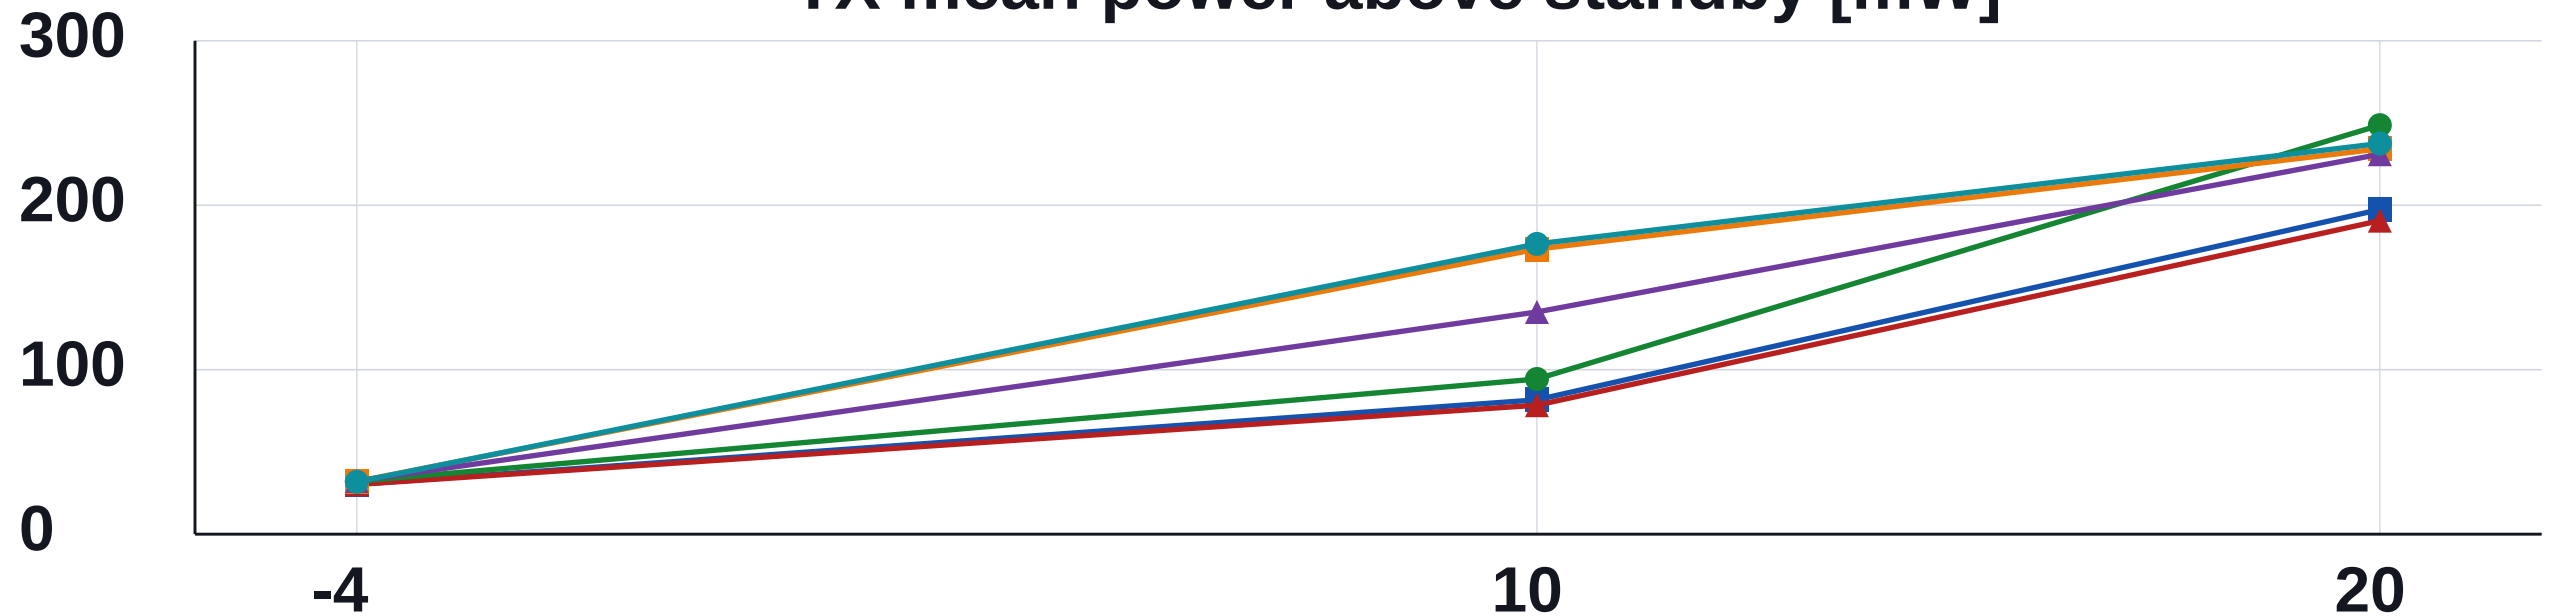

RX mean power above standby [mW]

D

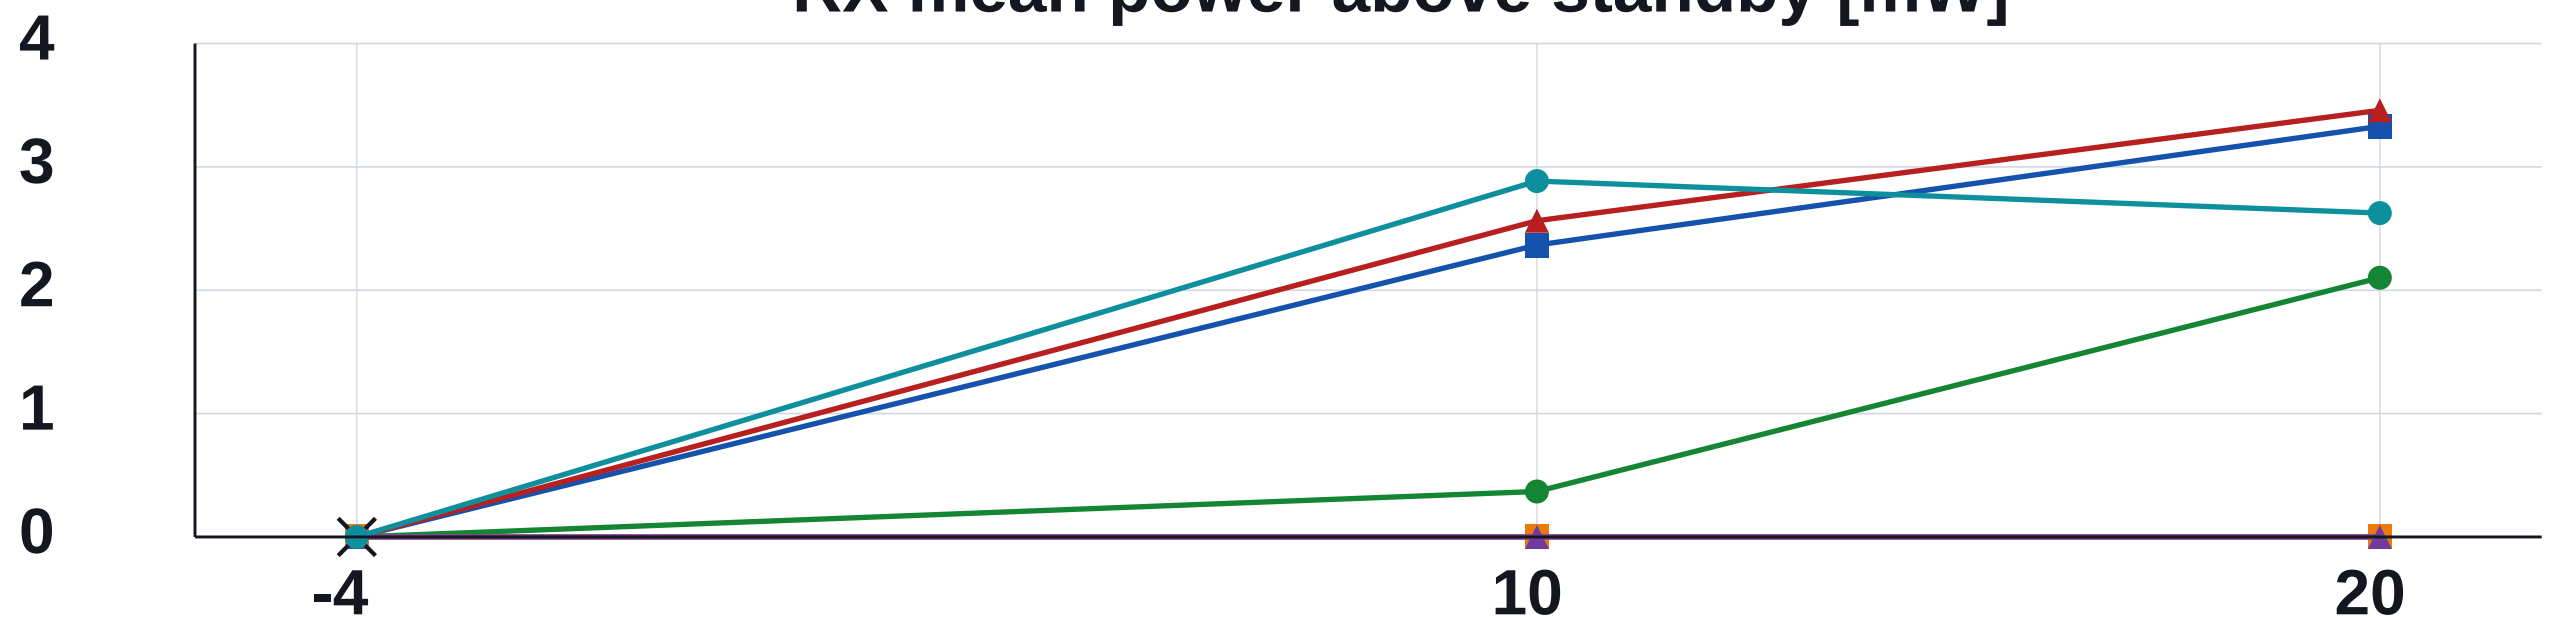

Configured RF power [dBm]