

TX energy versus measured logical payload size (continued)


Fastest tested mode and highest tested configured power per module; logarithmic energy axis

Direct LoRa and modem implementations

- Ai-Thinker RA-01H
- Ai-Thinker RA-08
- ▲ Ebyte E22-400M30S
- XL1276-D01
- ▲ Ai-Thinker RA-01SH
- Ai-Thinker RA-09
- Ebyte E28

TX packet energy [mJ]

C

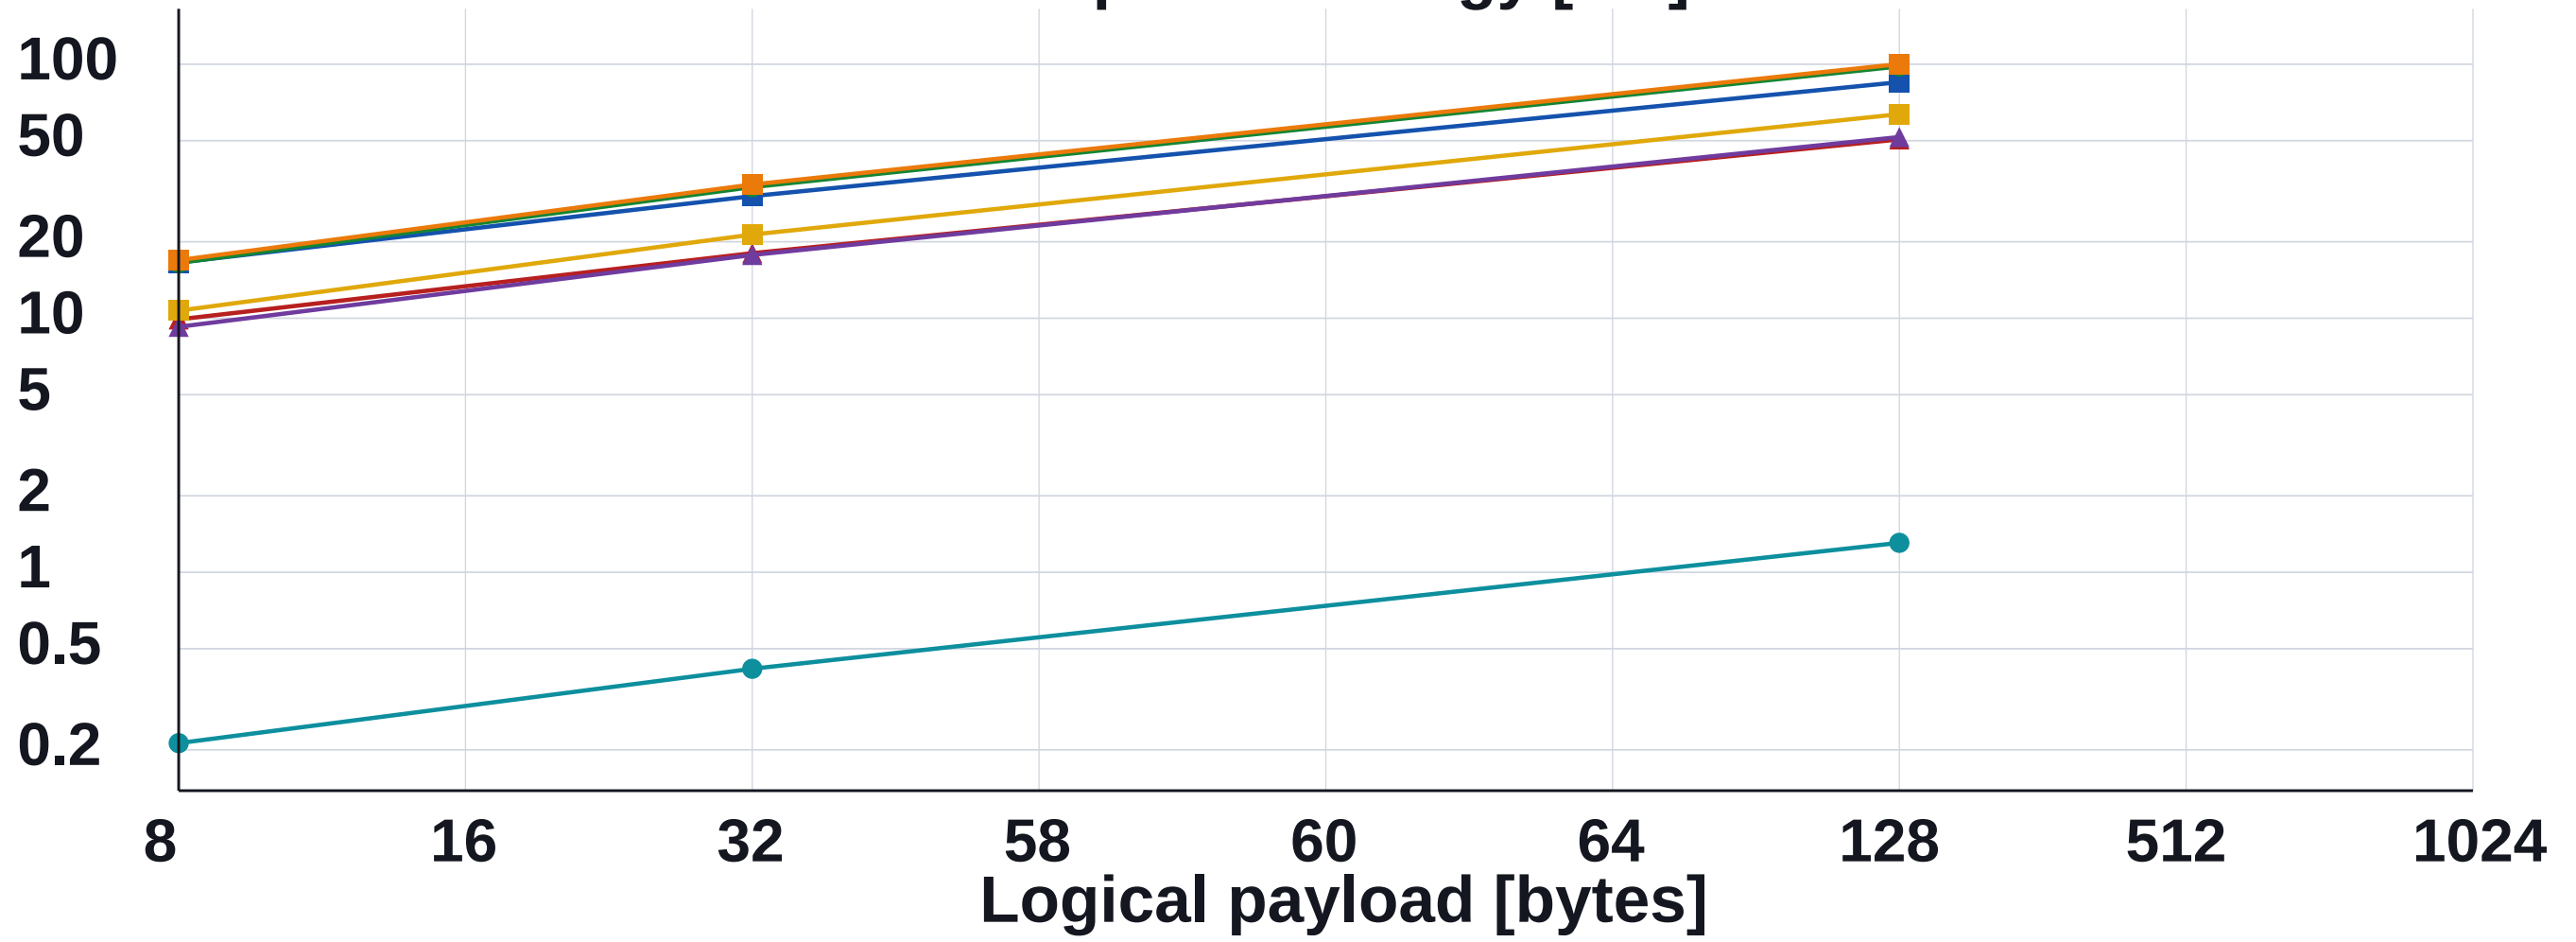

SX1278 physical variants

- Adafruit level-shifter board
- RA-02 + 2 capacitors
- ▲ Shielded radio module
- ▲ Ai-Thinker RA-02
- Carrier PCB + 2 capacitors
- Unshielded radio module

TX packet energy [mJ]

D

