
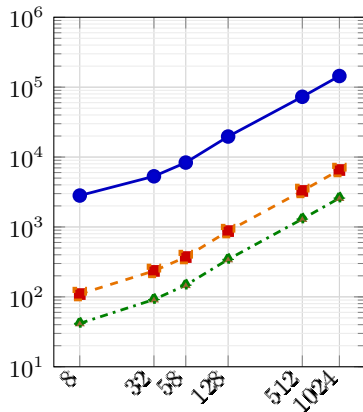
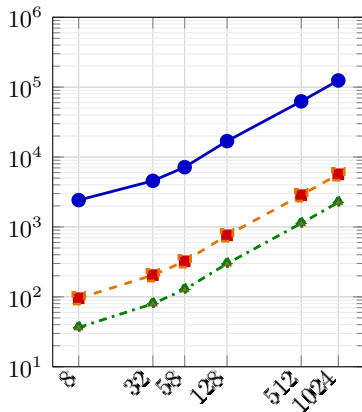


Ebyte E32-868T30D UART: energy versus logical payload

$P_{TX} = 21$ dBm

$P_{TX} = 27$ dBm

$P_{TX} = 30$ dBm

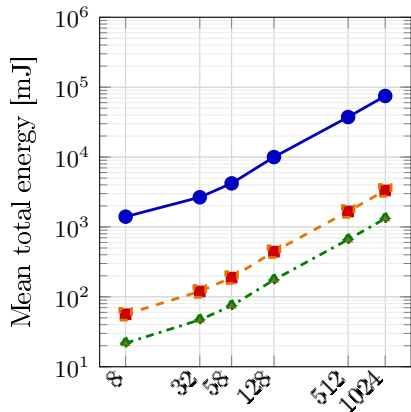

Logical transfer size [B]

Logical transfer size [B]

Logical transfer size [B]

—●— 0,3 kbps —■— 4,8 kbps —▲— 19,2 kbps

Mean of 5 repetitions; error bars show standard deviation. Logical transfers above 58 B are fragmented into physical frames of at most 58 B; both axes are logarithmic.