
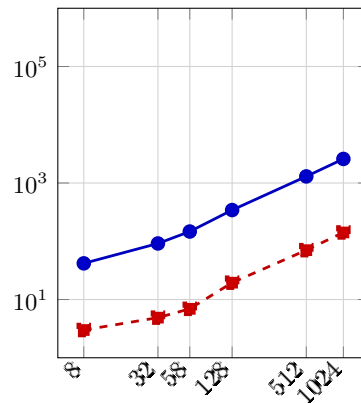
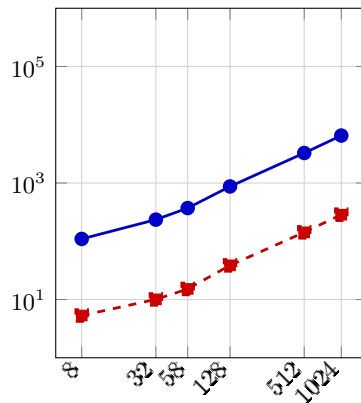


Ebyte E32-868T30D UART: TX–RX comparison

0,3 kbps

4,8 kbps

19,2 kbps

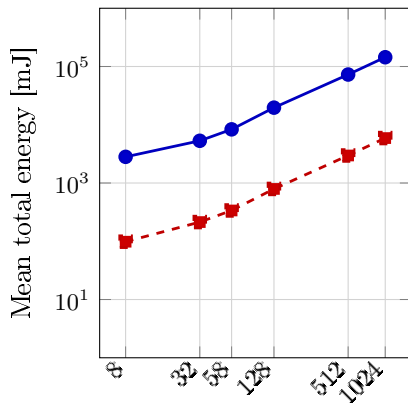

Logical transfer size [B]

Logical transfer size [B]

Logical transfer size [B]

—●— TX at 30 dBm - -■- RX, stimulus at 30 dBm

Mean of 5 repetitions; error bars show standard deviation. RX energy includes receiver activation, reception, and processing of all physical frames.