
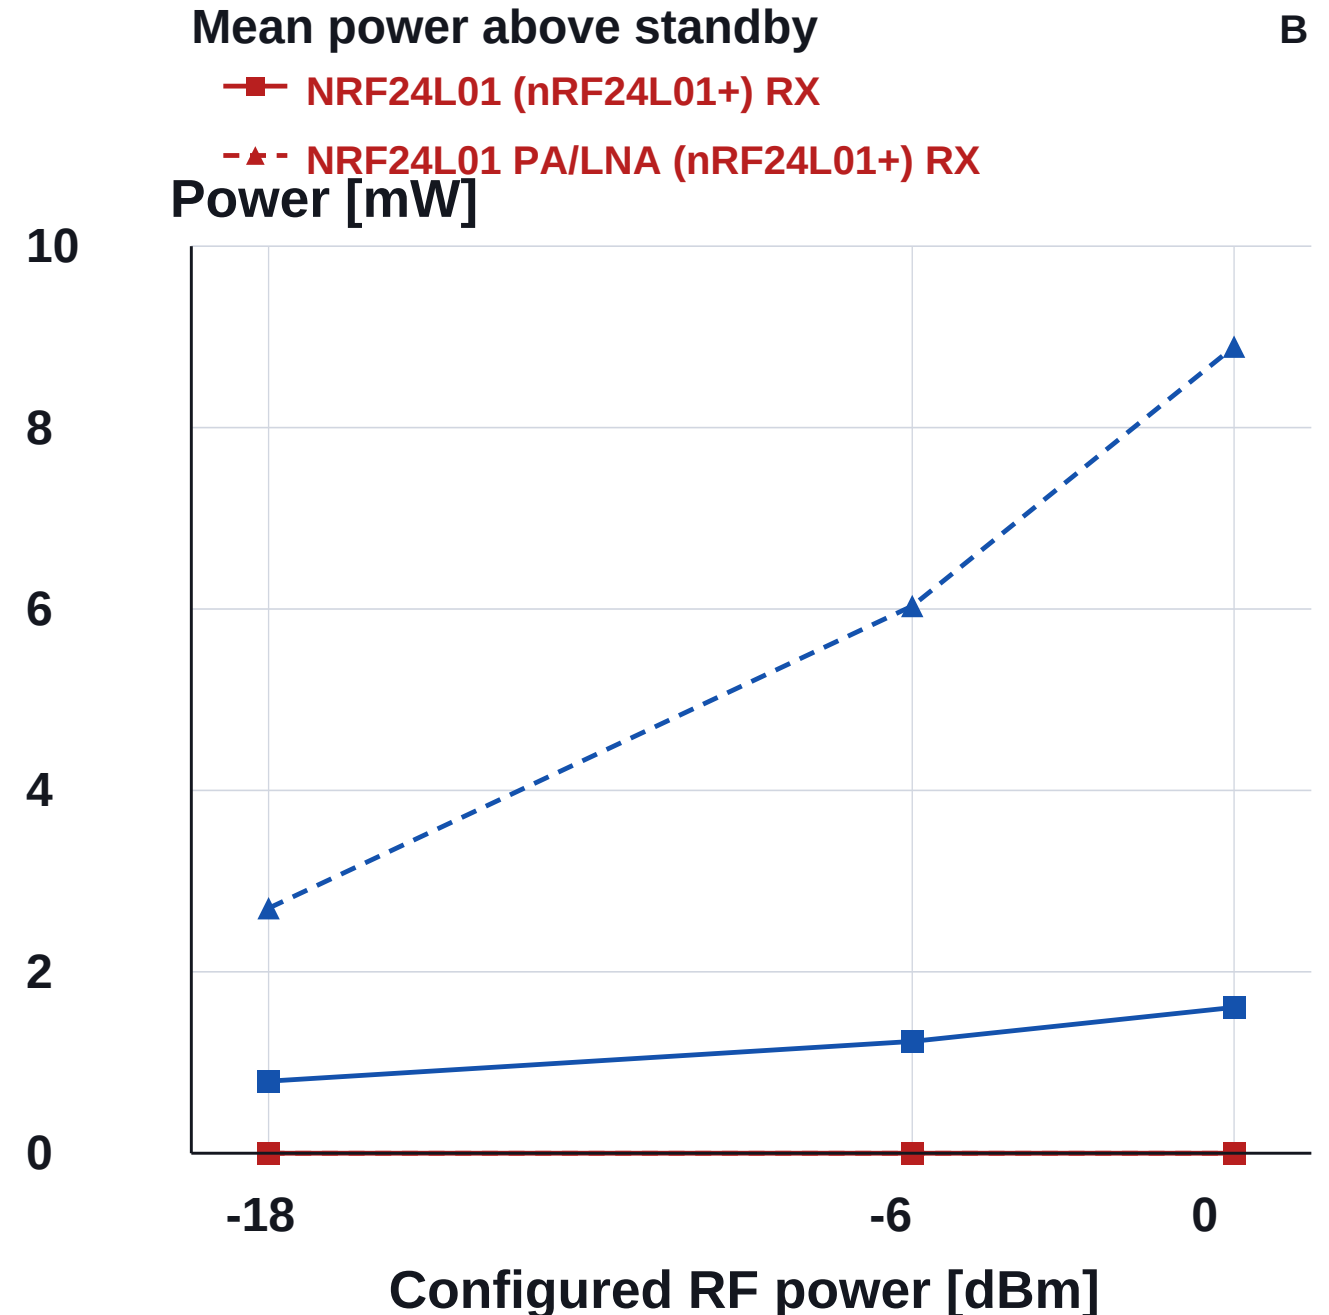


NRF24L01 versus NRF24L01 PA/LNA

Matched 60 s workload: 32-byte frames, 1 Mbps, 15 ms host gap, 3.3 V

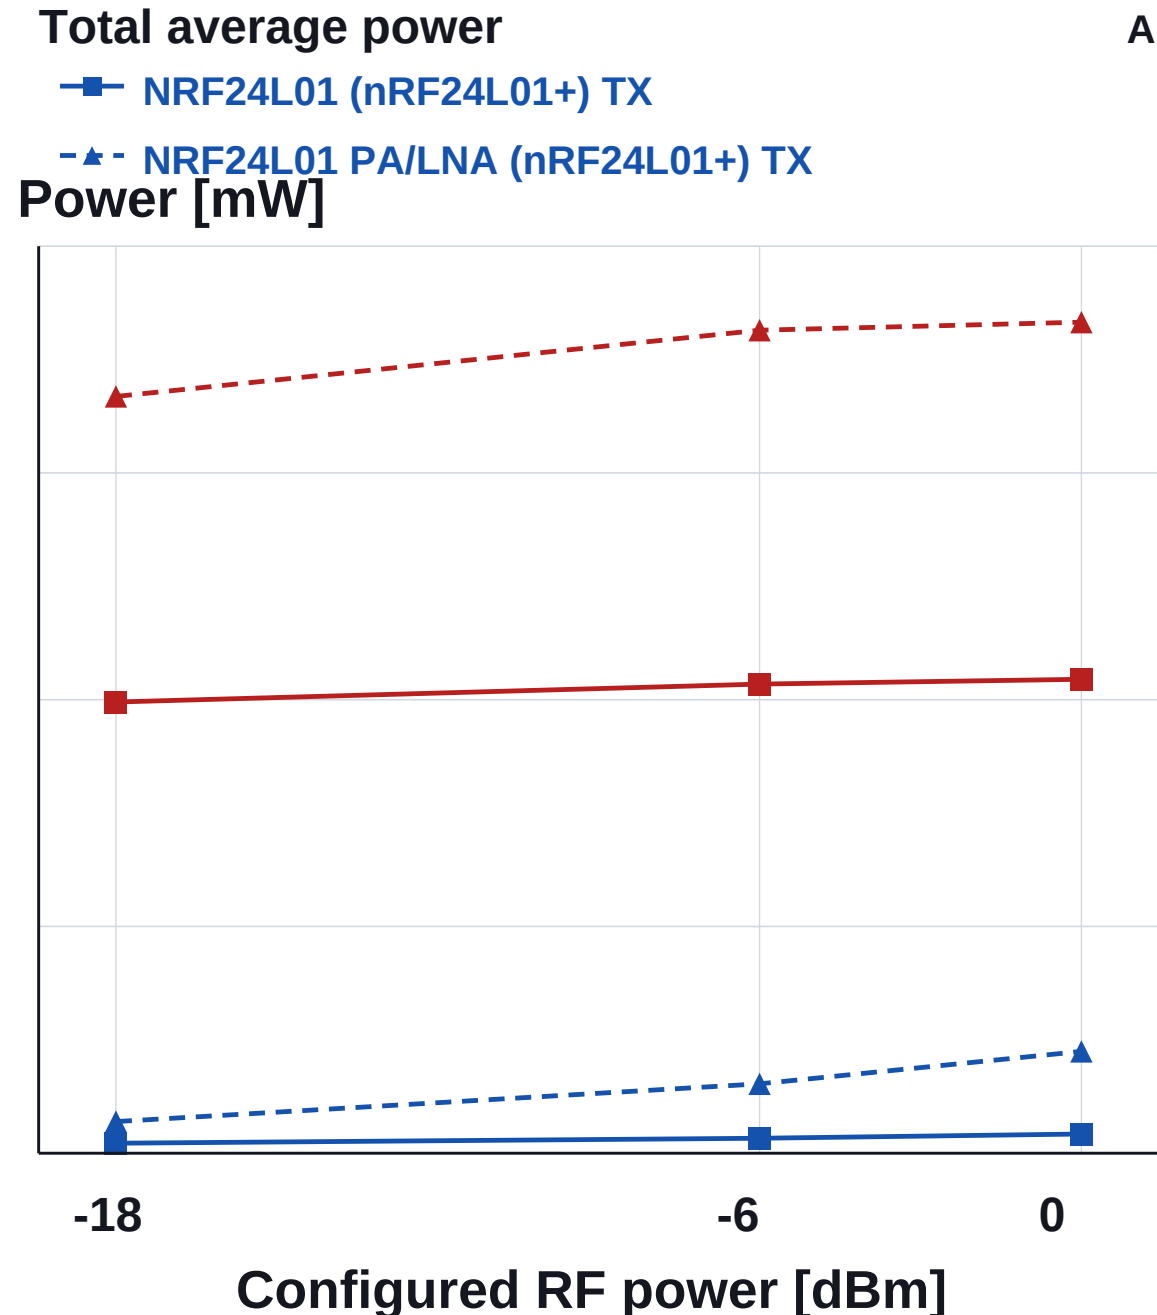

Each point is a 60 s mean at 3.3 V; the excess metric is clipped at zero by the campaign pipeline.