
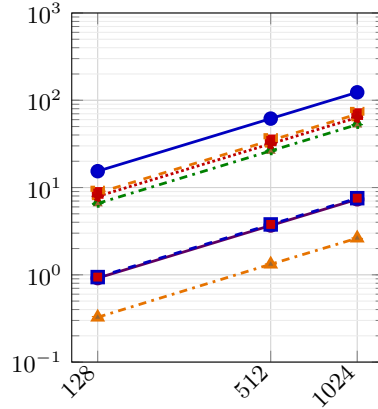
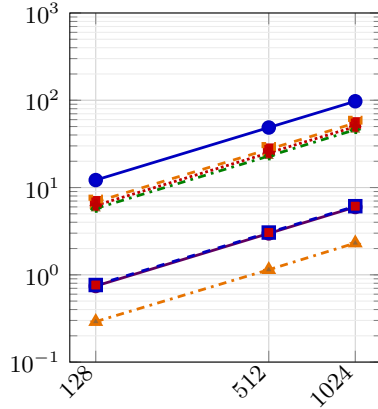


Ebyte E79-400DM2005S via CH340 (CC1352P): TX frame-window energy

$P_{TX} = -20$ dBm

$P_{TX} = 0$ dBm

$P_{TX} = 13$ dBm

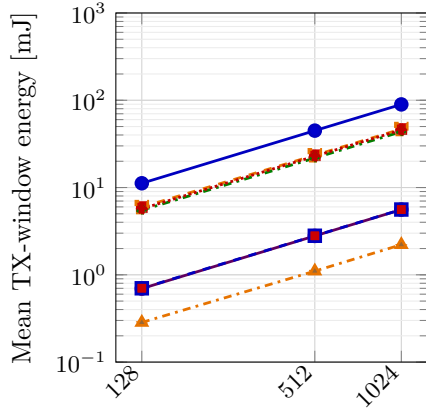

—●— SLR2K5 (2.5 kbps) —■— GFSK4K8 (4.8 kbps) —◆— OOK4K8 (4.8 kbps) —♦— SLR5 (5 kbps) —●— GFSK50 (50 kbps) —■— IEEE154G50 (50 kbps) —▲— GFSK200 (200 kbps)

All five attempts retained, including RF losses; host gaps excluded. Mean of 5 repetitions; error bars show standard deviation. Logical transfers above 64 B are fragmented into physical frames of at most 64 B; both axes are logarithmic.