


E28 direct SPI (SX1280): loss versus effective payload speed

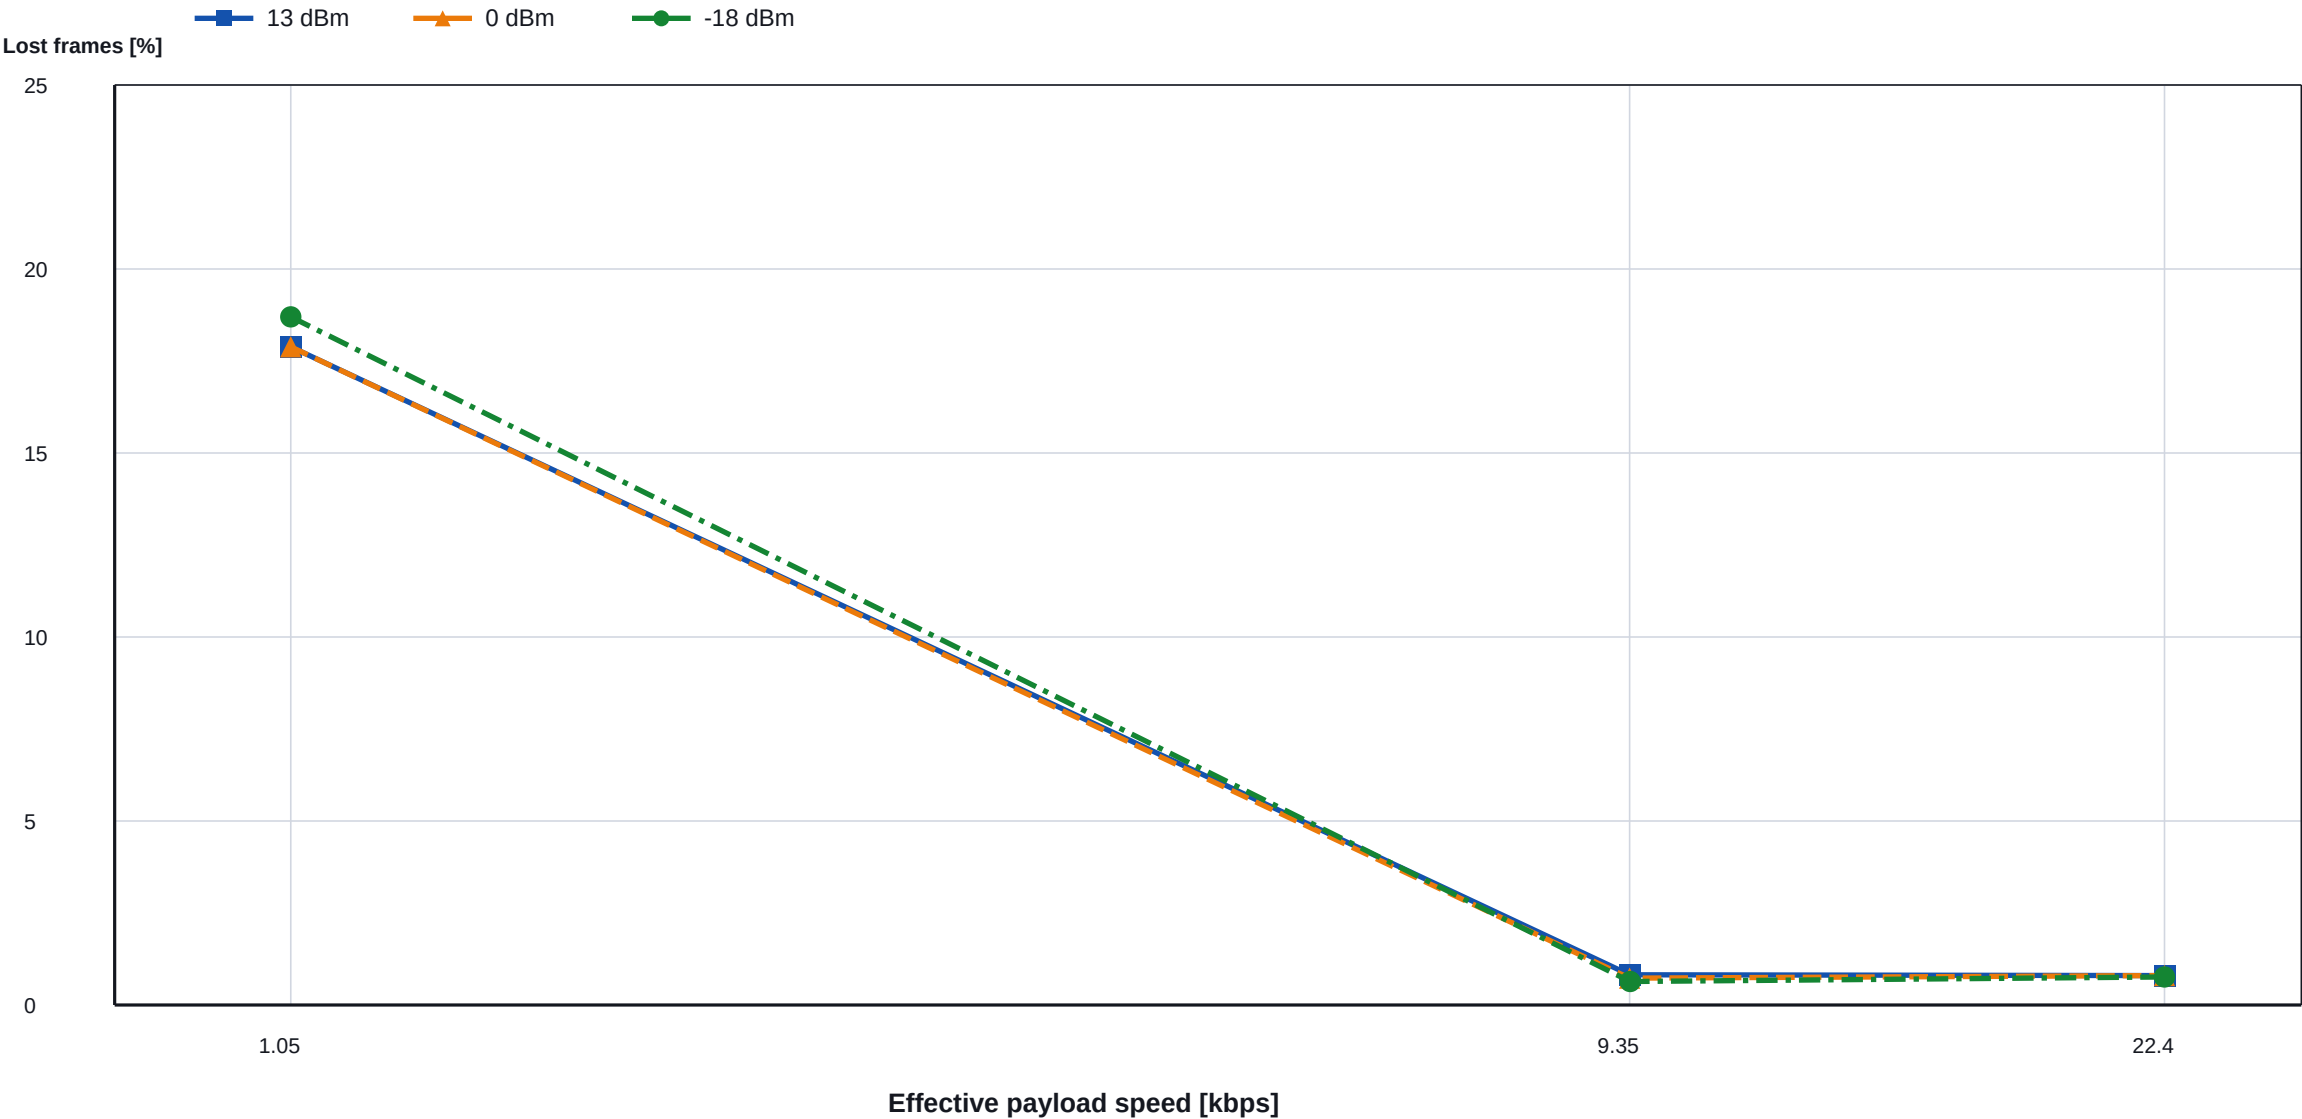

60 s per point; 64 B frames; 15 ms host gap