SHORT CIRCUIT PROTECTION:

• FUSED AT OUTPUT CURRENT OF 12A

OVERLOAD PROTECTION:


• AUTOMATIC CURRENT LIMIT USING CURRENT SENSING RESISTOR

EFFICIENCY:

(TESTED LOADS)

LOAD Ω	EFFICIENCY
1.05	51.397%
2	47.323%
3.34	46.829%
4.4	45.655%
5.57	44.584%
6.6	43.887%

LINEAR POWER SUPPLY CASE:

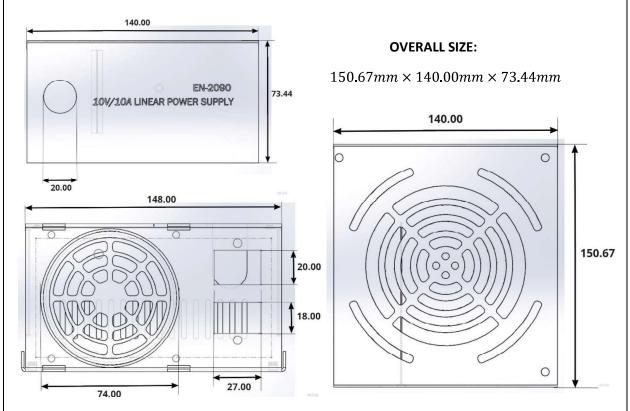

ALL THE MEASUREMENTS IN THE DIAGRAM ARE IN MILIMETER SCALE