

QEMU (Win-1) QEMU (Win-2)

Microsoft Windows XP [Version 5.1.2600]
(C) Copyright 1985-2001 Microsoft Corp.

C:\Documents and Settings\User>ping 10.0.0.10

Pinging 10.0.0.10 with 32 bytes of data:

Reply from 10.0.0.10: bytes=32 time=1ms TTL=255
Reply from 10.0.0.10: bytes=32 time=1ms TTL=255
Reply from 10.0.0.10: bytes=32 time=1ms TTL=255
Reply from 10.0.0.10: bytes=32 time=1ms TTL=255

Ping statistics for 10.0.0.10:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\Documents and Settings\User>ping 40.0.0.10

Pinging 40.0.0.10 with 32 bytes of data:

Reply from 40.0.0.10: bytes=32 time=2ms TTL=125
Reply from 40.0.0.10: bytes=32 time=2ms TTL=125
Reply from 40.0.0.10: bytes=32 time=2ms TTL=125
Reply from 40.0.0.10: bytes=32 time=2ms TTL=125

Ping statistics for 40.0.0.10:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 2ms, Maximum = 2ms, Average = 2ms

C:\Documents and Settings\User>

R1

R1(config)#do show ip int brief

Interface	IP-Address	OK?	Method	Status
Loopback0	10.0.0.1	YES	manual	up
Ethernet0/0	10.0.0.1	YES	manual	up
Ethernet0/1	20.0.0.1	YES	manual	up
Ethernet0/2	unassigned	YES	TFTP	down
Ethernet0/3	unassigned	YES	TFTP	down

R1(config)#
R1(config)#
R1(config)#
R1(config)#ping 10.0.0.10

% Invalid input detected at '^' marker.

R1(config)#do ping 10.0.0.10

Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 10.0.0.10, timeout is 2 seconds:
.....
Success rate is 0 percent (0/5)

R1(config)#

R2

R2(config)#do sh ip int brief

Interface	IP-Address	OK?	Method	Status
Loopback0	20.0.0.2	YES	manual	up
Ethernet0/0	20.0.0.2	YES	manual	up
Ethernet0/1	30.0.0.1	YES	manual	up
Ethernet0/2	unassigned	YES	TFTP	down
Ethernet0/3	unassigned	YES	TFTP	down

R2(config)#


R3

R3(config-if)#
R3(config-if)#
R3(config-if)#
R3(config-if)#do sh ip int brief

Interface	IP-Address	OK?	Method	Status
Ethernet0/0	40.0.0.1	YES	manual	up
Ethernet0/1	30.0.0.2	YES	manual	up
Ethernet0/2	unassigned	YES	TFTP	down
Ethernet0/3	unassigned	YES	TFTP	down

R3(config-if)#

Physical 01:00:00 START

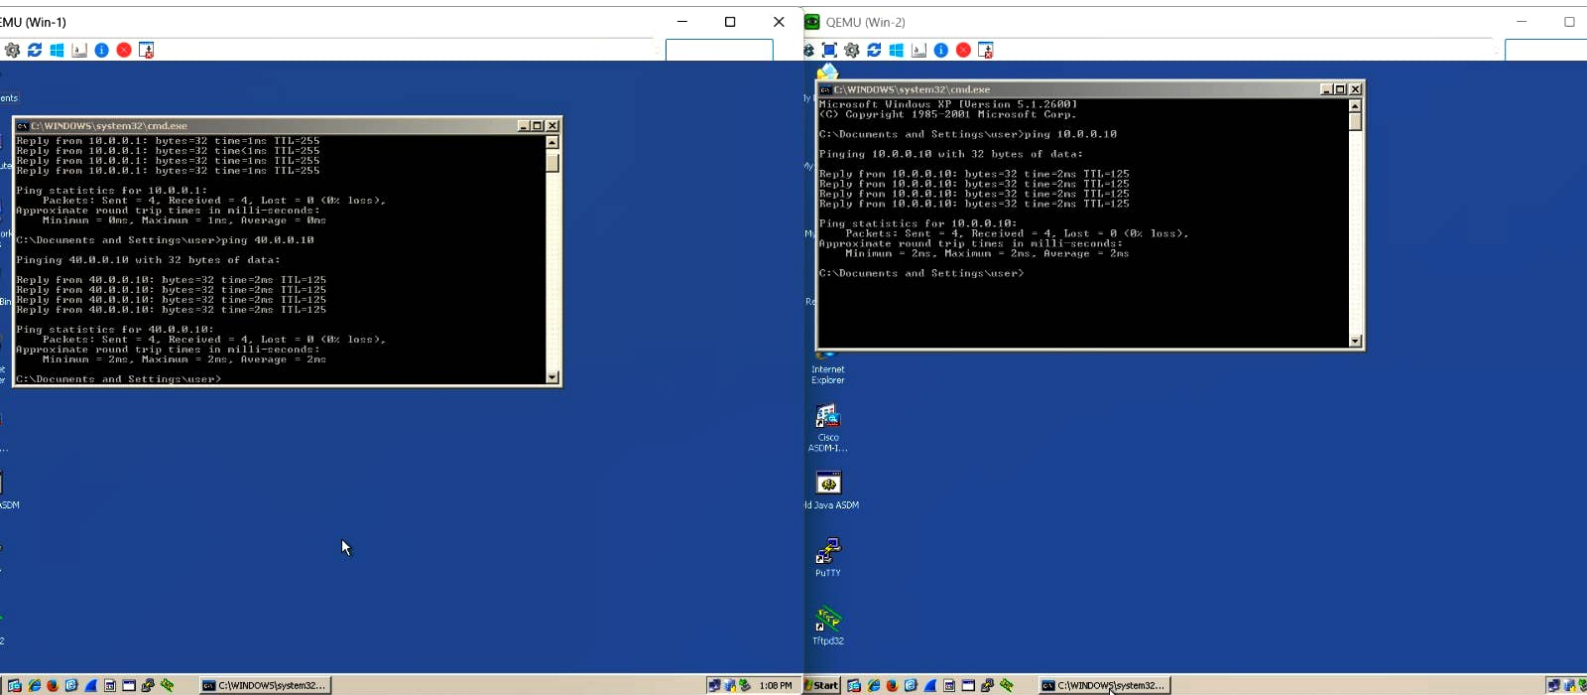

```
R1
R1(config)#do show ip int brief
Interface      IP-Address      OK? Method Status  Prot
GigabitEthernet0/0      10.0.0.1        YES manual up       up
GigabitEthernet0/1      20.0.0.1        YES manual up       up
GigabitEthernet0/2      unassigned      YES TFTP  down    down
GigabitEthernet0/3      unassigned      YES TFTP  down    down

R1(config)#
R1(config)#
R1(config)#
R1(config)#ping 10.0.0.10
^
% Invalid input detected at '^' marker.

R1(config)#do ping 10.0.0.10
Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 10.0.0.10, timeout is 2 seconds:
.....
Success rate is 0 percent (0/5)

R2
+ - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

R2(config)#do sh ip int brief
Interface      IP-Address      OK? Method Status  Prot
GigabitEthernet0/0      20.0.0.2        YES manual up       up
GigabitEthernet0/1      30.0.0.1        YES manual up       up
GigabitEthernet0/2      unassigned      YES TFTP  down    down
GigabitEthernet0/3      unassigned      YES TFTP  down    down

R2(config)#
```

```
R3
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
a - application route
+ - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

R3(config-if)#
R3(config-if)#
R3(config-if)#do sh ip int brief
Interface      IP-Address      OK? Method Status  Protocol
GigabitEthernet0/0      40.0.0.1        YES manual up       up
GigabitEthernet0/1      30.0.0.2        YES manual up       up
GigabitEthernet0/2      unassigned      YES TFTP  down    down
GigabitEthernet0/3      unassigned      YES TFTP  down    down

R3(config-if)#
```