


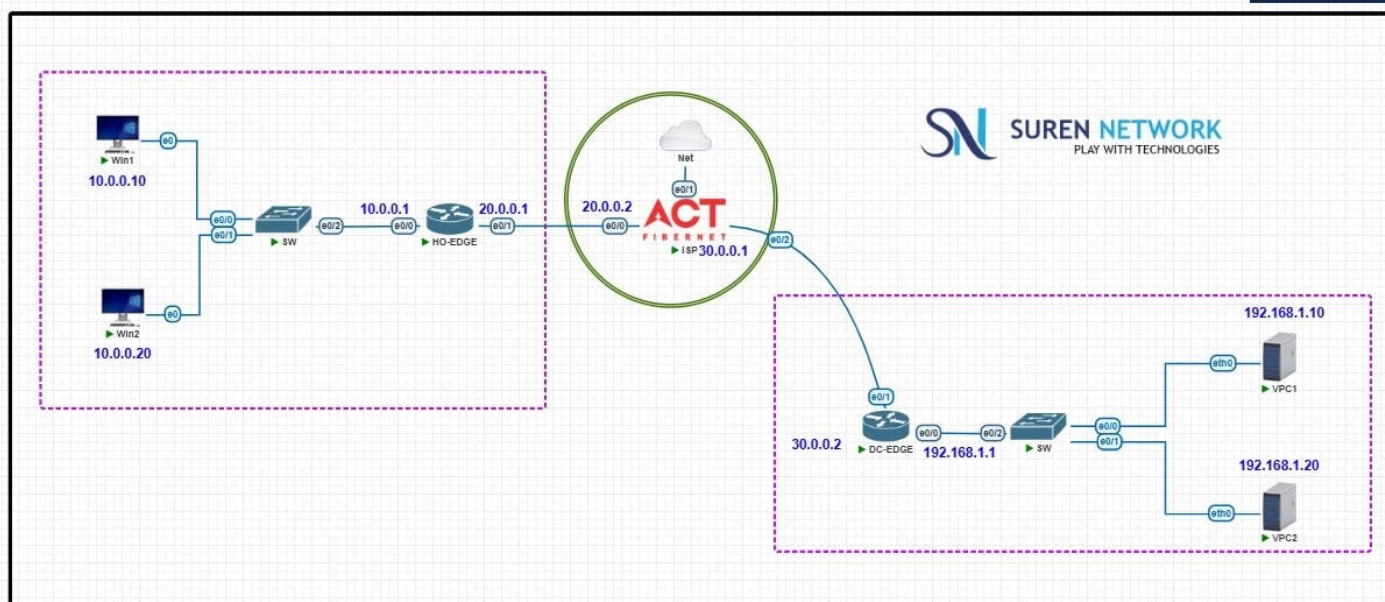

PNETLab | Topology x (1) WhatsApp x Home - Google Drive x vigneshrvs9514-ctrl/CC x New Tab x Ask Gemini

labs.surennetwork.com/legacy/topology

Gmail YouTube Maps News Translate

Terminal

HO-EDGE x Win1 x Win2 x

Win1: 10.0.0.10

Win2: 10.0.0.20

SW: 10.0.0.1

HO-EDGE: 20.0.0.1

Instagram


from Meta


Firefox automatically sends some data to Mozilla so that we can improve your experience.

Start C:\WINDOWS\system32... Network Connections 4 Firefox

10:38 14-09-2026

The screenshot shows a PNETLab interface with a topology diagram on the left and a terminal window on the right. The topology diagram illustrates a network setup with two hosts, Win1 (10.0.0.10) and Win2 (10.0.0.20), connected to a switch (SW) at 10.0.0.1. The switch is connected to a host (HO-EDGE) at 20.0.0.1. The terminal window shows a web browser displaying the Instagram logo, indicating a successful connection to the internet.

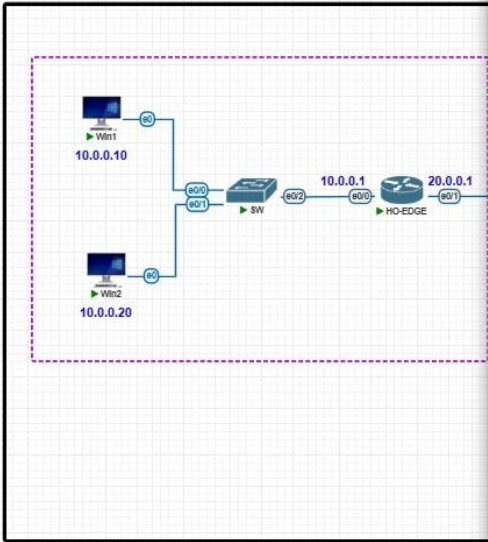

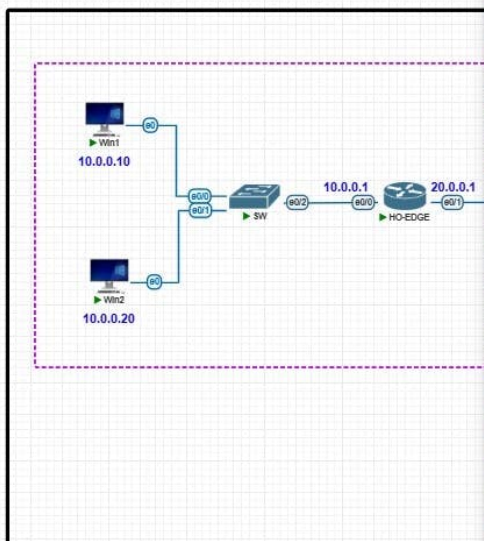

```
Terminal
HO-EDGE x Win1 x Win2 x
HO-EDGE(config)#
HO-EDGE(config)#int e0/0
HO-EDGE(config-if)#ip nat inside
HO-EDGE(config-if)#int e
*Sep 14 05:03:04.310: %LINEPROTO-5-UPDOWN: Line protocol on Interface NVI0, changed st
te to up
HO-EDGE(config-if)#int e0/1
HO-EDGE(config-if)#ip nat outside
HO-EDGE(config-if)#access-list 1 permit 10.0.0.0 0.255.255.255
HO-EDGE(config)#do sh access-list
Standard IP access list 1
  10 permit 10.0.0.0, wildcard bits 0.255.255.255
HO-EDGE(config)#
HO-EDGE(config)#
HO-EDGE(config)#int e0/1
HO-EDGE(config-if)#no access-list 1 permit 10.0.0.0 0.255.255.255
HO-EDGE(config)#do sh access-list
Standard IP access list 1
  10 permit 10.0.0.0, wildcard bits 0.255.255.255
HO-EDGE(config)#
HO-EDGE(config)#
HO-EDGE(config)#access-list 1 permit 10.0.0.0 0.255.255.255
HO-EDGE(config)#do sh access-list
Standard IP access list 1
  10 permit 10.0.0.0, wildcard bits 0.255.255.255
HO-EDGE(config)#
HO-EDGE(config)#ip nat inside source list 1 int e0/1 overload
HO-EDGE(config)#
```

PNETLab | Topology x (1) WhatsApp x Home - Google Drive x vigneshrvs9514-ctrl/CC x New Tab x Ask Gemini x

labs.surennetwork.com/legacy/topology

Notifications

Terminal

HO-EDGE x Win1 x Win2 x VPC1 x VPC2 x DC-EDGE x

VPC2> ip 192.168.1.20/24 192.168.1.1
Checking for duplicate address...
VPC2 : 192.168.1.20 255.255.255.0 gateway 192.168.1.1

VPC2> show ip

```
NAME          : VPC2[1]
IP/MASK        : 192.168.1.20/24
GATEWAY        : 192.168.1.1
DNS            :
MAC            : 00:50:79:66:68:73
LPORT         : 20000
RHOST:PORT     : 127.0.0.1:30000
MTU            : 1500
```

VPC2> █

10.0.0.10 Win1
10.0.0.20 Win2

192.168.1.10 VPC1
192.168.1.20 VPC2

NAT

01 : 00 : 00 START

ENG IN 12:03 14-09-2026

Win1
10.0.0.10

Win2
10.0.0.20

VPC1
192.168.1.10

VPC2
192.168.1.20

HO-EDGE x Win1 x Win2 x VPC1 x VPC2 x DC-EDGE x

ping HOST [OPTION ...] Ping HOST with ICMP (default) or TCP/UDP. See ping ?
quit Quit program
relay ARG ... Configure packet relay between UDP ports. See relay ?
rlogin [ip] port Telnet to port on host at ip (relative to host PC)
save [FILENAME] Save the configuration to the file FILENAME
set ARG ... Set VPC name and other options. Try set ?
show [ARG ...] Print the information of VPCs (default). See show ?
sleep [seconds] [TEXT] Print TEXT and pause running script for seconds
trace HOST [OPTION ...] Print the path packets take to network HOST
version Shortcut for: show version

To get command syntax help, please enter '?' as an argument of the command.
VPC1> show ip

NAME : VPC1[1]
IP/MASK : 192.168.1.10/24
GATEWAY : 192.168.1.1
DNS :
MAC : 00:50:79:66:68:72
LPORT : 20000
RHOST:PORT : 127.0.0.1:30000
MTU : 1500
VPC1>

01 : 00 : 00

START

ENG IN

12:02 14-09-2026

Win1
10.0.0.10

Win2
10.0.0.20

DC-EDGE

HO-EDGE Win1 Win2 VPC1 VPC2

```
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
a - application route
+ - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is 30.0.0.1 to network 0.0.0.0

S*    0.0.0.0/0 [1/0] via 30.0.0.1
DC-EDGE(config)#
DC-EDGE(config)#
DC-EDGE(config)#
DC-EDGE(config)#
DC-EDGE(config)#ip nat inside source static 192.168.1.10 30.0.0.10
DC-EDGE(config)#ip nat inside source static 192.168.1.20 30.0.0.11
DC-EDGE(config)#
*Sep 14 06:29:25.669: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)
DC-EDGE(config)#
DC-EDGE(config)#
DC-EDGE(config)#do wr
Building configuration...
[OK]
DC-EDGE(config)#
```

VPC1
192.168.1.10

VPC2
192.168.1.20

NAT

01 : 00 : 00 START

ENG IN

12:02 14-09-2026

PNETLab | Topology x (1) WhatsApp x Home - Google Drive x vigneshrvs9514-ctrl/CC x New Tab x Ask Gemini x

labs.surennetwork.com/legacy/topology

Notifications

Terminal

HO-EDGE x Win1 x Win2 x VPC1 x VPC2 x DC-EDGE x

10.0.0.10

10.0.0.20

192.168.1.10

192.168.1.20

VPC1

VPC2

```
C:\WINDOWS\system32\cmd.exe
C:\Documents and Settings\user>ping 30.0.0.10
Pinging 30.0.0.10 with 32 bytes of data:
Request timed out.

Ping statistics for 30.0.0.10:
    Packets: Sent = 1, Received = 0, Lost = 1 (100% loss),
    Control-C
C:\Documents and Settings\user>ping 30.0.0.11
Pinging 30.0.0.11 with 32 bytes of data:
Reply from 30.0.0.11: bytes=32 time=3ms TTL=61
Reply from 30.0.0.11: bytes=32 time=3ms TTL=61
Reply from 30.0.0.11: bytes=32 time=2ms TTL=61
Reply from 30.0.0.11: bytes=32 time=5ms TTL=61

Ping statistics for 30.0.0.11:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 2ms, Maximum = 5ms, Average = 3ms
C:\Documents and Settings\user>
```

from Meta

Firefox automatically sends some data to Meta so that we can improve your experience.

Start C:\WINDOWS\system32\cmd.exe Network Connections 4 Firefox 11:35 PM

01 : 00 : 00 START

ENG IN 12:05 14-09-2026

PNETLab | Topology x (1) WhatsApp x Home - Google Drive x vighneshv9514-ctrl/CC x New Tab x Ask Gemini

labs.surennetwork.com/legacy/topology

Notifications

Terminal

HO-EDGE x Win1 x Win2 x VPC1 x VPC2 x DC-EDGE x

10.0.0.10

10.0.0.20

192.168.1.10

192.168.1.20


VPC1

VPC2

```
C:\WINDOWS\system32\cmd.exe
ping statistics for 30.0.0.10:
  Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),
C:\Documents and Settings\user>ping 30.0.0.10
Pinging 30.0.0.10 with 32 bytes of data:
Control-C
AC
C:\Documents and Settings\user>ping 30.0.0.11
Pinging 30.0.0.11 with 32 bytes of data:
Reply from 30.0.0.11: bytes=32 time=4ms TTL=61
Reply from 30.0.0.11: bytes=32 time=3ms TTL=61
Reply from 30.0.0.11: bytes=32 time=3ms TTL=61
Reply from 30.0.0.11: bytes=32 time=3ms TTL=61
Ping statistics for 30.0.0.11:
  Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
  Approximate round trip times in milli-seconds:
    Minimum = 3ms, Maximum = 4ms, Average = 3ms
C:\Documents and Settings\user>
```

01 : 00 : 00 START

12:02 14-09-2026

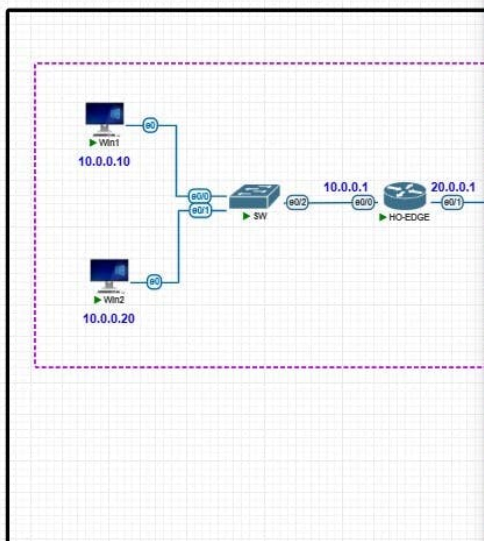

```
Terminal
HO-EDGE x Win1 x Win2 x
HO-EDGE(config)#
HO-EDGE(config)#int e0/0
HO-EDGE(config-if)#ip nat inside
HO-EDGE(config-if)#int e
*Sep 14 05:03:04.310: %LINEPROTO-5-UPDOWN: Line protocol on Interface NVI0, changed st
te to up
HO-EDGE(config-if)#int e0/1
HO-EDGE(config-if)#ip nat outside
HO-EDGE(config-if)#access-list 1 permit 10.0.0.0 0.255.255.255
HO-EDGE(config)#do sh access-list
Standard IP access list 1
    10 permit 10.0.0.0, wildcard bits 0.255.255.255
HO-EDGE(config)#
HO-EDGE(config)#
HO-EDGE(config)#int e0/1
HO-EDGE(config-if)#no access-list 1 permit 10.0.0.0 0.255.255.255
HO-EDGE(config)#do sh access-list
Standard IP access list 1
    10 permit 10.0.0.0, wildcard bits 0.255.255.255
HO-EDGE(config)#
HO-EDGE(config)#
HO-EDGE(config)#access-list 1 permit 10.0.0.0 0.255.255.255
HO-EDGE(config)#do sh access-list
Standard IP access list 1
    10 permit 10.0.0.0, wildcard bits 0.255.255.255
HO-EDGE(config)#
HO-EDGE(config)#ip nat inside source list 1 int e0/1 overload
HO-EDGE(config)#
```