


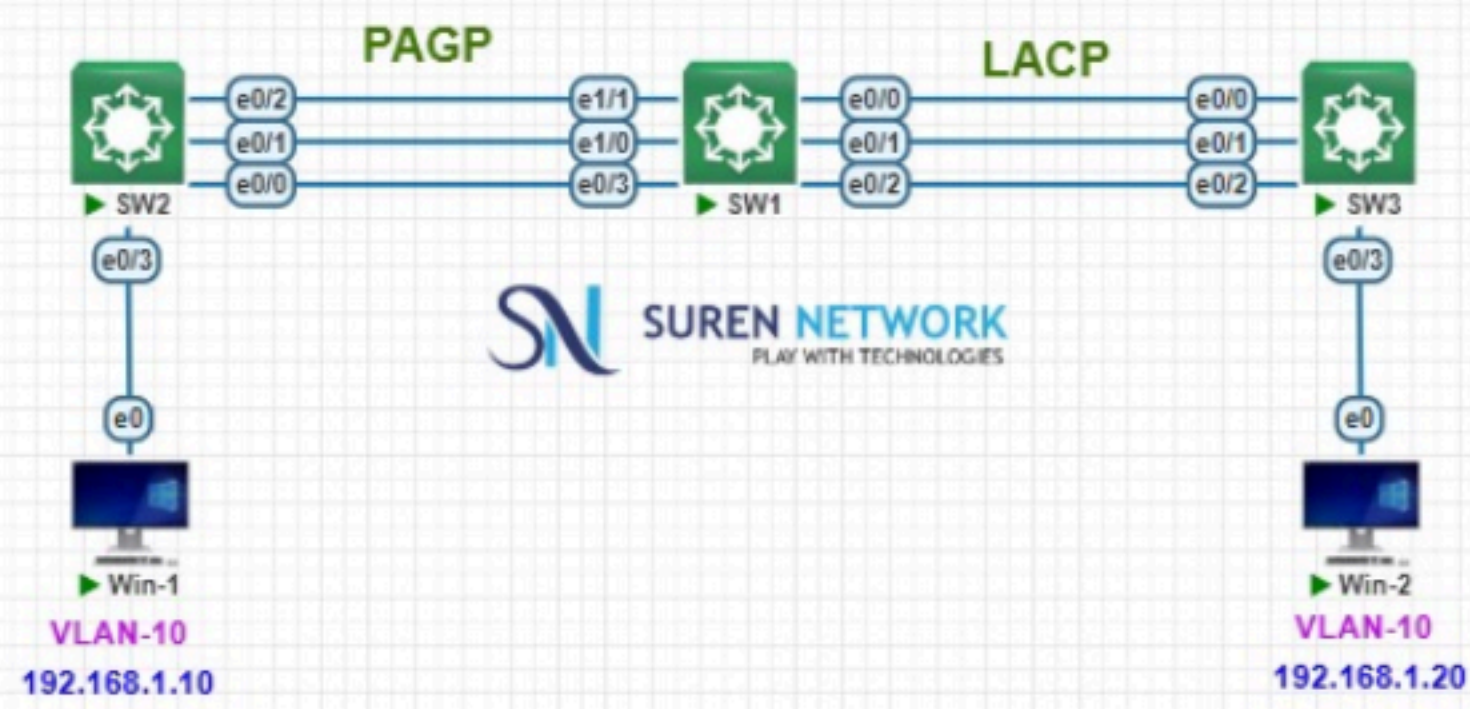

TERMINAL (5)

labs.surennetwork.com/legacy/topology

Terminal

Win-1 x Win-2 x SW2 x SW1 x

Interface	Role	Sts	Cost	Prio.Nbr	Type
Po1	Root	FWD	47	128.65	P2p
Po2	Desg	FWD	47	128.66	P2p

VLAN0010

Spanning tree enabled protocol ieee

Root ID

Priority 32778

Address aabb.cc00.0100

Cost 47

Port 65 (Port-channell)

Hello Time 2 sec Max Age 20 sec Forward Delay 15 sec

Bridge ID

Priority 32778 (priority 32768 sys-id-ext 10)

Address aabb.cc00.0300

Hello Time 2 sec Max Age 20 sec Forward Delay 15 sec

Aging Time 300 sec

Interface	Role	Sts	Cost	Prio.Nbr	Type
Po1	Root	FWD	47	128.65	P2p
Po2	Desg	FWD	47	128.66	P2p

SW1(config)#

SW2

e0/2

e0/1

e0/0

e0/3

e0

Win-1

VLAN-10

192.168.1.10

PAGP

SW1

e1/1

e1/0

e0/3

SN

SUREN

PLAY W

TERMINAL (4)

ENG

IN

15:36

21-09-2026

```
graph LR
    SW2[SW2] --- e0/2 --- e1/1[SW1]
    SW2 --- e0/1 --- e1/0[SW1]
    SW2 --- e0/0 --- e0/3[SW1]
    SW2 --- e0/3 --- e0[PC]
    e0 --- Win-1[Win-1]
    Win-1 --- VLAN-10[VLAN-10]
    VLAN-10 --- IP[192.168.1.10]
```

Terminal

Win-1 x Win-2 x SW2 x **SW1 x**

```
I - stand-alone s - suspended
H - Hot-standby (LACP only)
R - Layer3      S - Layer2
U - in use      N - not in use, no aggregation
f - failed to allocate aggregator

M - not in use, minimum links not met
m - not in use, port not aggregated due to minimum links not met
u - unsuitable for bundling
w - waiting to be aggregated
d - default port

A - formed by Auto LAG

Number of channel-groups in use: 2
Number of aggregators:          2

Group  Port-channel  Protocol    Ports
-----+-----+-----+-----
1      Po1(SU)          PAgP        Et0/3(P)   Et1/0(P)   Et1/1(P)
2      Po2(SU)          LACP        Et0/0(P)   Et0/1(P)   Et0/2(P)

SW1(config)#
SW1(config)#
SW1(config)#
SW1(config)#
```

labs.surrennetwork.com/legacy/topology

Ask Gemini

Terminal

Win-2 x SW2 x SW1 x SW3 x Win-1 x

C:\WINDOWS\system32\cmd.exe

Windows IP Configuration

Ethernet adapter Local Area Connection:

Connection-specific DNS Suffix . . . : 192.168.1.10

IP Address : 192.168.1.10

Subnet Mask : 255.255.255.0

Default Gateway : 192.168.1.1

C:\Documents and Settings\user>ping 192.168.1.20

Pinging 192.168.1.20 with 32 bytes of data:

Reply from 192.168.1.20: bytes=32 time=6ms TTL=128

Reply from 192.168.1.20: bytes=32 time=2ms TTL=128

Reply from 192.168.1.20: bytes=32 time=2ms TTL=128

Reply from 192.168.1.20: bytes=32 time=3ms TTL=128

Ping statistics for 192.168.1.20:

Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),

Approximate round trip times in milli-seconds:

Minimum = 2ms, Maximum = 6ms, Average = 3ms

C:\Documents and Settings\user>

Win-1

VLAN-10

192.168.1.10

SW2

SW1

SW3

PAGP


SN

TERMINAL (5)

ENG IN

15:37

21-09-2026

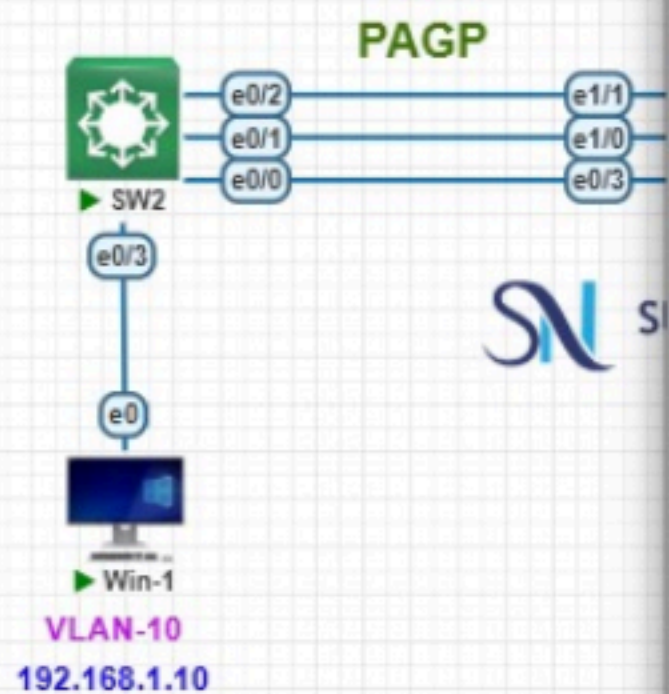

Win-2 x SW2 x SW1 x SW3 x Win-1 x

Aging Time 300 sec


Interface	Role	Sts	Cost	Prio.Nbr	Type
Et0/3	Desg	FWD	100	128.4	P2p
Po1	Desg	FWD	47	128.65	P2p

```
SW2(config)#
SW2(config)#
SW2(config)#
SW2(config)#do sh ip int br
```

Interface	IP-Address	OK?	Method	Status	Protocol
Ethernet0/0	unassigned	YES	unset	up	up
Ethernet0/1	unassigned	YES	unset	up	up
Ethernet0/2	unassigned	YES	unset	up	up
Ethernet0/3	unassigned	YES	unset	up	up
Ethernet1/0	unassigned	YES	unset	down	down
Ethernet1/1	unassigned	YES	unset	down	down
Ethernet1/2	unassigned	YES	unset	down	down
Ethernet1/3	unassigned	YES	unset	down	down
Port-channel1	unassigned	YES	unset	up	up
Vlan10	192.168.1.1	YES	manual	up	up

```
SW2(config)#
SW2(config)#
SW2(config)#
SW2(config)#
```

TERMINAL (5)

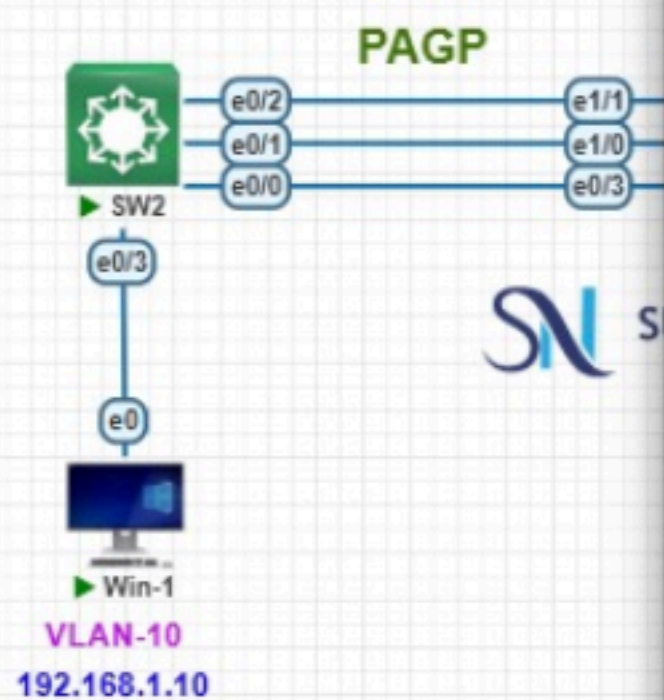

Terminal

Win-2 x SW2 x SW1 x SW3 x Win-1 x

Interface	Role	Sts	Cost	Prio.Nbr	Type
Po2	Root	FWD	47	128.65	P2p

VLAN0010

Spanning tree enabled protocol ieee

Root ID Priority 32778

Address aabb.cc00.0100

Cost 94

Port 65 (Port-channel2)

Hello Time 2 sec Max Age 20 sec Forward Delay 15 sec

Bridge ID Priority 32778 (priority 32768 sys-id-ext 10)

Address aabb.cc00.0200

Hello Time 2 sec Max Age 20 sec Forward Delay 15 sec

Aging Time 300 sec

Interface	Role	Sts	Cost	Prio.Nbr	Type
Et0/3	Desg	FWD	100	128.4	P2p
Po2	Root	FWD	47	128.65	P2p

SW3(config)#



 Notifications

The screenshot shows a Windows XP desktop with a blue background. In the foreground, there is a command prompt window titled "C:\WINDOWS\system32\cmd.exe" with the text "Windows IP Configuration". The window displays the following information:

```

Ethernet adapter Local Area Connection:

    Connection-specific DNS Suffix  . : 
    IP Address. . . . . : 192.168.1.20
    Subnet Mask . . . . . : 255.255.255.0
    Default Gateway . . . . . : 192.168.1.1

C:\Documents and Settings\user>ping 192.168.1.10

Pinging 192.168.1.10 with 32 bytes of data:

Reply from 192.168.1.10: bytes=32 time=4ms TTL=128
Reply from 192.168.1.10: bytes=32 time=3ms TTL=128
Reply from 192.168.1.10: bytes=32 time=2ms TTL=128
Reply from 192.168.1.10: bytes=32 time=3ms TTL=128

Ping statistics for 192.168.1.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 2ms, Maximum = 4ms, Average = 3ms

C:\Documents and Settings\user>
  
```

Below the command prompt, a "Local Area Connection" status window is open, showing "Details" and "Properties" tabs. The "Details" tab is selected, showing "Local Area Connection" and "LAN or High-Speed Internet". The "Properties" tab is also visible, showing "Properties" and "Disable" buttons. The taskbar at the bottom shows the Start button, several application icons, and the system tray with the time "11:03 AM" and date "11/11/2006".

labs.surennetwork.com/legacy/topology

Terminal

SW1 * Win-1 * Win-2 * SW2 *

SW2

e0/2

e0/1

e0/0

e0/3

e0

Win-1

VLAN-10

192.168.1.10

PAGP

SW1

e1/1

e1/0

e0/3

SW2

Win-1

Win-2

SW2

Interface

Role

Sts

Cost

Prio.Nbr

Type

Pol

Desg

FWD

47

128.65

P2p

VLAN0010

Spanning tree enabled protocol ieee

Root ID

Priority

32778

Address

aabb.cc00.0100

This bridge is the root

Hello Time

2 sec

Max Age

20 sec

Forward Delay

15 sec

Bridge ID

Priority

32778

(priority 32768 sys-id-ext 10)

Address

aabb.cc00.0100

Hello Time

2 sec

Max Age

20 sec

Forward Delay

15 sec

Aging Time

300 sec

Interface

Role

Sts

Cost

Prio.Nbr

Type

Et0/3

Desg

FWD

100

128.4

P2p

Pol

Desg

FWD

47

128.65

P2p

SW2(config)#

TERMINAL (4)

ENG

IN

15:35

21-09-2026