


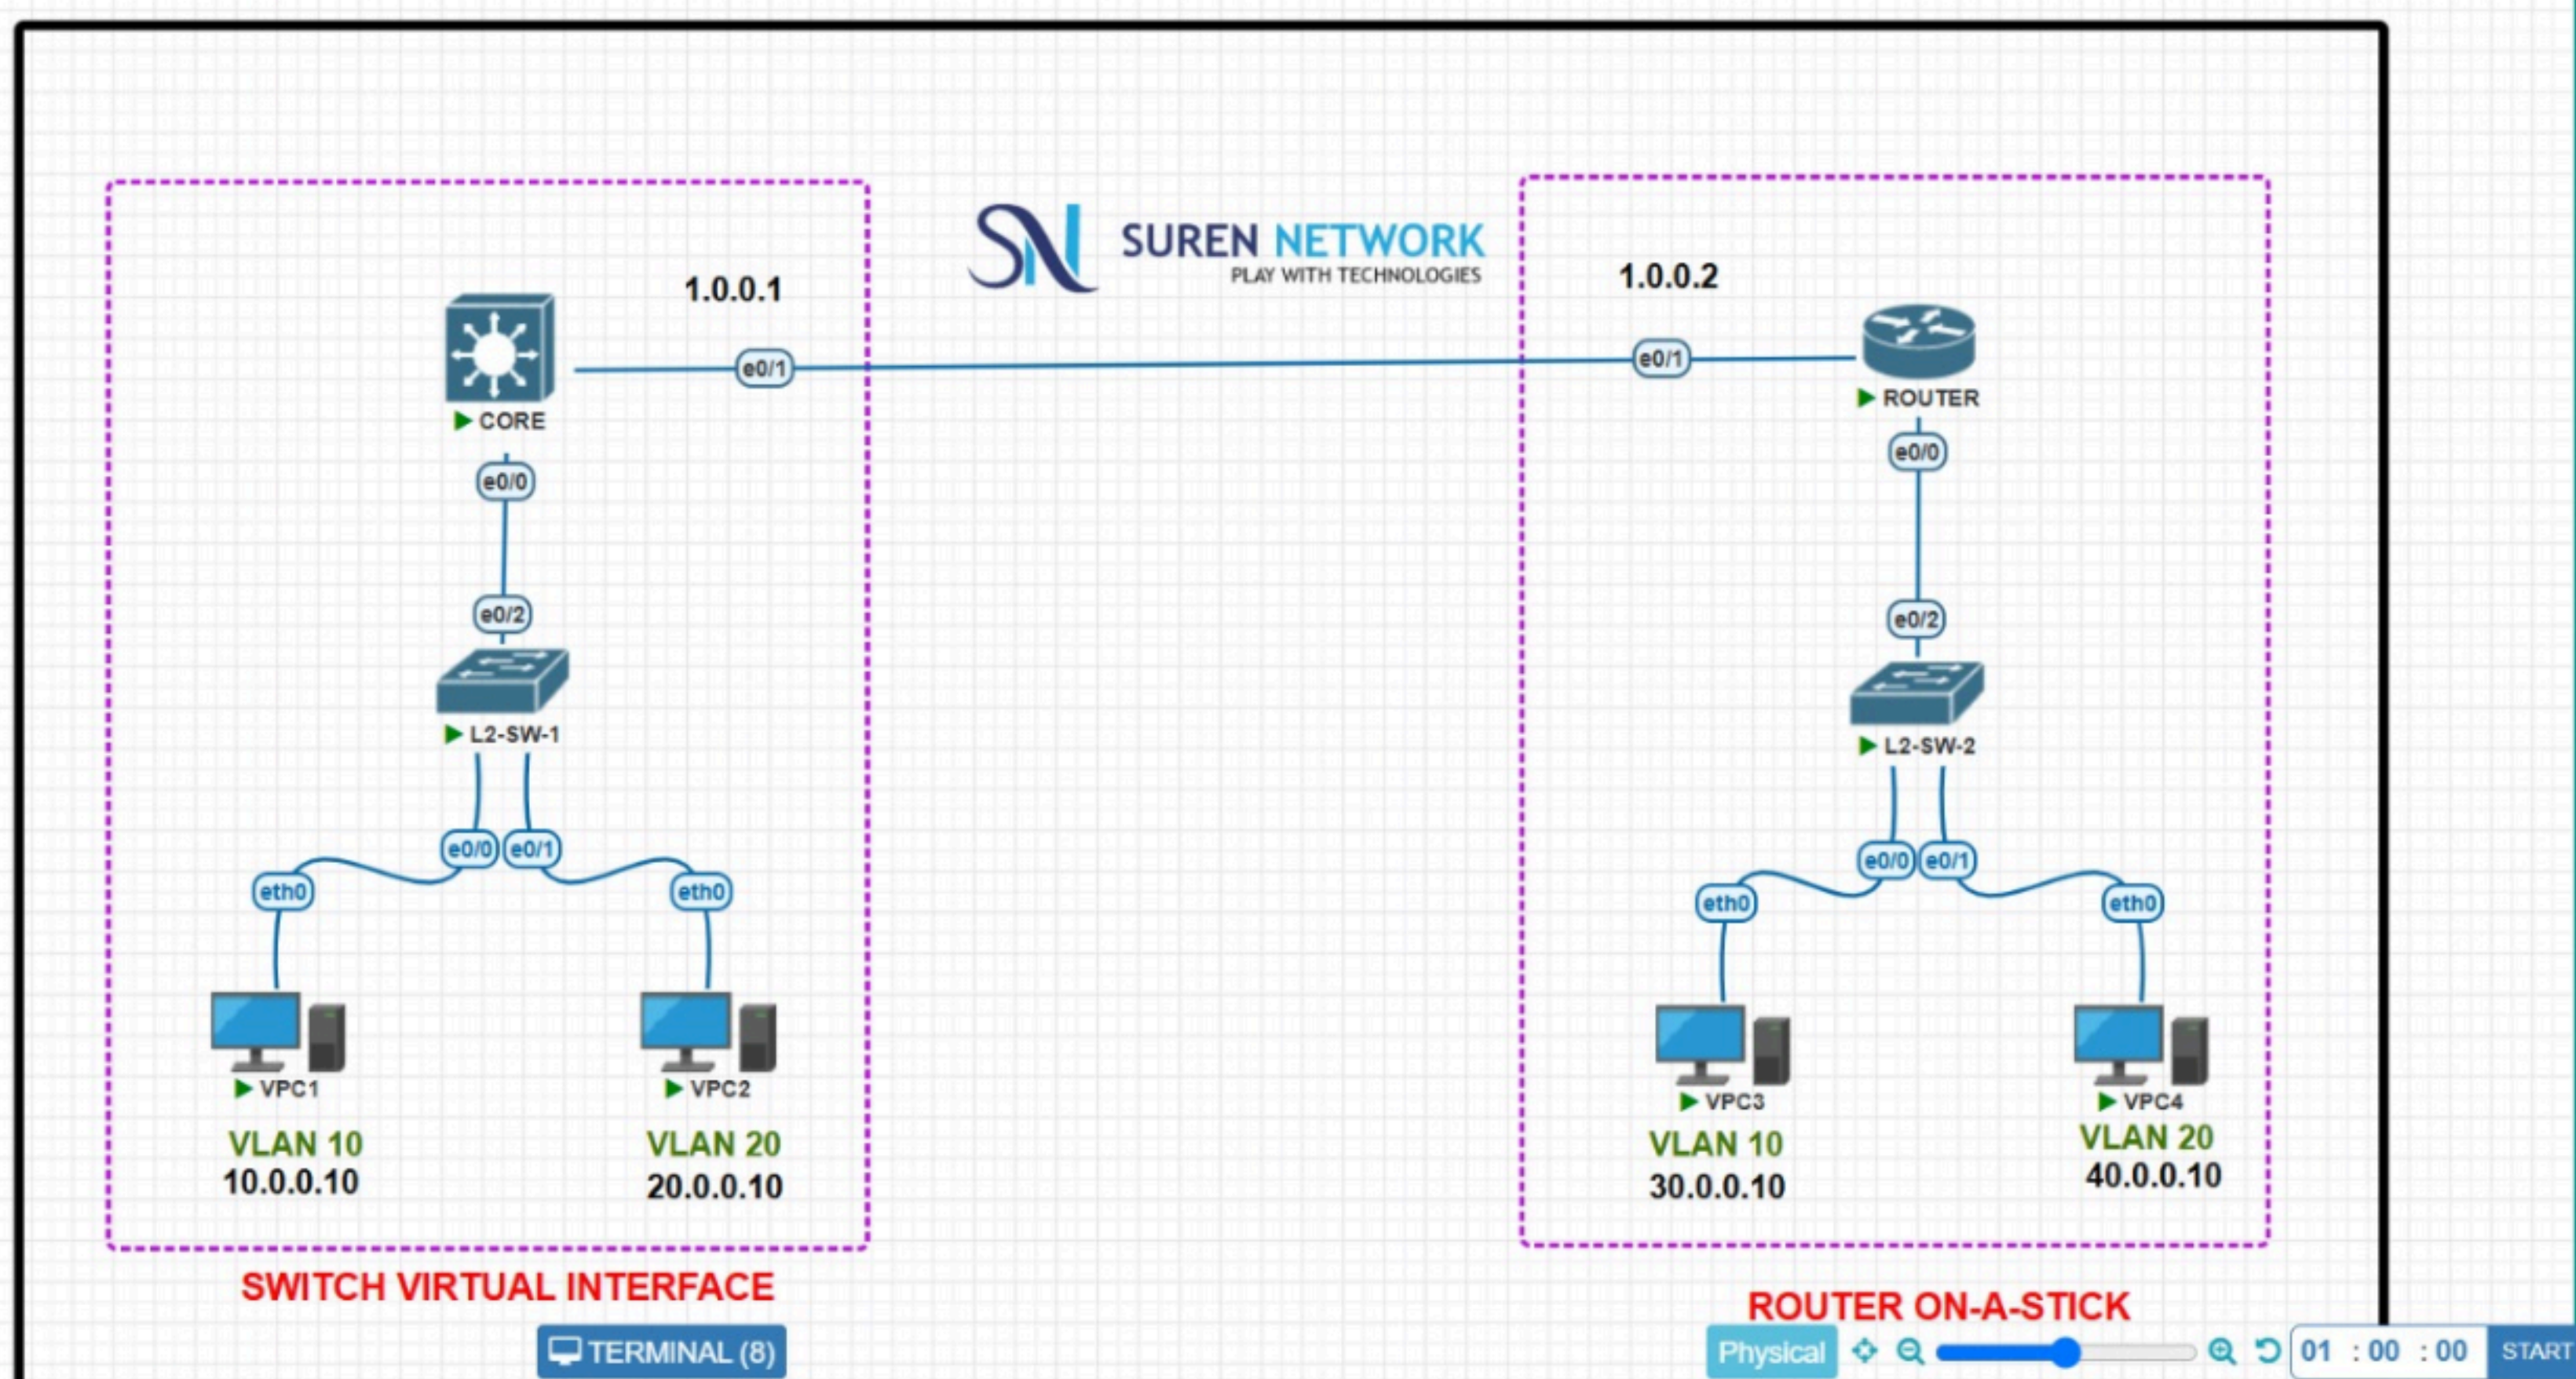

PNETLab | Topology

Maan Kuttiye Full Video Sor

Ask Gemini

labs.surennetwork.com/legacy/topology

ChatGPTWhatsAppTicketzabbixTVM DATA -CRMCOLLSalem_ZonePVINFONET APPSTOCK APR- 26-27Tiruvannamalai - FTNOTEDTiruvannamalai - ALLAll Bookmarks

Terminal

ROUTER x VPC3 x VPC4 x VPC2 x VPC1 x L2-SW-2 x CORE x L2-SW-1 x

end

L2-SW-1(config)#
L2-SW-1(config)#
L2-SW-1(config)#
L2-SW-1(config)#
L2-SW-1(config)#do sh int trunk

Port Mode Encapsulation Status Native vlan
Et0/2 auto n-802.1q trunking 1

Port Vlans allowed on trunk
Et0/2 1-4094

Port Vlans allowed and active in management domain
Et0/2 1,10,20

Port Vlans in spanning tree forwarding state and not pruned
Et0/2 1,10,20
L2-SW-1(config)#
L2-SW-1(config)#
L2-SW-1(config)#
L2-SW-1(config)#

SWITCH VIRTUAL INTERFACE

ROUTER ON-A-STICK

Physical 01 : 00 : 00 START

Intervlan

37°C
Light rain

Search

ENG IN

14:43
19-09-2026

Terminal

ROUTER x VPC3 x VPC4 x VPC2 x VPC1 x L2-SW-2 x CORE x L2-SW-1 x

```
Port      Vlans allowed and active in management domain
Et0/2     1,10,20

Port      Vlans in spanning tree forwarding state and not pruned
Et0/2     1,10,20
L2-SW-2(config)#
L2-SW-2(config)#
L2-SW-2(config)#
L2-SW-2(config)#do sh int trunk

Port      Mode          Encapsulation  Status      Native vlan
Et0/2     on             802.1q         trunking    1

Port      Vlans allowed on trunk
Et0/2     1-4094

Port      Vlans allowed and active in management domain
Et0/2     1,10,20

Port      V
Et0/2     Vlans in spanning tree forwarding state and not pruned
Et0/2     1,10,20
L2-SW-2(config)#
L2-SW-2(config)#do
```

SWITCH VIRTUAL INTERFACE

ROUTER ON-A-STICK

Physical

01 : 00 : 00

START

INTERVIEW

TERMINAL (8)

Terminal

ROUTER × VPC3 × VPC4 × VPC2 × VPC1 × L2-SW-2 × CORE × L2-SW-1 ×

```
VPC4>
VPC4>
VPC4> ping 10.0.0.10

84 bytes from 10.0.0.10 icmp_seq=1 ttl=62 time=4.186 ms
84 bytes from 10.0.0.10 icmp_seq=2 ttl=62 time=3.257 ms
84 bytes from 10.0.0.10 icmp_seq=3 ttl=62 time=2.429 ms
84 bytes from 10.0.0.10 icmp_seq=4 ttl=62 time=3.213 ms
84 bytes from 10.0.0.10 icmp_seq=5 ttl=62 time=2.427 ms

VPC4> sh ip

NAME          : VPC4[1]
IP/MASK       : 40.0.0.10/8
GATEWAY       : 40.0.0.1
DNS           :
MAC           : 00:50:79:66:68:97
LPORT        : 20000
RHOST:PORT    : 127.0.0.1:30000
MTU           : 1500

VPC4>
```

SWITCH VIRTUAL INTERFACE

ROUTER ON-A-STICK

Physical 01 : 00 : 00 START

Terminal

ROUTER × VPC3 × VPC4 × VPC2 × VPC1 × L2-SW-2 × CORE × L2-SW-1 ×

84 bytes from 10.0.0.10 icmp_seq=4 ttl=62 time=3.213 ms
84 bytes from 10.0.0.10 icmp_seq=5 ttl=62 time=2.427 ms

VPC4> sh ip

NAME : VPC4[1]
IP/MASK : 40.0.0.10/8
GATEWAY : 40.0.0.1
DNS :
MAC : 00:50:79:66:68:97
LPORT : 20000
RHOST:PORT : 127.0.0.1:30000
MTU : 1500

VPC4> ping 20.0.0.10
84 bytes from 20.0.0.10 icmp_seq=1 ttl=62 time=4.882 ms
84 bytes from 20.0.0.10 icmp_seq=2 ttl=62 time=2.685 ms
84 bytes from 20.0.0.10 icmp_seq=3 ttl=62 time=3.128 ms
84 bytes from 20.0.0.10 icmp_seq=4 ttl=62 time=2.721 ms
84 bytes from 20.0.0.10 icmp_seq=5 ttl=62 time=2.134 ms
VPC4>

SWITCH VIRTUAL INTERFACE

ROUTER ON-A-STICK

Physical 01 : 00 : 00 START

```
Terminal
ROUTER x VPC3 x VPC4 x VPC2 x VPC1 x L2-SW-2 x CORE x L2-SW-1 x

VPC3> sh ip

NAME       : VPC3[1]
IP/MASK    : 30.0.0.10/8
GATEWAY    : 30.0.0.1
DNS        :
MAC        : 00:50:79:66:68:12
LPORT     : 20000
RHOST:PORT : 127.0.0.1:30000
MTU        : 1500

VPC3>
VPC3>
VPC3> ping 10.0.0.10
84 bytes from 10.0.0.10 icmp_seq=1 ttl=62 time=2.201 ms
84 bytes from 10.0.0.10 icmp_seq=2 ttl=62 time=2.684 ms
84 bytes from 10.0.0.10 icmp_seq=3 ttl=62 time=1.952 ms
84 bytes from 10.0.0.10 icmp_seq=4 ttl=62 time=2.430 ms
84 bytes from 10.0.0.10 icmp_seq=5 ttl=62 time=2.461 ms
VPC3>
```

SWITCH VIRTUAL INTERFACE

ROUTER ON-A-STICK

TERMINAL (8)

Physical

01 : 00 : 00 START

Terminal

ROUTER x VPC3 x VPC4 x VPC2 x **VPC1 x** L2-SW-2 x CORE x L2-SW-1 x

```
VPC1> ip sh
Invalid address

VPC1> sh ip

NAME       : VPC1[1]
IP/MASK    : 10.0.0.10/8
GATEWAY    : 10.0.0.1
DNS        :
MAC        : 00:50:79:66:68:10
LPORT     : 20000
RHOST:PORT : 127.0.0.1:30000
MTU        : 1500

VPC1> ping 30.0.0.10

84 bytes from 30.0.0.10 icmp_seq=1 ttl=62 time=2.857 ms
84 bytes from 30.0.0.10 icmp_seq=2 ttl=62 time=2.437 ms
84 bytes from 30.0.0.10 icmp_seq=3 ttl=62 time=2.370 ms
84 bytes from 30.0.0.10 icmp_seq=4 ttl=62 time=3.123 ms
84 bytes from 30.0.0.10 icmp_seq=5 ttl=62 time=3.832 ms

VPC1>
```

SWITCH VIRTUAL INTERFACE

ROUTER ON-A-STICK

Physical

01 : 00 : 00

START

TERMINAL (8)

```
Terminal
ROUTER x VPC3 x VPC4 x VPC2 x VPC1 x L2-SW-2 x CORE x L2-SW-1 x


VPC3>
VPC3>
VPC3> ping 1.0.0.2

84 bytes from 1.0.0.2 icmp_seq=1 ttl=255 time=0.644 ms
84 bytes from 1.0.0.2 icmp_seq=2 ttl=255 time=0.985 ms
84 bytes from 1.0.0.2 icmp_seq=3 ttl=255 time=1.421 ms
84 bytes from 1.0.0.2 icmp_seq=4 ttl=255 time=1.422 ms
84 bytes from 1.0.0.2 icmp_seq=5 ttl=255 time=1.055 ms

VPC3> sh ip

NAME       : VPC3[1]
IP/MASK    : 30.0.0.10/8
GATEWAY    : 30.0.0.1
DNS        :
MAC        : 00:50:79:66:68:12
LPORT     : 20000
RHOST:PORT : 127.0.0.1:30000
MTU        : 1500

VPC3>
```

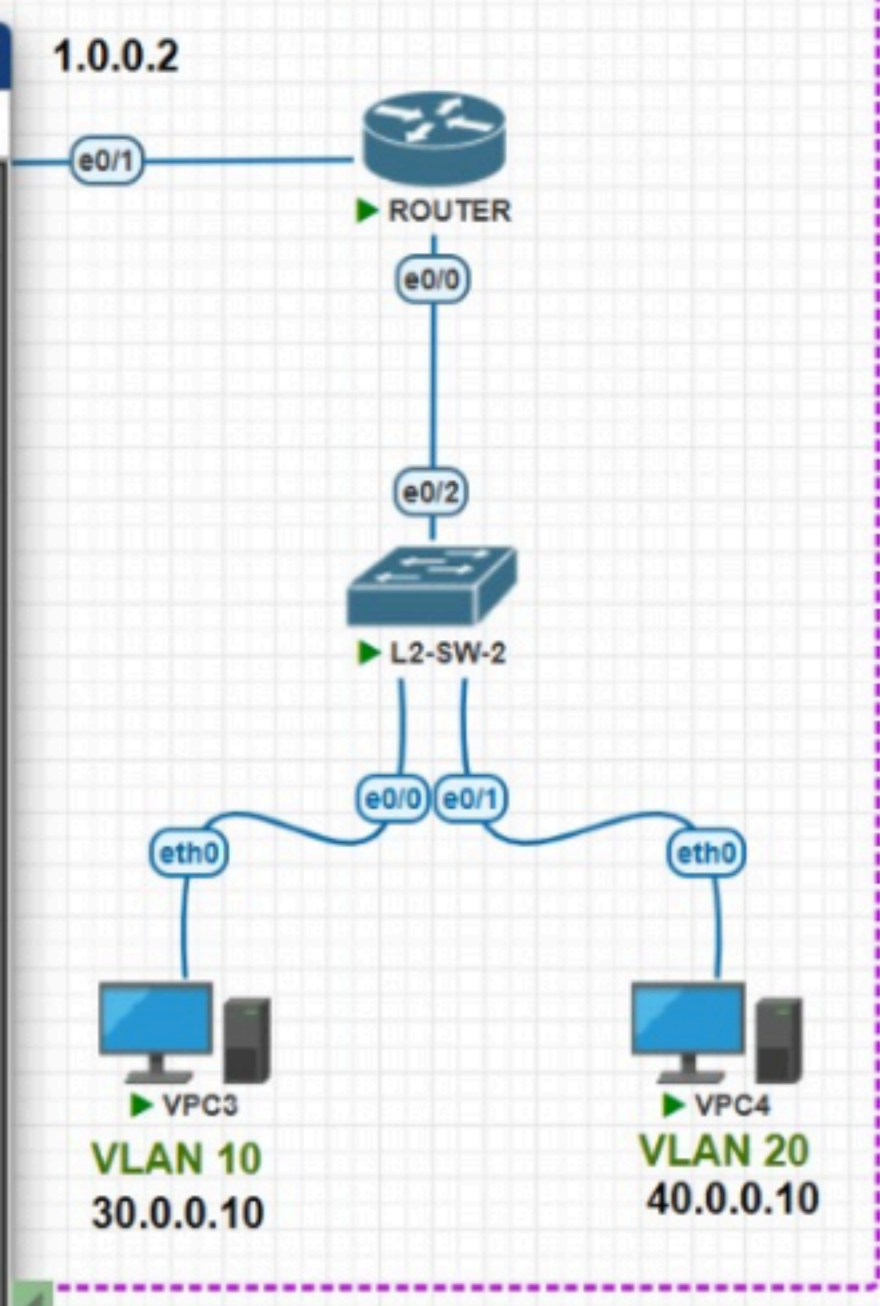

SWITCH VIRTUAL INTERFACE

ROUTER ON-A-STICK

Physical | 01 : 00 : 00 | START

Terminal

ROUTER x VPC3 x VPC4 x VPC2 x VPC1 x L2-SW-2 x CORE x L2-SW-1 x

```
!
!
interface Ethernet0/0
no ip address
duplex auto
!
interface Ethernet0/0.1
encapsulation dot1Q 10
ip address 30.0.0.1 255.0.0.0
!
interface Ethernet0/0.2
encapsulation dot1Q 20
ip address 40.0.0.1 255.0.0.0
!
interface Ethernet0/1
ip address 1.0.0.2 255.0.0.0
duplex auto
!
interface Ethernet0/2
no ip address
duplex auto
!
VL
10.0
--More--
```

SWITCH VIRTUAL INTERFACE

ROUTER ON-A-STICK

Physical

01 : 00 : 00

START

TERMINAL (8)

```
Terminal
ROUTER x VPC3 x VPC4 x VPC2 x VPC1 x L2-SW-2 x CORE x L2-SW-1 x

!
interface Ethernet0/0
  switchport trunk encapsulation dot1q
  switchport mode trunk
!
interface Ethernet0/1
  no switchport
  ip address 1.0.0.1 255.0.0.0
!
interface Ethernet0/2
!
interface Ethernet0/3
!
interface Vlan10
  ip address 10.0.0.1 255.0.0.0
!
interface Vlan20
  ip address 20.0.0.1 255.0.0.0
!
ip forward-protocol nd
!
--More--
```

SWITCH VIRTUAL INTERFACE

ROUTER ON-A-STICK

TERMINAL (8)

Physical

01 : 00 : 00 START

Terminal

ROUTER x VPC3 x VPC4 x VPC2 x VPC1 x L2-SW-2 x CORE x L2-SW-1 x

```
login
!
!
!
end

CORE(config)#
CORE(config)#
CORE(config)#
CORE(config)#
CORE(config)#do sh vlan br
```

VLAN	Name	Status	Ports
1	default	active	Et0/2, Et0/3
10	VLAN0010	active	
20	VLAN0020	active	
1002	fddi-default	act/unsup	
1003	token-ring-default	act/unsup	
1004	fddinet-default	act/unsup	
1005	trnet-default	act/unsup	

```
CORE(config)#
VL
10.0
CORE(config)#
```

SWITCH VIRTUAL INTERFACE

ROUTER ON-A-STICK

Physical

01 : 00 : 00

START