

PNETLab | Topology

labs.surennetwork.com/legacy/topology

Ask Gemini

Notifications

Terminal

Win-1 x SW1 x Win-2 x SW2 x Win-3 x Win-4 x

```
SW1#
SW1#
SW1#conf t
Enter configuration commands, one per line. End with CNTL/Z.
SW1(config)#
SW1(config)#
SW1(config)#do sh vlan br
```

VLAN	Name	Status	Ports
1	default	active	Et0/0, Et0/1, Et0/2, Et0/3
1002	fddi-default	act/unsup	
1003	token-ring-default	act/unsup	
1004	fddinet-default	act/unsup	
1005	trnet-default	act/unsup	

```
SW1(config)#
SW1(config)#
SW1(config)#vlan 10
SW1(config-vlan)#name hr
SW1(config-vlan)#ex
SW1(config)#
*Sep 15 04:08:06.128: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)
SW1(config)#vlan 20
SW1(config-vlan)#name sales
SW1(config-vlan)#ex
SW1(config)#int e0/0
SW1(config-if)#switchport access vlan 10
SW1(config-if)#ex
SW1(config)#int e0/1
SW1(config-if)#switchport access vlan 20
SW1(config-if)#ex
SW1(config)#int e0/2
SW1(config-if)#switchport trunk encapsulation dot1
SW1(config-if)#switchport mode trunk
SW1(config-if)#ex
SW1(config)#
```

VLAN 10
10.0.0.20

VLAN 20
20.0.0.20

Win-3

Win-4

Physical

01 : 00 : 00

START

28°C Sunny

Search

ENG IN

09:51 15-09-2026

PNETLab | Topology

labs.surenetwork.com/legacy/topology

Terminal

Win-1 x SW1 x Win-2 x SW2 x Win-3 x Win-4 x

```
C:\WINDOWS\system32\cmd.exe
Microsoft Windows XP [Version 5.1.2600]
(C) Copyright 1985-2001 Microsoft Corp.

C:\Documents and Settings\user>ping 10.0.0.20

Pinging 10.0.0.20 with 32 bytes of data:

Reply from 10.0.0.20: bytes=32 time=2ms TTL=128
Reply from 10.0.0.20: bytes=32 time=2ms TTL=128
Reply from 10.0.0.20: bytes=32 time=1ms TTL=128
Reply from 10.0.0.20: bytes=32 time=1ms TTL=128

Ping statistics for 10.0.0.20:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 2ms, Average = 1ms

C:\Documents and Settings\user>
```

0000 01 80 c2 00 00 00 aa bb cc 00 01 00 00 26 42 42&B&B
0010 02 00 00 00 00 00 80 0a aa bb cc 00 01 00 00 00
0020 00 00 80 0a aa bb cc 00 01 00 80 01 00 00 14 00
0030 02 00 0f 00 00 00 00 00 00 00 00 00 00 00 00<P>

Frame (frame), 60 bytes | Packets: 77 | Displayed: 77 (100.0%) | Profile: Default

Physical

VLAN 10
10.0.0.20

VLAN 20
20.0.0.20

01 : 00 : 00

START

28°C Sunny

Search

ENG IN

09:51 15-09-2026

PNETLab | Topology

labs.surennetwork.com/legacy/topology

Terminal

```
Win-1 x SW1 x Win-2 x SW2 x Win-3 x Win-4 x
SW2(config-vlan)#name sales
SW2(config-vlan)#ex
SW2(config)#int e0/0
SW2(config-if)#switchport access vlan 10
SW2(config-if)#ex
SW2(config)#int e0/1
SW2(config-if)#switchport access vlan 20
SW2(config-if)#ex
SW2(config)#int e0/2
*Sep 15 04:16:34.794: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)
SW2(config)#int e0/2
SW2(config-if)#
SW2(config-if)#
SW2(config-if)#switchport trunk encapsulation dot1q
SW2(config-if)#switchport mode
% Incomplete command.

SW2(config-if)#switchport mode trunk
SW2(config-if)#ex
SW2(config)#
SW2(config)#
SW2(config)#do sh vlan br
```

VLAN	Name	Status	Ports
1	default	active	Et0/3
10	hr	active	Et0/0
20	sales	active	Et0/1
1002	fdi-default	act/unsup	
1003	token-ring-default	act/unsup	
1004	fdinet-default	act/unsup	
1005	trnet-default	act/unsup	

VLAN TRUNK

Win-3

VLAN 10
10.0.0.20

Win-4

Snipping Tool

Screenshot copied to clipboard
Automatically saved to screenshots folder.

Mark-up and share

28°C Sunny

Search

ENG IN

09:51
15-09-2026

PNETLab | Topology

labs.surenetwork.com/legacy/topology

Terminal

Win-1 x SW1 x Win-2 x SW2 x Win-3 x Win-4 x

Capturing from Local Area Connection [Wireshark 1.10.14 (v1.10.14-0-g825f971 from master-1.10)]

Filter: Expression... Clear Apply Save

No.	Time	Source	Destination	Protocol	Length	Info
49	66.4973690	10.0.0.10	10.0.0.20	ICMP	74	Echo (ping) reply
50	67.4879580	10.0.0.20	10.0.0.10	ICMP	74	Echo (ping) request
51	67.4897000	10.0.0.10	10.0.0.20	ICMP	74	Echo (ping) reply
52	67.4901330	aa:bb:cc:00:02:100	aa:bb:cc:00:02:100	Spanning-tree-(for-STP)	60	Conf. Root = 32768/10/
53	68.4879200	10.0.0.20	10.0.0.10	ICMP	74	Echo (ping) request
54	68.4895840	10.0.0.10	10.0.0.20	ICMP	74	Echo (ping) reply
55	69.4881380	10.0.0.20	10.0.0.10	ICMP	74	Echo (ping) request
56	69.4911570	10.0.0.10	10.0.0.20	ICMP	74	Echo (ping) reply
57	69.9997220	aa:bb:cc:00:02:100	aa:bb:cc:00:02:100	Spanning-tree-(for-STP)	60	Conf. Root = 32768/10/
58	70.8137550	aa:bb:cc:00:02:100	aa:bb:cc:00:02:100	CDP/VTP/DTP/PagP/UDDP	60	Dynamic Trunking Proto
59	70.8137760	aa:bb:cc:00:02:100	aa:bb:cc:00:02:100	CDP/VTP/DTP/PagP/UDDP	90	Dynamic Trunking Proto
60	71.9995490	aa:bb:cc:00:02:100	aa:bb:cc:00:02:100	Spanning-tree-(for-STP)	60	Conf. Root = 32768/10/
61	73.9995560	aa:bb:cc:00:02:100	aa:bb:cc:00:02:100	Spanning-tree-(for-STP)	60	Conf. Root = 32768/10/
62	75.9995270	aa:bb:cc:00:02:100	aa:bb:cc:00:02:100	Spanning-tree-(for-STP)	60	Conf. Root = 32768/10/

C:\WINDOWS\system32\cmd.exe

C:\Documents and Settings\user>ping 10.0.0.10

Pinging 10.0.0.10 with 32 bytes of data:

Reply from 10.0.0.10: bytes=32 time=1ms TTL=128

Reply from 10.0.0.10: bytes=32 time=1ms TTL=128

Reply from 10.0.0.10: bytes=32 time=1ms TTL=128

Reply from 10.0.0.10: bytes=32 time=3ms TTL=128

Ping statistics for 10.0.0.10:

Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),

Approximate round trip times in milli-seconds:

Minimum = 1ms, Maximum = 3ms, Average = 1ms

C:\Documents and Settings\user>

VLAN 10
10.0.0.20

VLAN 20
20.0.0.20

Physical

01:00:00 START

28°C Sunny

Search

ENG IN

09:51 15-09-2026

The screenshot shows a Windows XP desktop with a blue background. In the foreground, a 'Network Connections' window is open, displaying a 'Local Area Connection' status. A 'Do you want...' dialog box is overlaid on top of this window, asking if the user wants to restart the connection. To the right of the dialog box, a small window shows a diagram of a network connection with a computer icon and a router icon, with 'Sent' and 'Received' packets listed as 110 and 11 respectively. Below this, there are 'Properties' and 'Disable' buttons. In the background, a command prompt window is open, showing the execution of a ping command to 20.0.0.10. The command prompt text is as follows:

```
C:\WINDOWS\system32\cmd.exe
Microsoft Windows XP [Version 5.1.2600]
(C) Copyright 1985-2001 Microsoft Corp.

C:\Documents and Settings\user>ping 20.0.0.10


Pinging 20.0.0.10 with 32 bytes of data:

Reply from 20.0.0.10: bytes=32 time=3ms TTL=128
Reply from 20.0.0.10: bytes=32 time=2ms TTL=128
Reply from 20.0.0.10: bytes=32 time=3ms TTL=128
Reply from 20.0.0.10: bytes=32 time=2ms TTL=128

Ping statistics for 20.0.0.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 2ms, Maximum = 3ms, Average = 2ms

C:\Documents and Settings\user>
```

The taskbar at the bottom shows the Start button, several open applications, and the system clock displaying 5:22 AM on 5/22/2008.

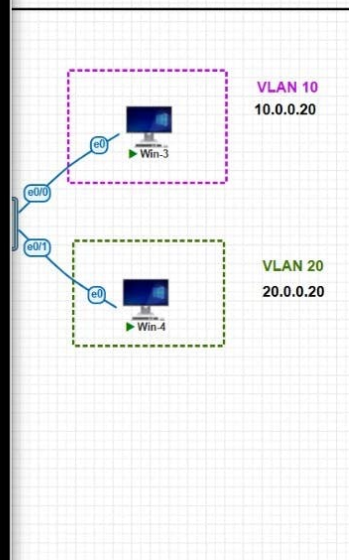

PNETLab | Topology

labs.surennetwork.com/legacy/topology

Ask Gemini

Notifications

Terminal

Win-1 x SW1 x Win-2 x SW2 x Win-3 x Win-4 x

Network Connections

C:\WINDOWS\system32\cmd.exe

Microsoft Windows XP (Version 5.1.2600)
(C) Copyright 1985-2001 Microsoft Corp.

C:\Documents and Settings\User>ping 20.0.0.20

Pinging 20.0.0.20 with 32 bytes of data:

Reply from 20.0.0.20: bytes=32 time=4ms TTL=128

Reply from 20.0.0.20: bytes=32 time=2ms TTL=128

Reply from 20.0.0.20: bytes=32 time=1ms TTL=128

Reply from 20.0.0.20: bytes=32 time=1ms TTL=128

Ping statistics for 20.0.0.20:

Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),

Approximate round trip times in milli-seconds:

Minimum = 1ms, Maximum = 4ms, Average = 2ms

C:\Documents and Settings\User>

Other Places

Control Panel

My Network Places

My Documents

My Computer

Details

Local Area Connection

LAN or High-Speed Internet

connection

Sent

Received

Packets: 77 | 7

Properties

Disable

Close

Local Area Connection is now connected

Speed: 1.0 Gbps

VLAN 10

10.0.0.20

Win-3

VLAN 20

20.0.0.20

Win-4

Physical

01 : 00 : 00

START

28°C Sunny

Search

ENG IN

09:52 15-09-2026

