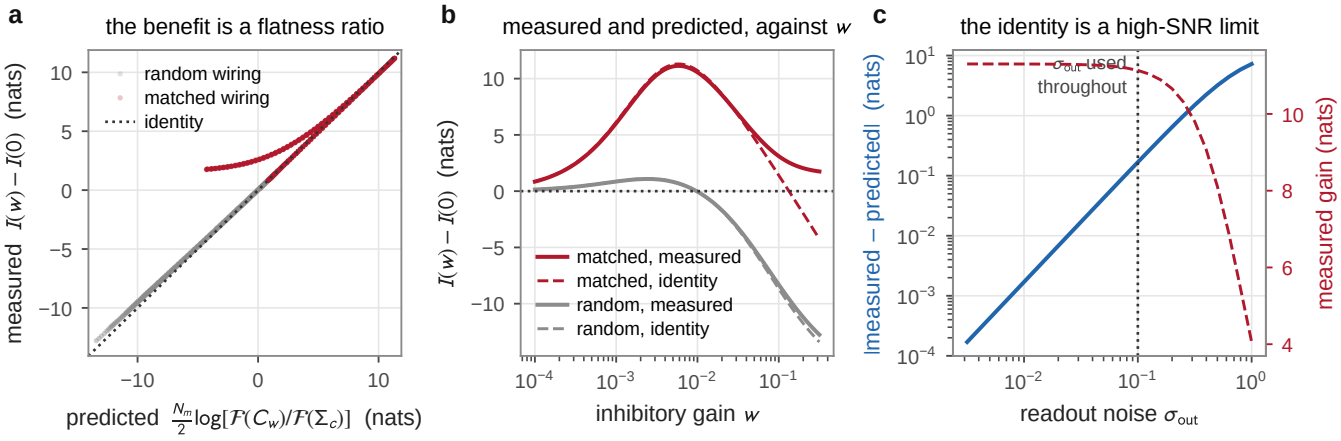
a
the benefit is a flatness ratio
random wiring
matched wiring
identity
measured $\mathcal{I}(w) - \mathcal{I}(0)$ (nats)
predicted $\frac{N_m}{2}\log[\mathcal{F}(C_w)/\mathcal{F}(\Sigma_o)]$ (nats)
b
measured and predicted, against w
matched, measured
matched, identity
random, measured
random, identity
$\mathcal{I}(w) - \mathcal{I}(0)$ (nats)
inhibitory gain w
c
the identity is a high-SNR limit
σ_{out} used throughout
|measured − predicted| (nats)
measured gain (nats)
readout noise σ_{out}