

DIE ORDER JUSTIFICATION FORM

SHIPMENT VIA: LAND ☒
AIR ☐

Die Supplier: PHME

Press code	Die No/str	Die Specifications	Wt/m.	Delivery Request Date	Org	New	Repeat.	Last Die Order Date	Die stock Level	Justification			Customer Ref.
										Reg. Order	Pre-mature failure	O/wt	
E	15842-507	Dia 220x160; 4 CAV; PH				☐	☒						BACKUP
E	15860-523	DIA 280x160; 2 CAV; PH				☐	☒						BACKUP
E	26209-509	DIA 280x160; 2 CAV; SF					☒						BACKUP (TOP URGENT)
B	27069-205	Dia 320X160; 1 CAV; SF					☒			Need in 5 Days			BACKUP (TOP URGENT)
D	28923-404	DIA 250x160; 1 CAV; PH				☐	☒						BACKUP
F	30479-602	Dia 450X250; 1 CAV; PH				☐	☒						BACKUP
	INS-26207	DIA 300X100				☐	☒						BACKUP (TOP URGENT)

Ordered By


(To be signed and faxed back to Gulf Extrusion's as order confirmation by the Die supplier)

Order received date :-

Signature :-



20229

HALF SCALE



DETAIL-I
GULF EXTRUSIONS
(IDENTIFICATION MARK)

SUPPLIER	PHME	DATE	- 22/01/2026
EMAIL THE DESIGN BEFORE MANUFACTURING			
DIE SIZE	-	220x160	
No OF CAV	- 4	PRESS	- P5
SOLID	-	HOLLOW	- Yes
BOLSTER No.	-	INSERT No.	- I-12495
SIZE	-	SIZE	- Old
REQUESTED DELIVERY DATE			02/02/2026
3D MODULE FOR SIMULATION			- No
MODE OF SHIPMENT		-	
NOTE: PROFILE WEIGHT SHOULD START FROM%			
FINISH	Mil ☐	Anodizing ☒	Powder coating ☐

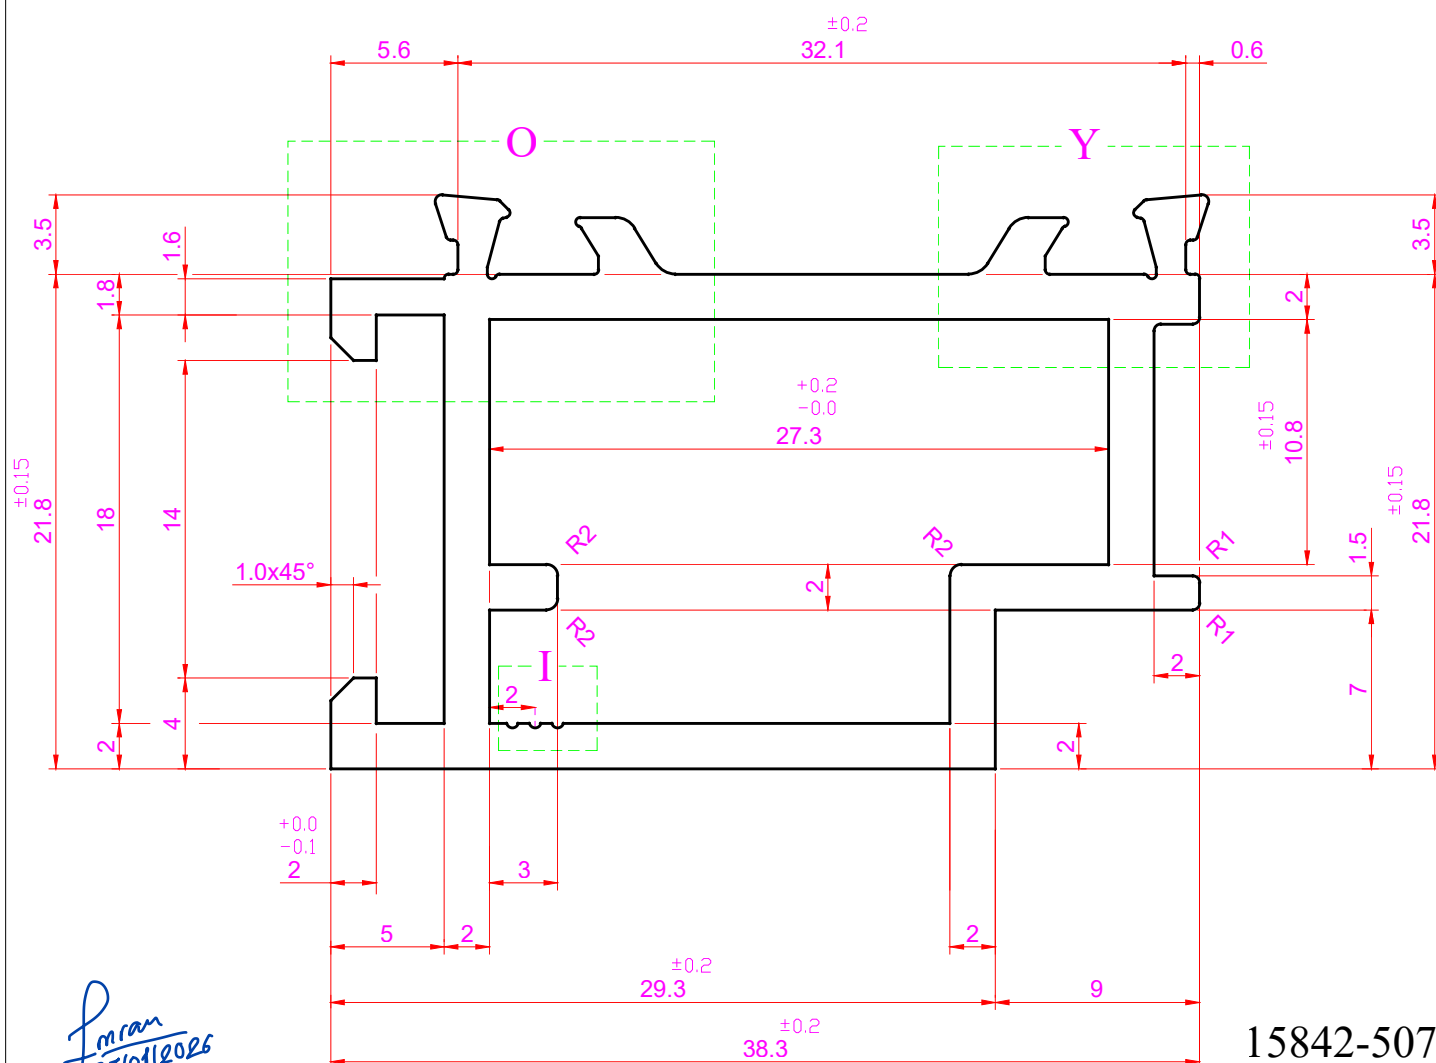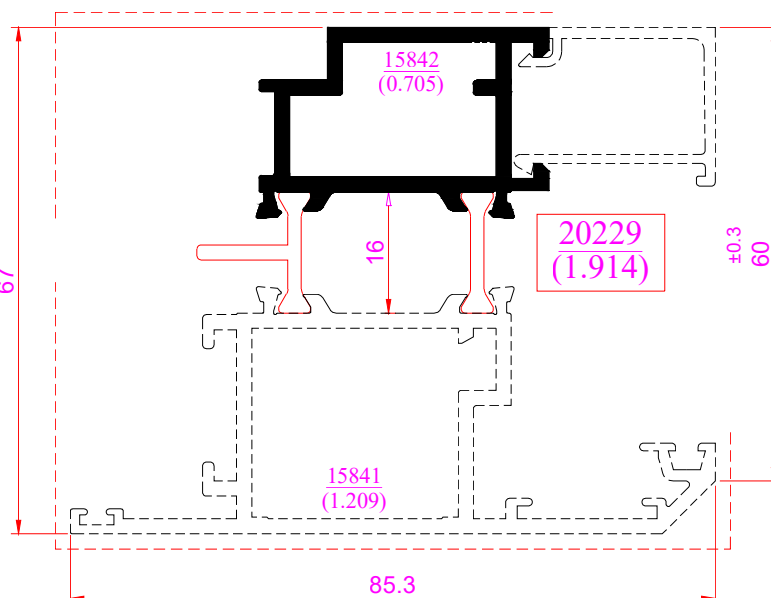

15842-507

1. All dimensions are in millimeter
2. For sharp corners radius = 0.3R
3. BS:1474 (amended version-consists BS EN 755 series)applicable for tolerances - unless mentioned otherwise
4. F=full rad ; R=0.2rad ; R1=0.3rad ; R2=0.5rad ; R3=1.0rad

FOR DETAILS O & Y REFER ANOTHER SHEET

Gen. wall thickness	2 . 0	Container diameter		Ext./R	.	Mating :	WITH 20229 AS SHOWN ABOVE			Section No. 15842
Weight in kg./m.	0 . 705	No. of cavites			.	Date :	16/10/06	Scale :	1:1 2:1 5:1	
Perimeter	168.50 95.60	Alloy	6063-T5		.	Drn. By :		Appd. By :		




P.O.Box-5598, DUBAI- United Arab Emirates
Tel +9714 8846146 Fax +9714 8846830
Email:mail@gulfex.com Web:www.gulfex.com

SPECIAL NOTES:-

JIG / HOLE FOR POWDER COATING SHALL BE
WITHIN 15mm FROM THE EDGE OF PROFILE


NOTE :- (xx) SLIGHT SHADES/BLENDS MIGHT APPEAR.

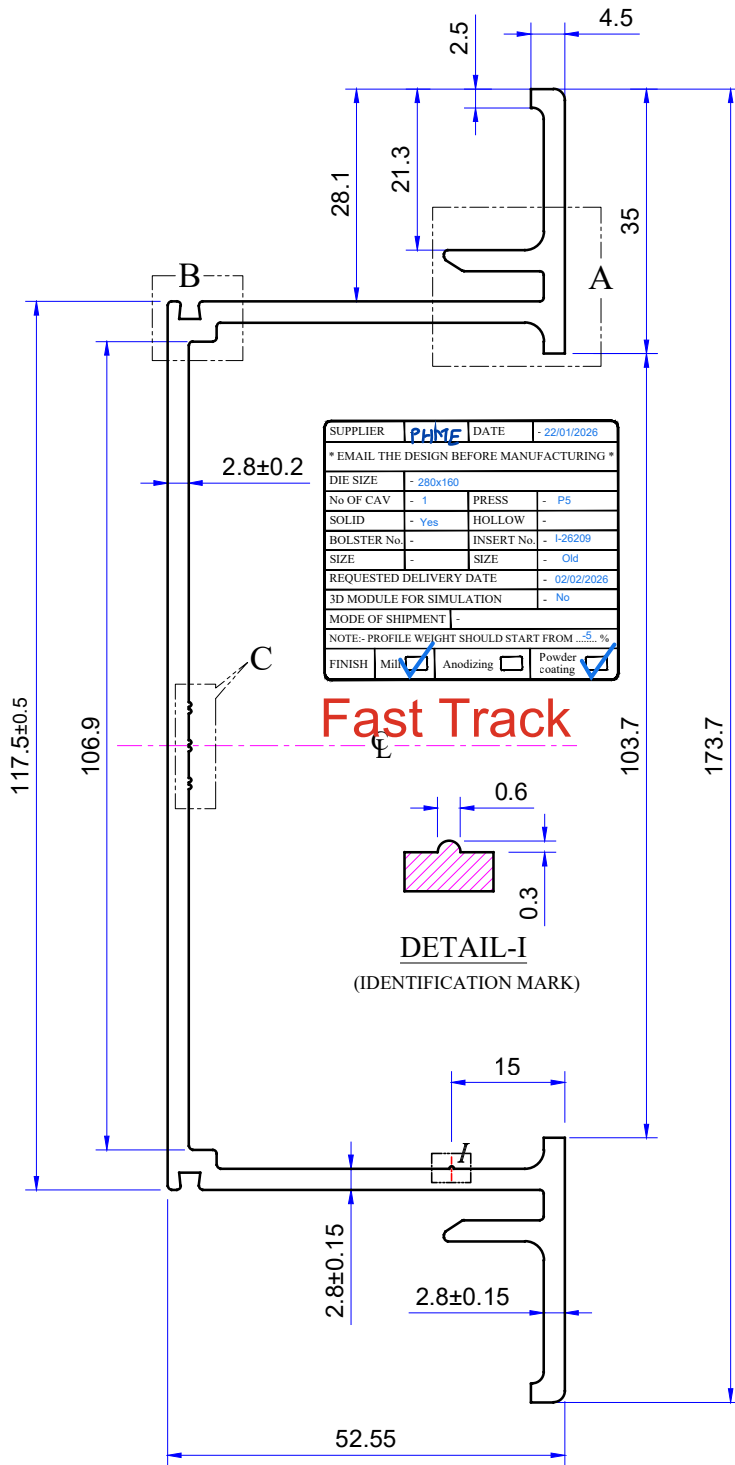

Fast Track


DETAIL-I
(IDENTIFICATION MARK)

SCALE 1:1

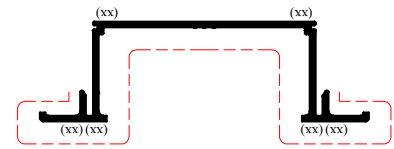


SCALE 1:4

TOP URGENT

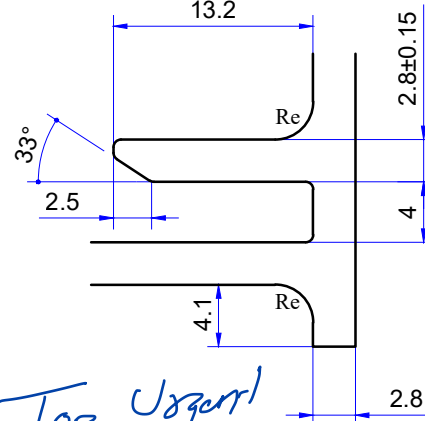


DETAIL - A
SCALE 2:1

Top Urgent!

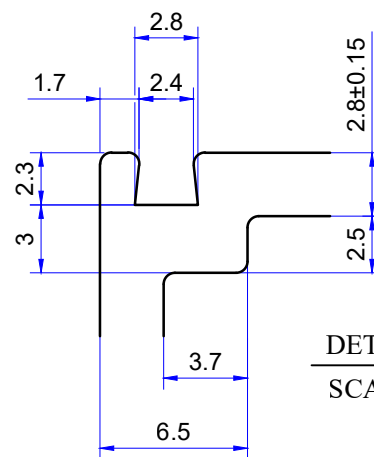

DETAIL - B
SCALE 3:1



DETAIL - C
SCALE 2:1

26209-509

1. All dimensions are in millimeter
2. All unspecified radius = 0.5R
3. BS EN 755-9:2016 applicable for tolerances - unless mentioned otherwise
4. F=full rad, Ra=1.0rad, Rc=1.5rad, Re=2.5rad







P.O.Box-5598, DUBAI- United Arab Emirates
Tel +9714 8846146 Fax +9714 8846830
Email:mail@gulfex.com Web:www.gulfex.com

Customer :

Main visible surf.: - - - - -	C/S Area	879.06	CCD	174	Description :				
Sec. visible surf.: - - - - -	Weight kg/m.	2.374	Alloy	6063	Ref. No. :	I-117-E	NPE	N1870648-040	
Main visible surface	General wall thickness	2.8	Temper	T6	Mating :		Appd.	Rev	01
C/S Length	Area/mtr.	627	Ext./R		Scale : 1:4, 1:1, 2:1	Drawn	Ravinder	Section No.	
366	Total Internal Perimeter		No. of cavites		Die Criticality	3	Date	05/11/18	26209

NOTE :- (xx) BLEND LINE / SHADE MARK MAY APPEAR.
(**) SHUT OFF MARK MAY APPEAR.


Architectural floor plan of the 29224 site. The plan shows a large building footprint with several internal divisions and a parking area. The building footprint is outlined in solid black, while the parking area is outlined in dashed lines. The plan includes various annotations such as "XX" and "XX XX" indicating specific locations or features. A scale of 1:2 is indicated at the bottom.

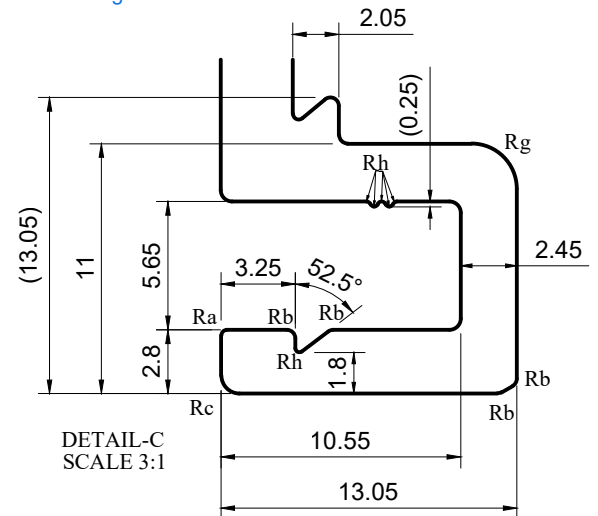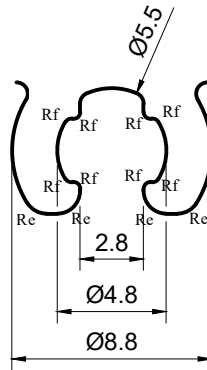

- الخليج للسحب
Gulf Extrusions

P.O.Box-5598, DUBAI- United Arab Emirates
Tel +9714 8846146 Fax +9714 8846830
Email:mail@gulfex.com Web:www.gulfex.com

Main visible surf.: -----		C/S Area	1272.69	CCD	150	Description :			Expansion Sill					
Sec. visible surf.: ____-____		Weight kg/m.	3.436	Alloy	6063	Ref. No. :			A160			NPE	N2170736-010	
Main visible surface		General wall thickness	3.0,2.55	Temper	T6	Mating :			29224			Appd. by P.Kuca	Rev	01
C/S Length	Area/mtr.	External Perimeter	917	Ext./R		Scale : 2:3 , 1:2, 3:1		Drawn	Bashar		Section No.			
155		Total Internal Perimeter		No. of cavites		Die Critically	4	Date	04/01/2022					
													27069	

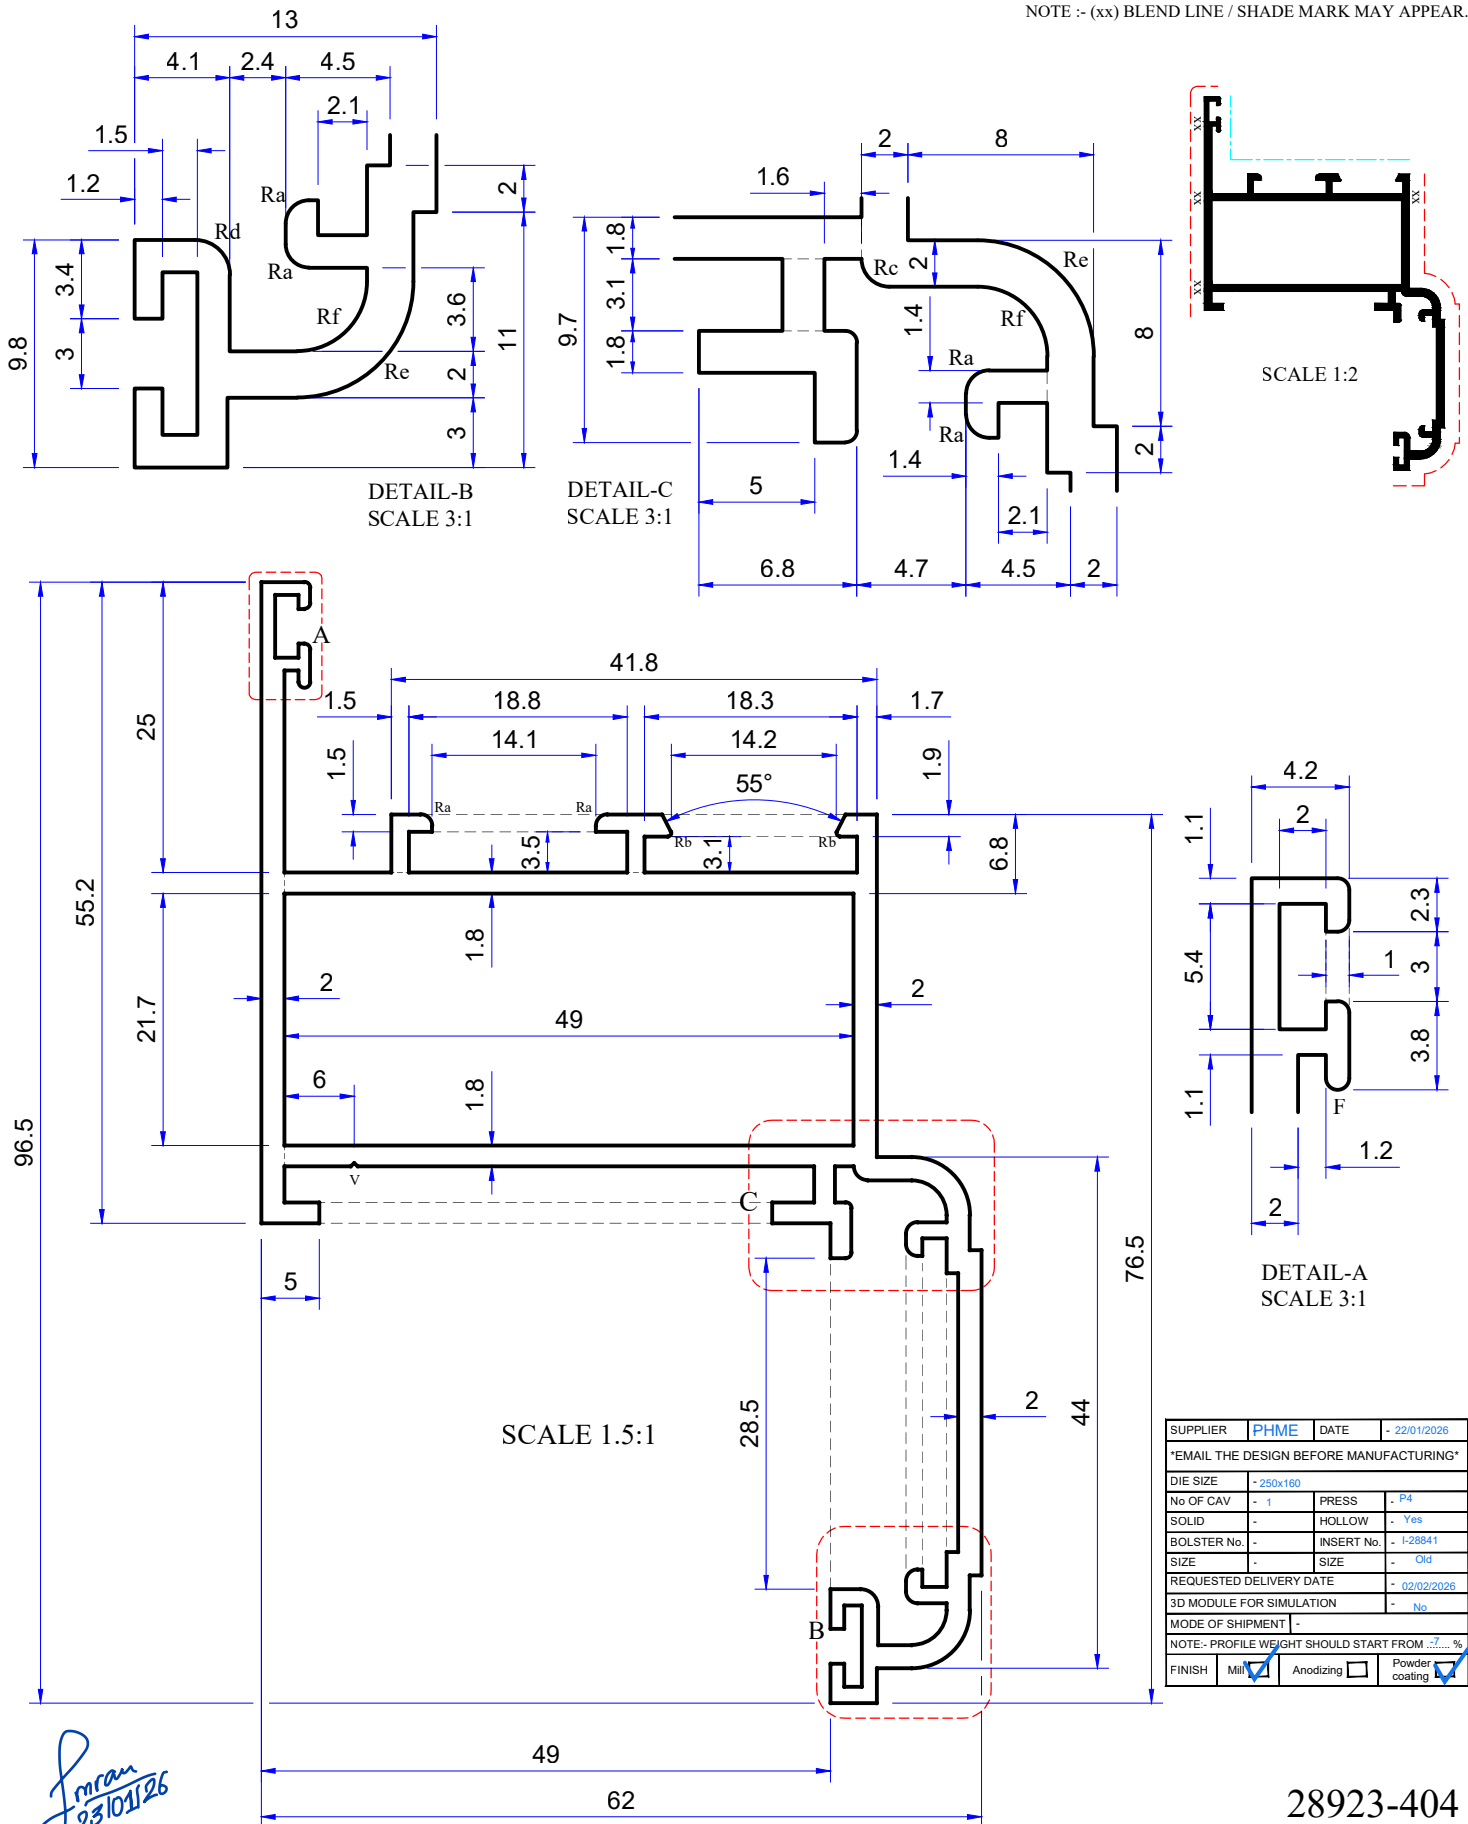

SUPPLIER	PHME	DATE	- 22/01/2026
EMAIL THE DESIGN BEFORE MANUFACTURING			
DIE SIZE	- 250x160		
No OF CAV	- 1	PRESS	- P4
SOLID	-	HOLLOW	- Yes
BOLSTER No.	-	INSERT No.	- I-28841
SIZE	-	SIZE	- Old
REQUESTED DELIVERY DATE	-		- 02/02/2026
3D MODULE FOR SIMULATION	-		- No
MODE OF SHIPMENT	-		
NOTE:- PROFILE WEIGHT SHOULD START FROM ...? ... %			
FINISH	Mil	Anodizing	Powder coating

28923-404

1. All dimensions are in millimeter
2. All unspecified radius=0.5R.
3. BS EN 755-9:2016 applicable for tolerances - unless mentioned otherwise
4. F=Full Radius,Ra=1.0rad,Rb=0.3rad,Rc=1.2rad,Rd=1.5rad,Re=5.0rad,Rf=3.0rad.
5. V=0.3x90°.

الخليج للسحب
Gulf Extrusions

P.O.Box-5598, DUBAI- United Arab Emirates
Tel +9714 8846146 Fax +9714 8846830
Email:mail@gulfex.com Web:www.gulfex.com

Customer :

Description :

Main visible surf.: - - - - -	C/S Area	556.08	CCD	110
Sec. visible surf.: - - - - -	Weight kg/m.	1.501	Alloy	6063
Main visible surface	General wall thickness	1.8,2.0	Temper	T6
C/S Length	Area/mtr.	External Perimeter	476	Ext./R
285		Total Internal Perimeter	141	No. of cavites

Ref. No. :	14149	NPE	N2070894-130
Mating :		Appd.	Rev 00
Scale : 1.5:1, 1:2, 3:1	Drawn	Bashar	Section No.
Die Criticality	3	Date	15/12/20
			28923

NOTE :- (x) SLIGHT SHADES/BLENDS MARK AS PER SCHUCO STANDARD

TOP

M16

30

150

76.6

-5%

9.2

7.0

72.5

7.8

6.6

3.6

3.2

6.6

10.0

16.8

100

10

24

Ø12

M

ACCIAIO L5

IBH-300X100-□

669_DIS_FIN_INS_300x100

[illegible]