# Intelligent Workspace Management System

Group ID 14: Vikas Ananda Berad, Sukesh Jiwane Service Computing Department, University of Stuttgart

st186257@stud.uni-stuttgart.de st186176@stud.uni-stuttgart.de

July 17, 2024

#### Abstract

The Intelligent Workspace Management System (IWMS) is designed to create an advanced environment that enhances productivity, comfort, and safety in workspaces. By harnessing the power of the Internet of Things (IoT) and AI planning, IWMS collects and processes data from various sensors, using this information to intelligently adjust workspace conditions. The system's architecture is comprised of four layers: Physical (sensors and actuators), Connectivity (data acquisition and real-time updates), Intelligence (AI-based data processing and action planning), and Interaction (dashboard for monitoring and control). Essential components include a Raspberry Pi, Grove Pi+, sensors (ultrasonic, PIR, temperature and humidity, light, sound), and actuators (buzzer, LCD display, LEDs), with MQTT for communication, Node-RED for data flow management and visualization.

IWMS fulfills functional requirements such as efficient ambient control, occupancy monitoring, safety management, and a user-friendly interface. Through detailed hardware specifications and software components, including the use of Planning Domain Definition Language (PDDL) for AI planning, IWMS offers a comprehensive system that enhances workspace conditions, reduces energy consumption, and boosts overall productivity. By automating tasks and optimizing resource utilization, IWMS marks a significant advancement in smart workspace management technologies.

**Keywords:** Intelligent Workspace Management System, IoT, Automation, AI Planning, Smart Monitoring

# 1 System Introduction

The Intelligent Workspace Management System (IWMS) is engineered to create a smart, efficient workspace. Utilizing IoT, it automates functions such as climate control, Access control system, and safety management. The system enhances user comfort and safety while optimizing energy usage and operational

efficiency. By continuously analyzing data from various sensors, IWMS can adapt to changing conditions in real-time. This dynamic approach not only ensures a productive work environment but also significantly reduces operational costs. Furthermore, the user-friendly interface allows for seamless monitoring and control, making it easy to manage and customize workspace settings.

# 1.1 Importance of IoT and AI Planning in Workspace Management

In recent years, the adoption of IoT and AI planning technologies has revolutionized many industries, including workspace management. Traditional workspace environments often rely on manual control and reactive responses to changing conditions, leading to inefficiencies and increased operational costs. The implementation of IoT allows for real-time data collection and monitoring, while AI planning enables proactive decision-making and automation of routine tasks by generating intelligent plans based on the collected data. This combination of IoT and AI fosters smarter, more efficient workspaces that enhance productivity, reduce energy consumption, and streamline operations.

## 1.2 Problem Statement

Traditional workspace management systems are inefficient, relying on manual operations and reactive measures that lead to inconsistent conditions, energy wastage, delayed responses, and increased workload for facility managers. These systems often fail to maintain optimal comfort and safety levels due to the lack of automation. The Intelligent Workspace Management System (IWMS) addresses these issues by integrating IoT and AI planning to create a smart, automated environment. IWMS optimizes ambient conditions by using real-time sensor data to automatically adjust HVAC and lighting systems, monitors occupancy to enhance energy efficiency, and continuously tracks safety parameters to mitigate risks. By minimizing manual intervention and providing a user-friendly dashboard for real-time control, IWMS ensures a consistently comfortable, safe, and efficient workspace, ultimately improving productivity and reducing operational costs.

## 1.3 Goals

- Temperature and Humidity Control: Utilize IoT sensors to continuously monitor and automatically adjust HVAC systems, maintaining optimal temperature and humidity levels.
- Lighting Control: Use ambient light sensors to measure light levels and automatically adjust artificial lighting for optimal brightness and energy efficiency.

- Energy Saving: Optimize HVAC and lighting system operations based on real-time occupancy and environmental data to minimize energy consumption and reduce costs.
- Noise Monitoring: Deploy sound sensors to continuously monitor noise levels and implement automated adjustments or alerts to maintain a conducive work environment.
- Automatic Access Control for Doors: Use ultrasonic sensor to detect occupancy and automate door access, enhancing security and convenience.
- User-Friendly Dashboard for Monitoring and Notifications: Provide a comprehensive, real-time dashboard that allows users to monitor conditions, customize settings, and receive alerts and notifications for any anomalies.

# 2 System Architecture Design

The architecture of the IWMS consists of four layers: Sensor, Connectivity, Intelligence, and Interaction layers.

## 2.1 System Architecture Layers

## 2.1.1 Sensor Layer

The Sensor Layer consists of various sensors and actuators connected to a central controller, typically a Raspberry Pi. This layer is responsible for the initial collection of environmental data and the execution of control actions.

### • Sensors:

- Temperature and Humidity Sensor: Measures ambient temperature and humidity.
- **PIR Sensor:** Detects motion to monitor occupancy.
- Ultrasonic Sensors: Measure distance to detect presence in front of the door.
- **Light Sensor:** Monitors the level of natural and artificial light.
- Sound Sensor: Detects noise levels.

### • Actuators:

- HVAC System:: Adjusts heating, ventilation, and air conditioning based on temperature and humidity data by using LED's for demo actuation.
- Automatic Doors: Open or close based on occupancy data from the Ultrasonic sensor by using a relay.
- LEDs: Indicate status or control lighting.

#### 2.1.2 Connectivity Layer

The Connectivity Layer is responsible for data acquisition, storage, and real-time updates. It ensures that the data collected from the Sensor Layer is continuously monitored and stored for analysis.

- Real-Time Collection and Aggregation: IoT sensors gather data on temperature, humidity, light levels, and occupancy status continuously. This data is aggregated for logging and for future use cases where we could also run machine learning models to perform predictive analysis on various factors.
- Data Transmission: Utilizes MQTT for efficient, low-latency communication between IoT devices and the central controller, ensuring prompt data transmission.
- Data Storage(Future scope): A time-series database designed for highperformance handling of time-stamped data, intended for future implementation to store historical sensor data.
- Real-Time Updates: Supports uninterrupted monitoring of environmental conditions with instant data updates. With Event-Driven Update, it triggers immediate actions or alerts based on predefined conditions or thresholds.
- Data Flow Management: Node-RED Integration: Manages data flow within the system using a visual programming interface, automating workflows and routing data to appropriate subsystems for storage, analysis, or action.

#### 2.1.3 Intelligence Layer

The Reasoning Layer is responsible for interpreting sensor data, generating actionable insights, and executing control actions to maintain optimal environmental conditions in the office space. This layer leverages AI planning, PDDL (Planning Domain Definition Language), and real-time feedback to ensure efficient and effective decision-making.

- AI Planner: Analyzes sensor data to determine necessary actions for environmental control.
- **Data Processing:** Defines planning logic for scenarios like temperature, humidity, lighting, and noise management.
- Feedback Loop: Monitors and adjusts control actions as needed also refining decision making by learning from past actions.
- Future Integration: Future integration of InfluxDB and Grafana for data visualization and analysis. This time series data could be used as training data in the machine learning models to predict the maintenance and would be used for system optimization.

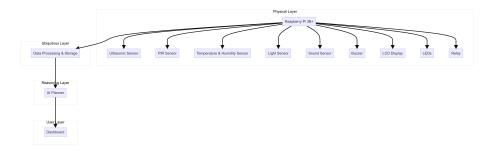


Figure 1: System Architecture

#### 2.1.4 Interaction Layer

The User Layer provides an interface for facility managers, office staff, and other stakeholders to interact with the IWMS. This layer focuses on usability, accessibility, and providing actionable insights to the users.

# 3 Hardware Components

The Intelligent Workspace Management System (IWMS) utilizes a variety of hardware components to monitor environmental conditions, execute control actions, and facilitate communication between system elements. This section provides an overview of the key hardware components used in the IWMS.

## 3.1 Raspberry Pi 3B+

The Raspberry Pi 3B+ serves as the central controller for the IWMS, responsible for data acquisition, processing, and actuator control. It connects various sensors and actuators, ensuring seamless data flow and system operation.

#### • Technical Specifications:

- Quad-core 64-bit Cortex-A53 (ARMv8) running at 1.4GHz.
- 1GB LPDDR2 SDRAM.
- Gigabit Ethernet over USB 2.0 (maximum throughput 300 Mbps).
- 2.4GHz and 5GHz IEEE 802.11.b/g/n/ac wireless LAN.
- Micro SD port for loading the operating system and storing data.
- Bluetooth 4.2, BLE.

## 3.2 Grove Pi+

The Grove Pi+ is an interface board that connects sensors and actuators to the Raspberry Pi, simplifying hardware integration and ensuring reliable data communication.

#### • Features:

- 7 digital ports.
- 3 analog Ports.
- 3 I2C ports.
- 1 Serial port connect to GrovePi.
- 1 Serial port connect to Raspberry Pi.
- Grove header Vcc output Voltage: 5Vdc.
- MCU used is ATMEGA328P.

## 3.3 Sensors and Actuators

#### • Ultrasonic Sensor:

- Measures distance for occupancy detection.
- Operating voltage: 3.2-5.2V.
- Measuring range: 2-350cm.
- Measurement angle: 15 degrees.

#### • PIR Sensor:

- Detects motion to monitor occupancy.
- Operating Voltage: 3V-5V.
- Measuring Range: 0.1-6m.
- Detecting Angle: 120 degrees.

## • Temperature and Humidity Sensor (DHT11):

- Measures ambient temperature and humidity.
- VCC: 3.3-5V.
- Temperature Range: 0-50 °C.
- Humidity Range: 20

## • Light Sensor:

- Measures ambient light intensity.
- Operating voltage: 3-5V.
- Response time: 20-30 milliseconds.

### • Sound Sensor:

- Measures noise levels for safety monitoring.
- Operating Voltage: 3.3V/5V.

- Sound Output: 85dB.

#### • LEDs:

Indicate status or control lighting.

- Colors: Red, Blue.

- Operating Voltage: 3.3V/5V.

#### • Relay:

- Controls high voltage circuits.

- Operating Voltage: 5V.

- Max Switching Voltage: 250VAC/30VDC.

- Max Switching Current: 5A.

## 4 Software Implementation

The software implementation of the Intelligent Workspace Management System (IWMS) is critical for integrating hardware components, regulating data flow, analysing information, and allowing user interaction. This section describes the essential software components and their responsibilities inside the IWMS.

## 4.1 AI Planning

AI planning is important in IWMS because it makes decisions based on acquired data in order to maintain ideal workspace conditions. The system use Planning Domain Definition Language (PDDL) to create domain and problem descriptions, enabling the AI planner to produce actionable plans.

## 4.2 Workflow of AI Plan Execution

- Plan Generation: AI planning algorithms use real-time sensor data to create plans. These plans establish precise tasks depending on existing environmental circumstances and predetermined goals.
- Plan Representation: Plans are represented with the Planning Domain Definition Language (PDDL). Each plan consists of a series of activities that must be completed in order to accomplish the intended results, such as modifying HVAC settings or managing lighting.
- Action Triggering: Once a plan is created, the system initiates activities in accordance to the plan's directions. For example, if the temperature rises over a comfortable level, the HVAC system is triggered, adjusting the temperature settings accordingly.

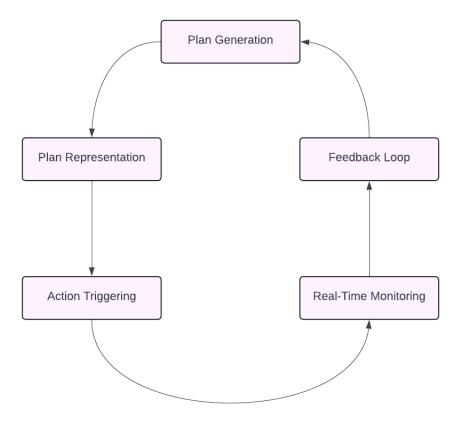


Figure 2: AI Plan Execution

- Real-Time Monitoring: Throughout the execution phase, the system continually checks sensor data to ensure that the environment meets the plan's objectives. This permits real-time adaptations to changing conditions.
- Feedback Loop: AI Plan Execution incorporates a feedback loop mechanism to assess the effectiveness of executed actions. Feedback from sensors and user inputs informs subsequent planning iterations, allowing the system to learn and adapt over time.

## 4.2.1 Benefits of AI Planning

• Real-Time Responsiveness: AI planning enables immediate responses to changing environmental conditions, ensuring continuous optimization of workspace comfort and efficiency.

- Efficient Resource Management: By automating decisions based on data analysis, AI planning optimizes energy usage, reducing operational costs and environmental impact.
- Enhanced User Experience: Consistently maintaining optimal conditions enhances user comfort and productivity, contributing to a positive work environment.

#### 4.2.2 Future Enhancements

- Predictive Analytics: Integrating machine learning algorithms to predict future environmental changes and proactively adjust systems.
- Adaptive Learning: Incorporating adaptive learning algorithms that improve decision-making over time based on historical data and user feedback.

## 4.3 Planning Domain Definition Language (PDDL)

PDDL is used to define the domain and problem descriptions for AI planning. It includes domain files that specify predicates and actions and problem files that outline objects, initial state, and goals.

#### 4.3.1 Domain File

The domain file contains predicates and actions for various conditions. Ex. Domain File:

#### 4.3.2 Problem File

The problem file specifies objects, initial state, and goals. Ex. Problem File:

```
(define (problem adjust_lighting)
  (:domain light_control)
```

```
(:init (low_light))
  (:goal (light_on))
)
```

# 5 Implementation

## 5.1 Working

The system collects data from sensors, processes it, and takes necessary actions. The Raspberry Pi reads sensor data and sends it to the remote system using MQTT. The remote system processes the data using AI planning and sends back commands to the Raspberry Pi for actuation.

- Data Collection: IoT sensors installed across the office continually collect real-time data on important environmental conditions. Temperature and humidity sensors monitor environmental conditions, ensuring that workplace comfort levels remain appropriate. Light sensors monitor illumination levels and change artificial lighting accordingly, boosting energy efficiency depending on natural light availability. Motion sensors detect human presence, allowing for occupancy tracking to influence space and energy management methods. Sound sensors monitor noise levels to provide a productive and comfortable working environment, sending alarms if noise levels exceed specified limits.
- Data Transmission and Processing: The collected sensor data is centrally pooled for consistent processing and analysis. The MQTT (Message Queuing Telemetry Transport) protocol is used to provide efficient and low-latency communication between IoT devices and a central server. This means that sensor data such as temperature, humidity, light levels, occupancy status, and sound levels are immediately communicated to a remote system for additional analysis and monitoring. MQTT's resilience enables dependable data transfer over the network, allowing for real-time decision-making and system responsiveness.
- AI Planning and Control: AI planning is critical to improving operational efficiency in the smart workplace setting. Advanced algorithms use real-time sensor data to carry out precise control operations. Light control algorithms, for example, alter artificial lighting settings in response to ambient light intensity data, guaranteeing ideal illumination while consuming the least amount of energy. Temperature and humidity control algorithms adjust HVAC settings in reaction to environmental changes, ensuring pleasant interior conditions. Occupancy-based activities, such as automatic door access control, are organised using motion sensor data to improve convenience and security.

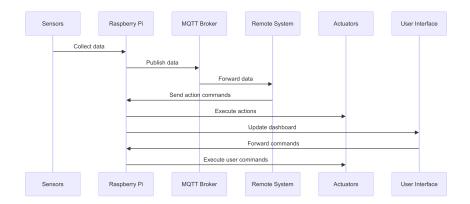


Figure 3: Control Flow Diagram

- Data Storage and Visualization: Sensor data is recorded locally in CSV format, allowing for historical analysis and system validation. InfluxDB, a time-series database, is used to store and manage time-stamped sensor data in preparation for the future use of visualisation tools such as Grafana. This database design guarantees that data is stored and retrieved efficiently, allowing for trend analysis and decision-making. Visualisation technologies offer real-time monitoring of sensor data patterns, giving stakeholders valuable insights into office dynamics and system performance.
- User Interaction and Interface: Users interact primarily through a user-friendly dashboard experience built using React.js. The dashboard provides real-time sensor data and system status updates in an understandable format. Users may see historical data trends, change system settings, and get alerts or notifications about crucial occurrences. The interface improves the user experience by offering extensive insights on workplace circumstances, allowing facility management and operational teams to make proactive decisions.

## 5.2 Local Planning

Local planning is implemented for time-critical tasks that require immediate action.

### 5.2.1 Workflow of Local Planning

- **Detection:**Sensor (ultrasonic) detects changes or events that require immediate action.
- **Processing:** The Raspberry Pi processes this data locally to determine the appropriate response.

• Action: The system executes the necessary action of opening the door.

## 6 Automation

Automation in the smart office system optimises processes by using AI, IoT, and machine learning to simplify jobs, increase productivity, and improve user experience. It automates common tasks like HVAC scheduling based on occupancy and environmental data, changes lighting dynamically to save energy, and includes smart access control for added security. Automated processes boost operational efficiency by anticipating maintenance and inventory needs, whilst personalised settings adapt to individual preferences, encouraging a productive and responsive office atmosphere.

## 7 Conclusion

Our Intelligent Workspace Management System has successfully implemented IoT technology to improve workplace productivity and comfort. We succeeded in managing environmental conditions by seamlessly combining sensors and actuators with AI-driven decision-making. MQTT plays a critical role in assuring real-time data transfer, as well as continuous monitoring and control.

The introduction of AI planning has automated HVAC and lighting modifications, increasing energy efficiency and user comfort in the workplace. Future prospects include incorporating improved sensors, using 5G for quicker data transfer, and deploying edge computing to improve data processing capabilities.

In conclusion, our solution offers a big step forward in intelligent workplace management, leveraging technology to improve productivity and user experience while encouraging sustainability.

#### 7.1 Future Work

The future of intelligent workspace systems seems promising in various areas. Advances in AI planning will allow for more advanced environmental optimizations based on deep learning insights from sensor data. These enhancements will customise lighting, HVAC, and workplace arrangements to meet real-time demands, increasing both comfort and efficiency. The integration of modern sensors will broaden monitoring capabilities to include air quality, noise levels, and biometrics, offering a complete picture of workplace circumstances. Edge computing will speed up reaction times by processing data locally, improving system stability and responsiveness.

The introduction of 5G technology will transform networking, allowing for seamless IoT device integration and real-time data exchanges. This will enable creative workplace applications such as augmented reality for better work experiences and improved remote collaboration capabilities. Sustainability will be a prominent focus, with sensor data used to optimise energy consumption and promote environmentally friendly habits. Robust cybersecurity measures

will be important in guaranteeing data protection and compliance with privacy requirements as digital connection grows.

In essence, future smart office systems will have adaptive intelligence, increased connection, sustainability, and improved user experiences, revolutionising how businesses run and grow in the digital age.

## 7.2 References

- J. Smith and A. Brown, "IoT-based Smart Office System for Environmental Control and Energy Efficiency," IEEE Internet of Things Journal, vol. 8, no. 12, pp. 9478-9488, 2021. doi: 10.1109/JIOT.2021.3110546.
- X. Li, Y. Zhang, and L. Wang, "Intelligent Management System for Office Buildings Based on IoT," in 2019 IEEE International Conference on Mechatronics and Automation (ICMA), 2019, pp. 1392-1397. doi: 10.1109/ICMA.2019.8816404.
- S. Park, J. Lee, and S. Kim, "IoT-Based Smart Office System for Environmental Monitoring and Control," in 2017 International Conference on Information Networking (ICOIN), 2017, pp. 171-176. doi: 10.1109/ICOIN.2017.7899556.
- C. Lee, H. Kim, and H. Park, "AI-Based Smart Office System for Energy Efficiency and User Comfort," Sensors, vol. 20, no. 10, article 2923, 2020. doi: 10.3390/s20102923.
- Y. Zheng and Z. Jiang, "Intelligent Workspace Management System with IoT and AI Technologies," in 2020 39th Chinese Control Conference (CCC), 2020, pp. 4395-4400. doi: 10.23919/CCC49531.2020.9260119.