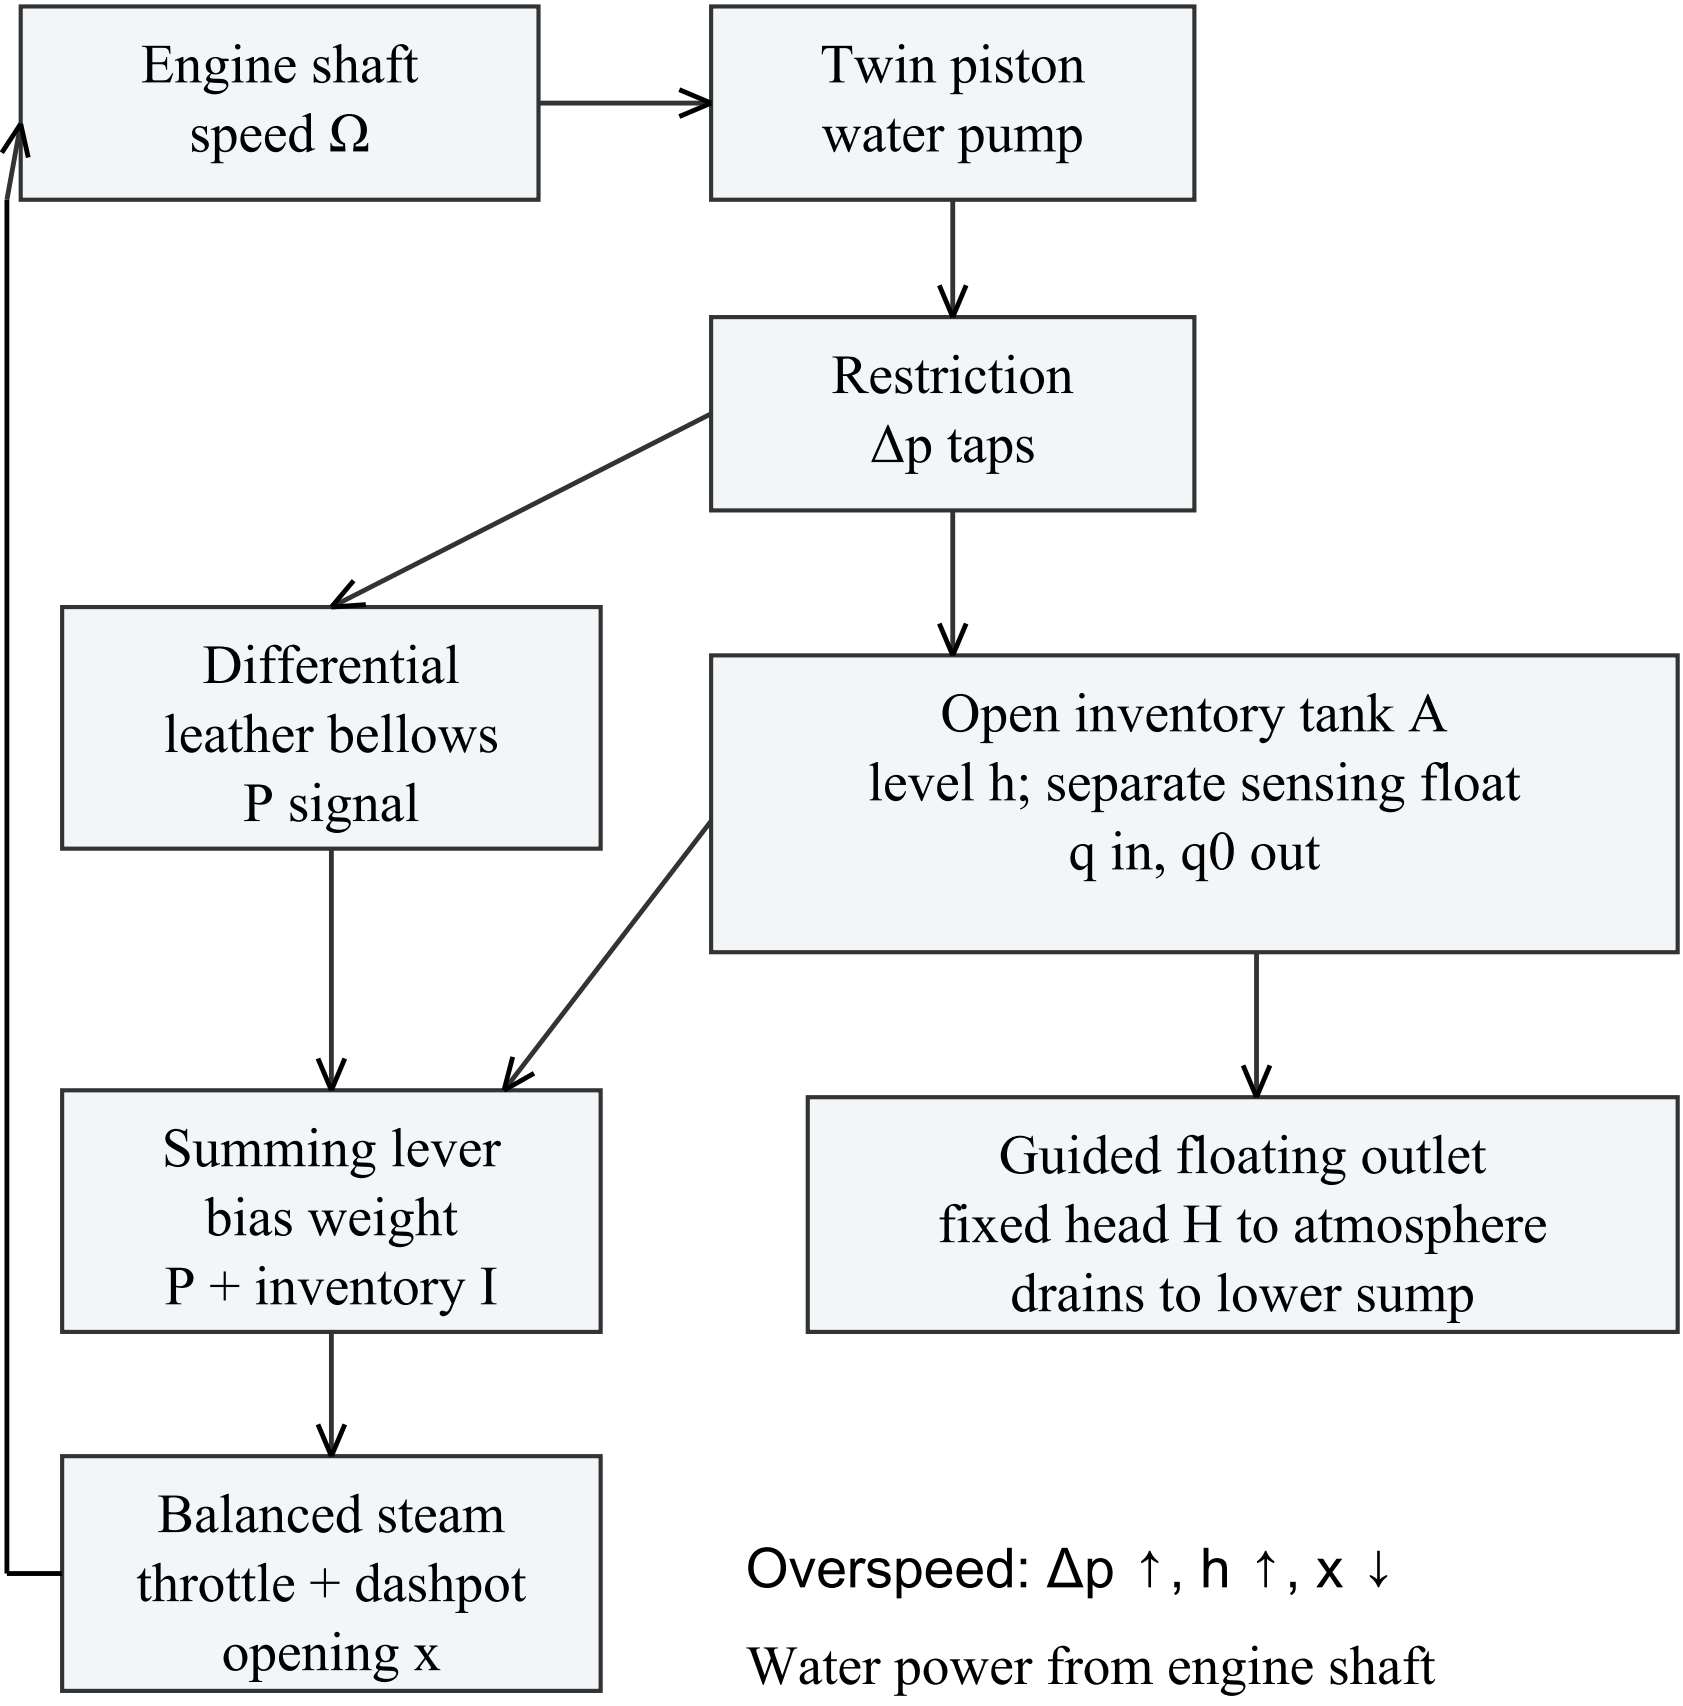

Engine shaft
speed Ω
Twin piston
water pump
Restriction
Δp taps
Differential
leather bellows
P signal
Open inventory tank A
level h; separate sensing float
q in, q0 out
Summing lever
bias weight
P + inventory I
Guided floating outlet
fixed head H to atmosphere
drains to lower sump
Balanced steam
throttle + dashpot
opening x
Overspeed: Δp ↑, h ↑, x ↓
Water power from engine shaft