

Punya Prakash,  
Business Manager,  
Sitara™ processors  
Texas Instruments

# Data concentrators: The core of energy and data management

## Introduction

Nearly 36 million smart meters were installed across the United States as of August 2012. In the European Union, smart meters continue to be deployed rapidly to meet the mandate that this technology reach 80 percent of households by 2020<sup>[1]</sup>. The technical and economic challenge of every installed meter directly communicating with utility servers makes the solution non-practical. With a large install base, it is essential to establish an automated metering infrastructure (AMI). With automated meter reading (AMR) measurement, the communication of meter data to the central billing station will be seamless. In addition to collecting energy usage information for billing, utility providers can leverage AMI to trouble-shoot and analyze any fault in the metering network.

Data concentrators are a critical node in the AMI; these aggregators are connected to several utility meters and a central utility server. This facilitates the communication of data between the meters and the energy service provider. Data concentrators, at several points

in the infrastructure, securely aggregate data from a manageable number of meters and relay the information to the centralized utility servers.

In this white paper, we discuss the smart grid AMI, focusing on the data concentrators. We will outline the role Texas Instruments (TI) Sitara™ processors play in facilitating intelligent automation of the AMI unit as demonstrated through a comprehensive system reference solution. The scalable TI processor portfolio offers an opportunity to build a platform solution that can be tailored based on the data concentrator requirements.

## Data concentrator

Advancement in smart grid technology has transformed the energy segment. With improved infrastructure, a bi-directional flow of energy and data information can be achieved. The key to optimizing this complex network of intelligent systems is automation of the core components.

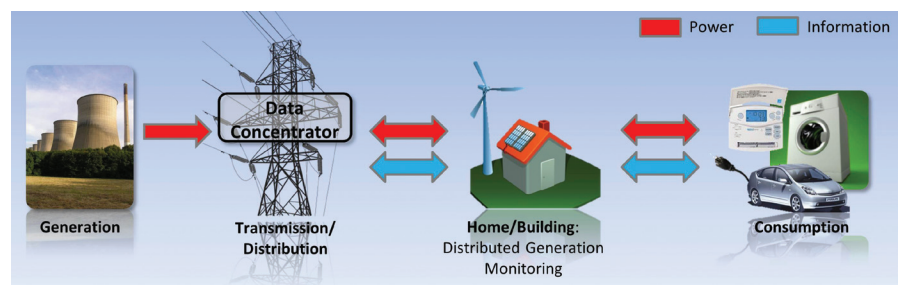


Figure 1: Smart grid infrastructure demonstrating two-way energy and data flow

The AMI is inclusive of intelligent meters that record electricity consumption at regular intervals, providing the data to the utility provider. The frequency of this data feedback ranges from an hourly feedback meter to real-time meters with a built-in two-way communication structure. These systems have the capability of recording and transmitting instantaneous information. The recorded data provides more information on the load of the various end points that are actively consuming energy.

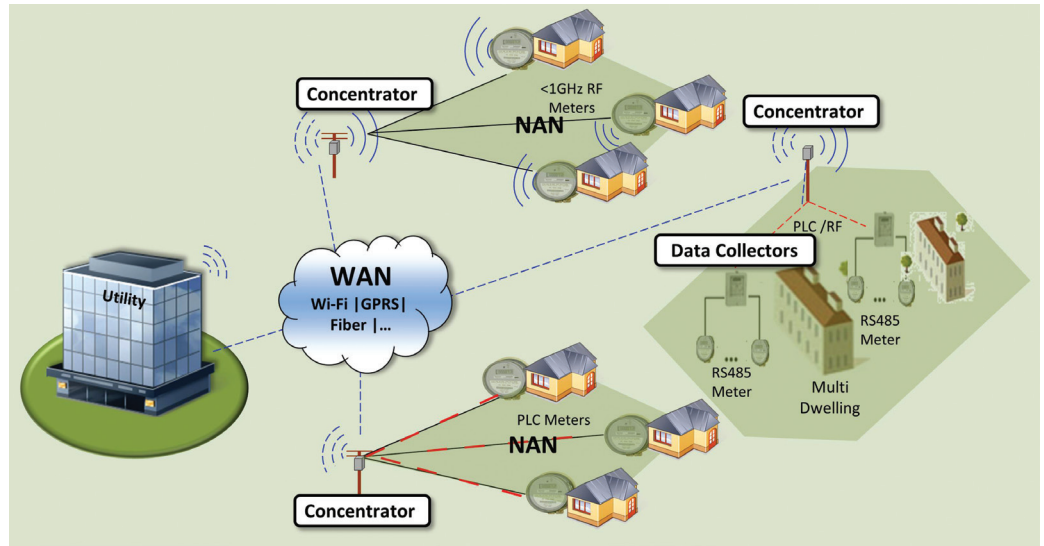


Figure 2: Typical data concentrator network

A data concentrator is the core of data and energy management in an AMI. It provides the technology to measure and collect energy usage data. The concentrator can also be programmed to analyze and communicate this information to the central utility database. Not only can the utility providers could use this information for billing services, but can improve customer relationships through enhanced consumer services such as real-time energy analysis and communication of usage information. Additional benefits of fault detection and initial diagnosis can also be achieved, further optimizing the operational cost.

There are two types of networks connecting to data concentrators:

- **NAN:** Neighborhood Area Network
- **WAN:** Wide Area Network

Data concentrators communicate information through the grid through aggregation of information from various meters. Additionally, its benefits include:

- **Smart metering** – instant read, load profile, billing information and remote management
- **Inventory management** – give utilities better visibility into its assets
- **Optimization of network** – real-time topology display, performance management and benchmarking

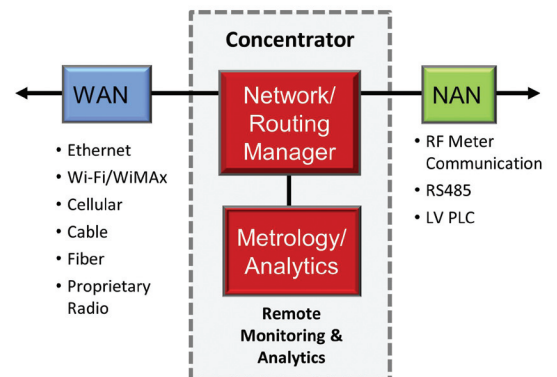


Figure 3: Data concentrator functional block diagram

There are multiple challenges in the AMI market today, specifically for data concentrator applications.

### **Multiple communication standards**

The metering installations support various communication standards in different regions. In addition to the new protocols, older communication interfaces based on RS-485 should also be considered while designing a platform solution. The key for a scalable concentrator platform is to be fully functional with meters and back-end management systems from various vendors implementing compliant technology proving **multi-vendor interoperability**.

### **Software infrastructure**

To deploy **multiple communication standards** on a single system, it is essential to have a robust software foundation. Ideally, with validated communication firmware, vendors can invest in developing applications to customize their system offering. Smart grid applications such as transformer detection and energy balancing can be developed by taking advantage of this advanced technology.

With smart meter rollouts, the abundance of energy usage information can be used by utility companies to boost customer experiences. This aggregation of information requires data- and energy-managed solutions. By improving the **data management and networking security**, utility companies can deploy applications through which consumers can have higher granularity into their energy consumption.

### **Field approval**

Field tests and approval of this technology are significantly time consuming. Using **field-proven technology** will mitigate the risk significantly improving the time to market. These outdoor installations call for systems with high integration to be built for rugged environment.

### **TI system solution**

TI's Sitara AM335x processor-based data concentrator evaluation module (EVM) addresses some of these challenges. With proven hardware and a robust software solution, these system solutions improve the time to market considerably.

Depending on the system requirements, TI offers a data concentrator EVM with various performance, cost and connectivity options. The latest Sitara AM335x processor-based TMDSDC3359 EVM aids higher network capability. TI's highly scalable AM335x processor enables expanded wired and wireless connectivity options through flexible peripherals. With frequency ranging from 300MHz to 1GHz, this pin-to-pin compatible processor provides the flexibility to also add more service nodes to the system.

The communication mode used in the system largely depends on the power infrastructure. The data concentrator unit can be based on wired or wireless communication. Power line communication (PLC) based wired communication is gaining market share, while serial or Ethernet-based systems continue to grow at a steady pace. Wireless systems are primarily based on low-power RF (IEEE 802.15.4g protocol) communication.

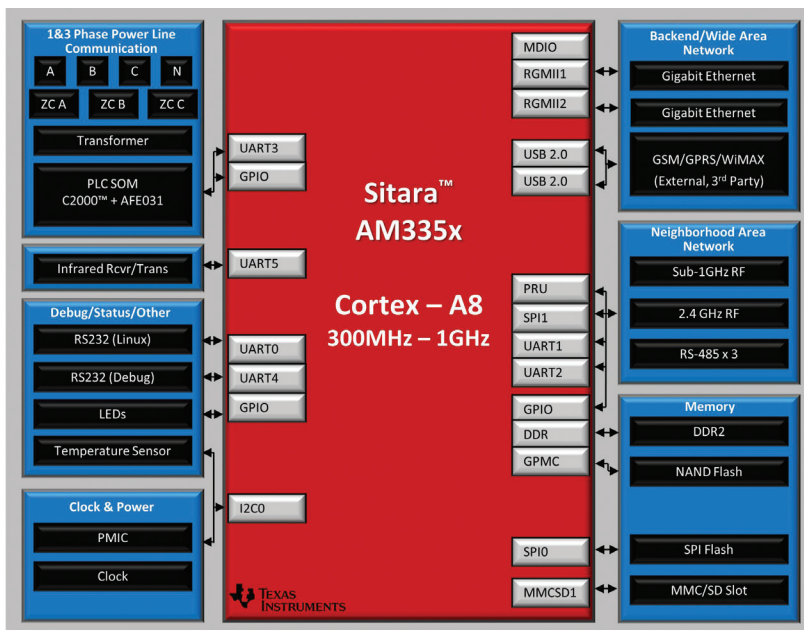


Figure 4: Texas Instruments data concentrator evaluation module

Data from the concentrator to the utility servers can be transferred via Ethernet, GSM, GPRS, WiMAX or other telecom networks. With support for DDR2/3 memory, integrated Gbit-Ethernet, CAN, MMC/SD, USB and up to eight UARTs, the TI Sitara processor supports various communication media, including RS-232, RS-485, Infrared and wireless modules.

With system-tested Linux™-based software solution, the TI system solution offers:

- Complete PHY and MAC layer software for power line communication (G3, PRIME, IEEE-1901.2)
- IPV4 / IPV6 / 6LoWPAN networking protocols
- DLMS/COSEM applications from third-party Aricent

#### Sitara™ Processor

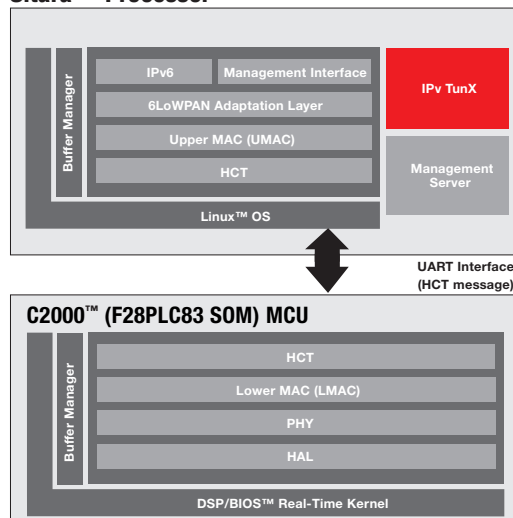


Figure 5: G3-PLC Base Node Stack from Texas Instruments

#### G3 Stack


- Sitara processor
  - ADP 6LoWPAN Bootstrapping
  - Mesh routing (LOAD)
  - Security EAP/PSK
  - Upper MAC
- C2000™ microcontroller
  - Lower MAC and Prime PHY

#### G3 DC Interfaces

- Management
- DLMS/COSEM IPv6 application

#### G3 Topology

- Maximum 2000 nodes

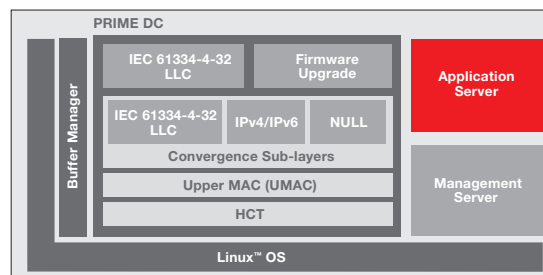**Sitara™ Processor****PRIME Stack**


- Sitara processor
  - IEC-61334-4-32 LLC
  - IEC-61334-4-32 SSCS and NUL SSCS
  - Upper MAC
- C2000 microcontroller
  - Lower MAC and PRIME PHY

**PRIME DC Interfaces**

- Management
- Application

**PRIME Topology**

- 2000 nodes
- 32 switches
- 3600 connections (Unicast and Management)

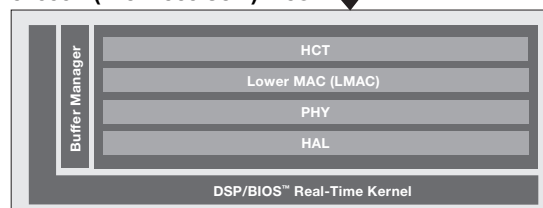**C2000™ (F28PLC83 SOM) MCU**

**Figure 6: PRIME Base Node Stack from Texas Instruments**

The new Smart Data Concentration EVM highlights the ease of using TI's broad portfolio of complementary analog. As a full TI system solution, the TMDSDC3359 EVM includes more than 20 analog components from TI's power management, interface, isolation and logic portfolios, which makes it easy for smart grid developers to integrate TI's processors, microcontrollers and connectivity solutions with these analog parts.

The reference solution also includes demo applications such as the DLMS/COSEM to help developers evaluate the system and potentially use it in the final product. This system-tested core communication software stack allows developers to customize the data concentrator designs solution and release it to market faster.

**Features and  
benefits of TI's smart  
data concentrator  
evaluation module:**

- Based on TI's Sitara AM3359 processor that provides the necessary performance to implement complex routing algorithms in the data concentrator. This enables the system to connect with more than 2,000 e-meters.
- Implementing Sitara AM335x processor or an alternative Tiva™ C Series ARM® microcontroller (MCU) provides developers a larger range of performance (80MHz to 1GHz) and cost options.
- Includes advanced hardware and software that reduce development time by up to nine months while still supporting quick connectivity to more than 2,000 smart e-meters.
- Integrated communication interfaces include two Ethernet (MAC) ports, USB and up to eight UARTs for quick and easy connectivity to other systems on the smart grid.
- Available with multiple PLC stacks for MAC and PHY layers so developers can create designs that support PLC-Lite, PRIME, G3 and IEEE-P1901.2 standards.
- DLMS/COSEM applications standard, supported by third party Aricent, pre-determines how the data concentrator will organize metrology data and send it back to the utility.

**Conclusion**

A data concentrator is the core of the AMI system and improves the overall energy and data management of the smart grid system. These systems provide the means to collect energy-utilization information and relay it back to the central utility servers. Utility companies could use this data and provide higher granularity of energy usage to its end consumers, improving the overall customer experience. With these intelligent systems, the operational efficiency of the grid can also be improved through seamless billing information and grid network fault detection.

The Sitara processor-based TI data concentrator evaluation module significantly improves the time to market through its complete system solution. Through the field-proven system solution and support for prominent grid communication standards, it addresses the primary challenges in the data concentrator market today. With TI's solution, the development time for these systems is greatly reduced, accelerating the time to market.

*For more information on TI's data concentrator evaluation module, please visit*

**[www.ti.com/dsp-arm-datacon-wp-sw](http://www.ti.com/dsp-arm-datacon-wp-sw)**.

*For more information about TI's Sitara AM335x processors, please visit*

**[www.ti.com/dsp-arm-datacon-wp-lp](http://www.ti.com/dsp-arm-datacon-wp-lp)**.

**Resource**

<sup>[1]</sup> Smart meter deployments continue to rise – U.S. Energy Information Administration:

**<http://www.eia.gov/todayinenergy/detail.cfm?id=8590>**

Important Notice: The products and services of Texas Instruments Incorporated and its subsidiaries described herein are sold subject to TI's standard terms and conditions of sale. Customers are advised to obtain the most current and complete information about TI products and services before placing orders. TI assumes no liability for applications assistance, customer's applications or product designs, software performance, or infringement of patents. The publication of information regarding any other company's products or services does not constitute TI's approval, warranty or endorsement thereof.

C2000, DSP/BIOS, Sitara and Tiva are trademarks of Texas Instruments Incorporated. All other trademarks are the property of their respective owners.



## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

### Products

Audio	<a href="http://www.ti.com/audio">www.ti.com/audio</a>
Amplifiers	<a href="http://amplifier.ti.com">amplifier.ti.com</a>
Data Converters	<a href="http://dataconverter.ti.com">dataconverter.ti.com</a>
DLP® Products	<a href="http://www.dlp.com">www.dlp.com</a>
DSP	<a href="http://dsp.ti.com">dsp.ti.com</a>
Clocks and Timers	<a href="http://www.ti.com/clocks">www.ti.com/clocks</a>
Interface	<a href="http://interface.ti.com">interface.ti.com</a>
Logic	<a href="http://logic.ti.com">logic.ti.com</a>
Power Mgmt	<a href="http://power.ti.com">power.ti.com</a>
Microcontrollers	<a href="http://microcontroller.ti.com">microcontroller.ti.com</a>
RFID	<a href="http://www.ti-rfid.com">www.ti-rfid.com</a>
OMAP Applications Processors	<a href="http://www.ti.com/omap">www.ti.com/omap</a>
Wireless Connectivity	<a href="http://www.ti.com/wirelessconnectivity">www.ti.com/wirelessconnectivity</a>

### Applications

Automotive and Transportation	<a href="http://www.ti.com/automotive">www.ti.com/automotive</a>
Communications and Telecom	<a href="http://www.ti.com/communications">www.ti.com/communications</a>
Computers and Peripherals	<a href="http://www.ti.com/computers">www.ti.com/computers</a>
Consumer Electronics	<a href="http://www.ti.com/consumer-apps">www.ti.com/consumer-apps</a>
Energy and Lighting	<a href="http://www.ti.com/energy">www.ti.com/energy</a>
Industrial	<a href="http://www.ti.com/industrial">www.ti.com/industrial</a>
Medical	<a href="http://www.ti.com/medical">www.ti.com/medical</a>
Security	<a href="http://www.ti.com/security">www.ti.com/security</a>
Space, Avionics and Defense	<a href="http://www.ti.com/space-avionics-defense">www.ti.com/space-avionics-defense</a>
Video and Imaging	<a href="http://www.ti.com/video">www.ti.com/video</a>

### TI E2E Community

[e2e.ti.com](http://e2e.ti.com)