


Feature Flag & Dynamic Config Manager (Problem Statement #43)

UML Component Diagram - Client-Server Architecture

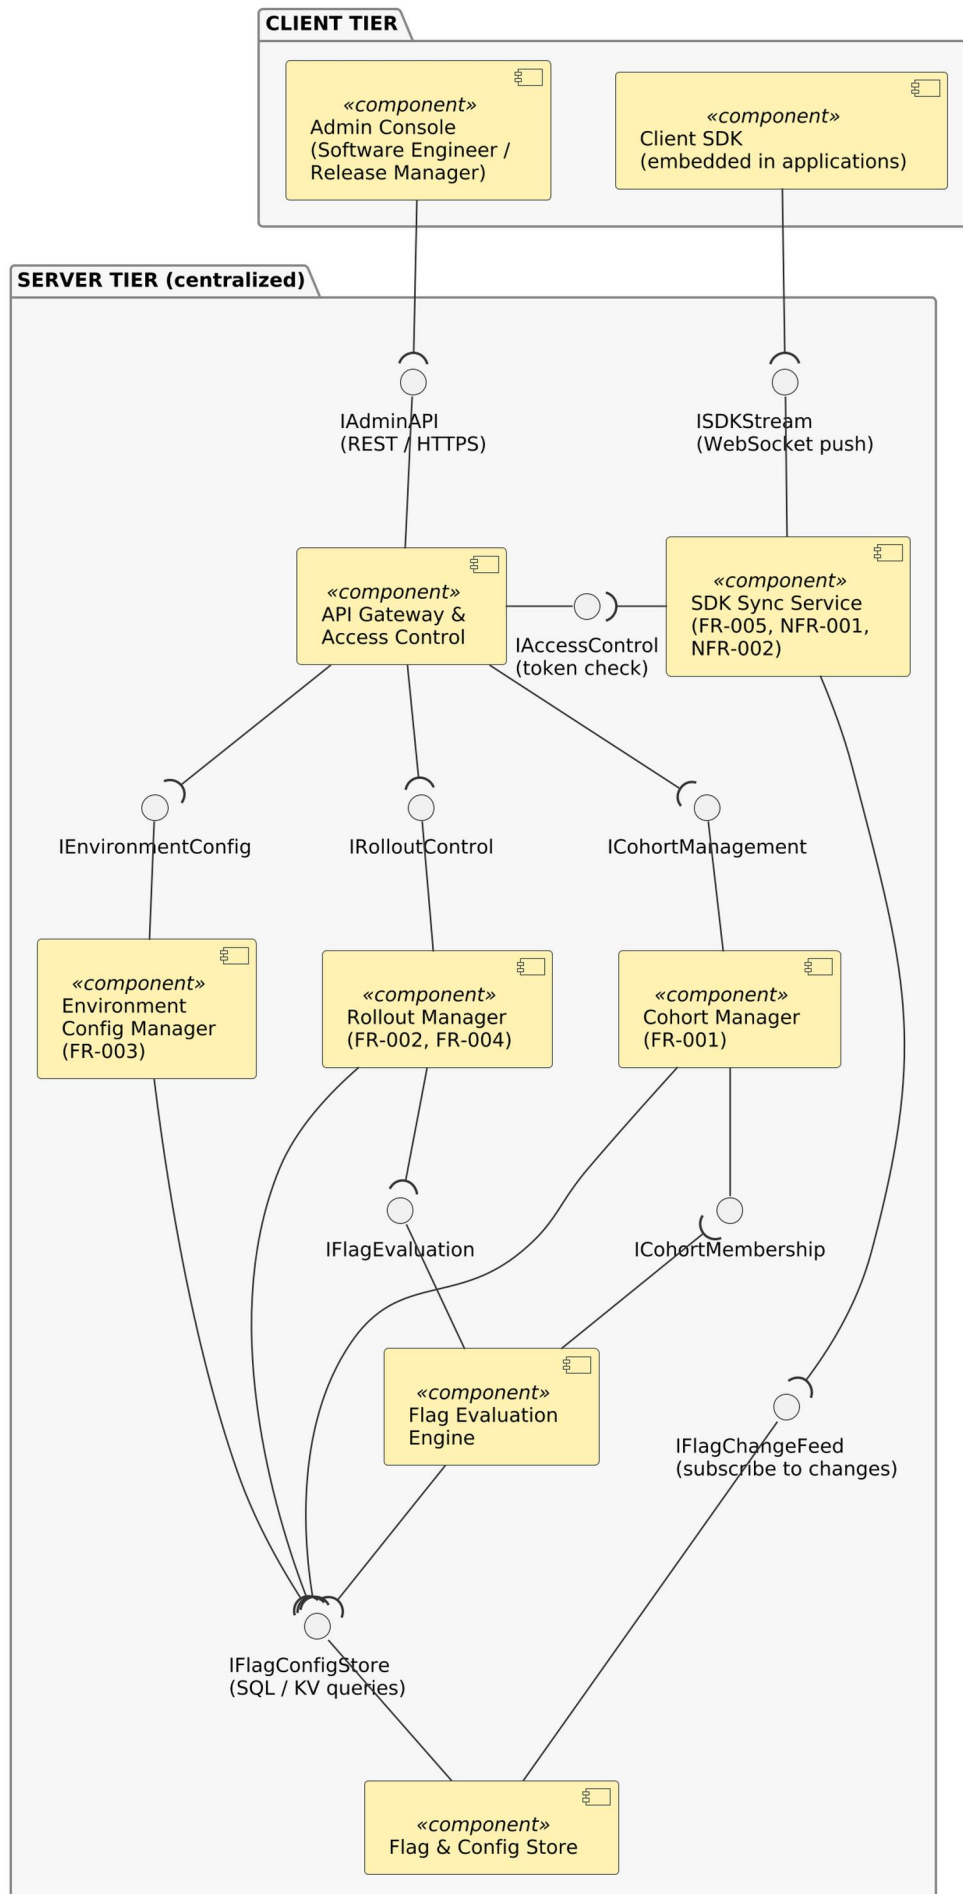

Notation: ball (-O) = provided interface | socket (-/) = required interface
 Assembly connector = socket joined to ball | FR/NFR IDs refer to Lab 1 requirements