Project*

First Saved	Tuesday, August 29, 2023
Last Saved	Tuesday, August 29, 2023
Product Version	2022 R2
Save Project Before Solution	No
Save Project After Solution	No

Contents

Units

TABLE 1

Unit System	Metric (mm, kg, N, s, mV, mA) Degrees rad/s Celsius
Angle	Degrees
Rotational Velocity	rad/s
Temperature	Celsius

Model (A4)

TABLE 2
Model (A4) > Geometry Imports

Object Name	Geometry Imports
State	Solved
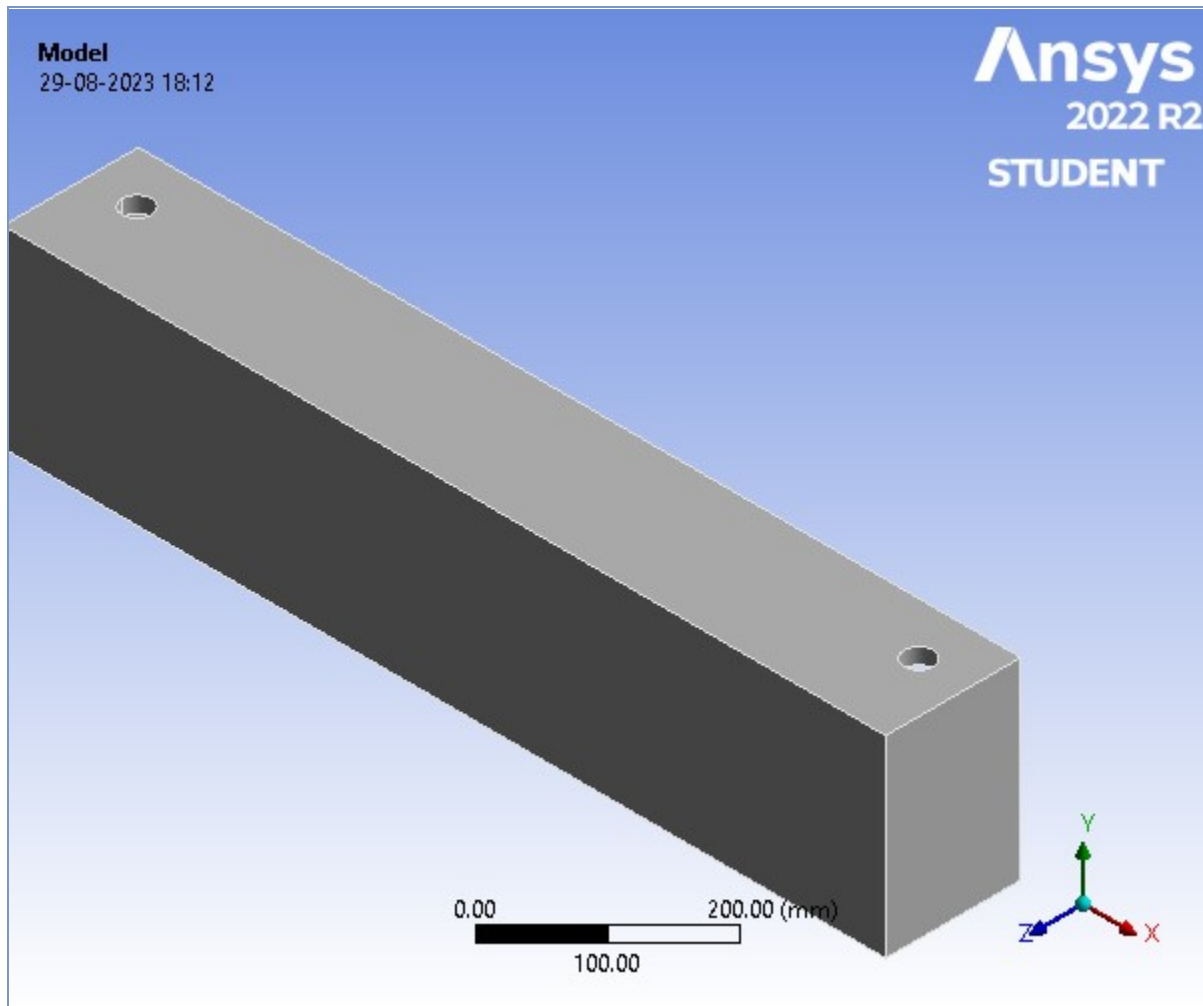
TABLE 3
Model (A4) > Geometry Imports > Geometry Import (A3)

Object Name	Geometry Import (A3)
State	Solved
Definition	
Source	C:\Users\HP\Downloads\Chassie_simplified v0[1].step
Type	Step
Basic Geometry Options	
Solid Bodies	Yes

Surface Bodies	Yes
Line Bodies	No
Parameters	Independent
Parameter Key	ANS;DS
Attributes	No
Named Selections	No
Material Properties	No
Advanced Geometry Options	
Use Associativity	Yes
Coordinate Systems	No
Reader Mode Saves Updated File	No
Use Instances	Yes
Smart CAD Update	Yes
Compare Parts On Update	No
Analysis Type	3-D
Mixed Import Resolution	None
Import Facet Quality	Source
Clean Bodies On Import	No
Stitch Surfaces On Import	None
Decompose Disjoint Geometry	Yes
Enclosure and Symmetry Processing	Yes

Geometry

TABLE 4
Model (A4) > Geometry

Object Name	*Geometry*
State	Fully Defined
Definition	
Source	C:\Users\HP\Downloads\Chassie_simplified v0[1].step
Type	Step
Length Unit	Millimeters
Element Control	Program Controlled
Display Style	Body Color
Bounding Box	
Length X	943.25 mm
Length Y	205.8 mm
Length Z	144.49 mm
Properties	
Volume	8.1476e+006 mm³
Mass	22.569 kg
Scale Factor Value	1.
Statistics	
Bodies	1
Active Bodies	1
Nodes	42084
Elements	24293
Mesh Metric	None
Update Options	
Assign Default Material	No
Basic Geometry Options	
Solid Bodies	Yes

Surface Bodies	Yes
Line Bodies	No
Parameters	Independent
Parameter Key	ANS;DS
Attributes	No
Named Selections	No
Material Properties	No
Advanced Geometry Options	
Use Associativity	Yes
Coordinate Systems	No
Reader Mode Saves Updated File	No
Use Instances	Yes
Smart CAD Update	Yes
Compare Parts On Update	No
Analysis Type	3-D
Mixed Import Resolution	None
Import Facet Quality	Source
Clean Bodies On Import	No
Stitch Surfaces On Import	None
Decompose Disjoint Geometry	Yes
Enclosure and Symmetry Processing	Yes

TABLE 5
Model (A4) > Geometry > Parts

Object Name	*Chassie_simplified v0[1]-FreeParts|Body1*
State	Meshed
Graphics Properties	
Visible	Yes
Transparency	1
Definition	
Suppressed	No
Stiffness Behavior	Flexible
Coordinate System	Default Coordinate System
Reference Temperature	By Environment
Treatment	None
Material	
Assignment	Aluminum Alloy
Nonlinear Effects	Yes
Thermal Strain Effects	Yes
Bounding Box	
Length X	943.25 mm
Length Y	205.8 mm
Length Z	144.49 mm
Properties	
Volume	8.1476e+006 mm³
Mass	22.569 kg
Centroid X	471.63 mm
Centroid Y	102.9 mm
Centroid Z	93.244 mm
Moment of Inertia Ip1	1.8503e+005 kg·mm²
Moment of Inertia Ip2	1.9972e+006 kg·mm²
Moment of Inertia Ip3	2.0885e+006 kg·mm²

Statistics	
Nodes	42084
Elements	24293
Mesh Metric	None

TABLE 6
Model (A4) > Materials

Object Name	*Materials*
State	Fully Defined
Statistics	
Materials	1
Material Assignments	0

Coordinate Systems

TABLE 7
Model (A4) > Coordinate Systems > Coordinate System

Object Name	*Global Coordinate System*
State	Fully Defined
Definition	
Type	Cartesian
Coordinate System ID	0.
Origin	
Origin X	0. mm
Origin Y	0. mm
Origin Z	0. mm
Directional Vectors	
X Axis Data	[1. 0. 0.]
Y Axis Data	[0. 1. 0.]
Z Axis Data	[0. 0. 1.]

Mesh

TABLE 8
Model (A4) > Mesh

Object Name	*Mesh*
State	Solved
Display	
Display Style	Use Geometry Setting
Defaults	
Physics Preference	Mechanical
Element Order	Program Controlled
Element Size	Default
Sizing	
Use Adaptive Sizing	Yes
Resolution	Default (2)
Mesh Defeaturing	Yes
Defeature Size	Default
Transition	Fast
Span Angle Center	Coarse
Initial Size Seed	Assembly
Bounding Box Diagonal	976.19 mm

Average Surface Area	66413 mm²
Minimum Edge Length	17.15 mm
Quality	
Check Mesh Quality	Yes, Errors
Error Limits	Aggressive Mechanical
Target Element Quality	Default (5.e-002)
Smoothing	Medium
Mesh Metric	None
Inflation	
Use Automatic Inflation	None
Inflation Option	Smooth Transition
Transition Ratio	0.272
Maximum Layers	5
Growth Rate	1.2
Inflation Algorithm	Pre
View Advanced Options	No
Advanced	
Number of CPUs for Parallel Part Meshing	Program Controlled
Straight Sided Elements	No
Rigid Body Behavior	Dimensionally Reduced
Triangle Surface Mesher	Program Controlled
Topology Checking	Yes
Pinch Tolerance	Please Define
Generate Pinch on Refresh	No
Statistics	
Nodes	42084
Elements	24293

TABLE 9
Model (A4) > Mesh > Mesh Controls

Object Name	*Patch Conforming Method*	*Body Sizing*
State	Fully Defined	
Scope		
Scoping Method	Geometry Selection	
Geometry	1 Body	
Definition		
Suppressed	No	
Method	Tetrahedrons	
Algorithm	Patch Conforming	
Element Order	Use Global Setting	
Type		Element Size
Element Size		15.0 mm
Advanced		
Defeature Size		Default
Behavior		Soft

FIGURE 1
Model (A4) > Mesh > Figure
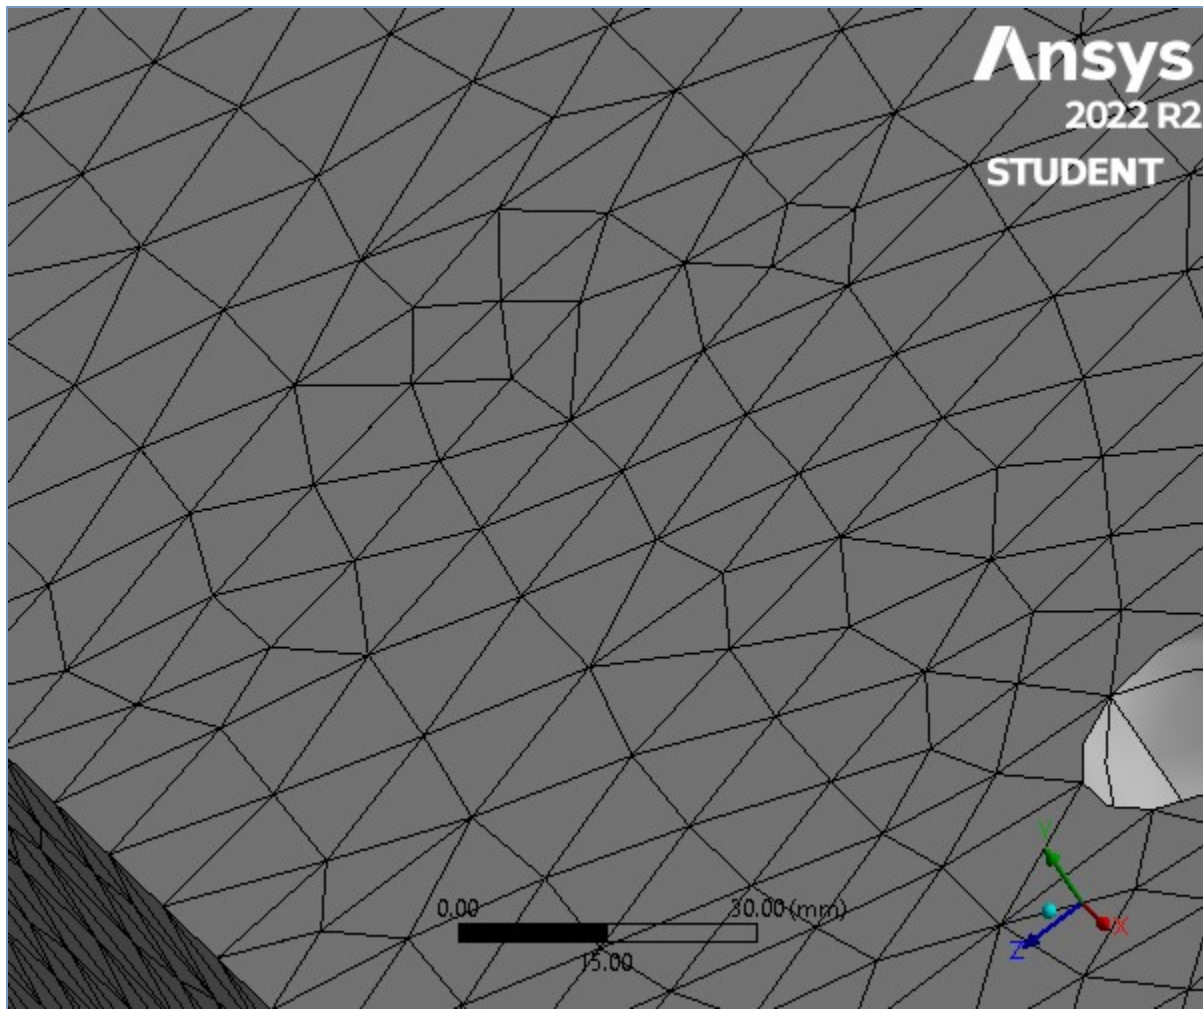
Static Structural (A5)

TABLE 10
Model (A4) > Analysis

Object Name	Static Structural (A5)
State	Solved
Definition	
Physics Type	Structural
Analysis Type	Static Structural
Solver Target	Mechanical APDL
Options	
Environment Temperature	22. °C
Generate Input Only	No

TABLE 11
Model (A4) > Static Structural (A5) > Analysis Settings

Object Name	Analysis Settings
State	Fully Defined
Step Controls	
Number Of Steps	1.
Current Step Number	1.
Step End Time	1. s

Auto Time Stepping	Program Controlled
Solver Controls	
Solver Type	Program Controlled
Weak Springs	Off
Solver Pivot Checking	Program Controlled
Large Deflection	Off
Inertia Relief	Off
Quasi-Static Solution	Off
Rotordynamics Controls	
Coriolis Effect	Off
Restart Controls	
Generate Restart Points	Program Controlled
Retain Files After Full Solve	No
Combine Restart Files	Program Controlled
Nonlinear Controls	
Newton-Raphson Option	Program Controlled
Force Convergence	Program Controlled
Moment Convergence	Program Controlled
Displacement Convergence	Program Controlled
Rotation Convergence	Program Controlled
Line Search	Program Controlled
Stabilization	Program Controlled
Advanced	
Inverse Option	No
Contact Split (DMP)	Off
Output Controls	
Stress	Yes
Surface Stress	No
Back Stress	No
Strain	Yes
Contact Data	Yes
Nonlinear Data	No
Nodal Forces	No
Volume and Energy	Yes
Euler Angles	Yes
General Miscellaneous	No
Contact Miscellaneous	No
Store Results At	All Time Points
Result File Compression	Program Controlled
Analysis Data Management	
Solver Files Directory	C:\Users\HP\AppData\Local\Temp\WB_HP_8532_4\wbnew_files\dp0 \SYS\MECH\
Future Analysis	None
Scratch Solver Files Directory	
Save MAPDL db	No
Contact Summary	Program Controlled
Delete Unneeded Files	Yes
Nonlinear Solution	No
Solver Units	Active System
Solver Unit System	nmm

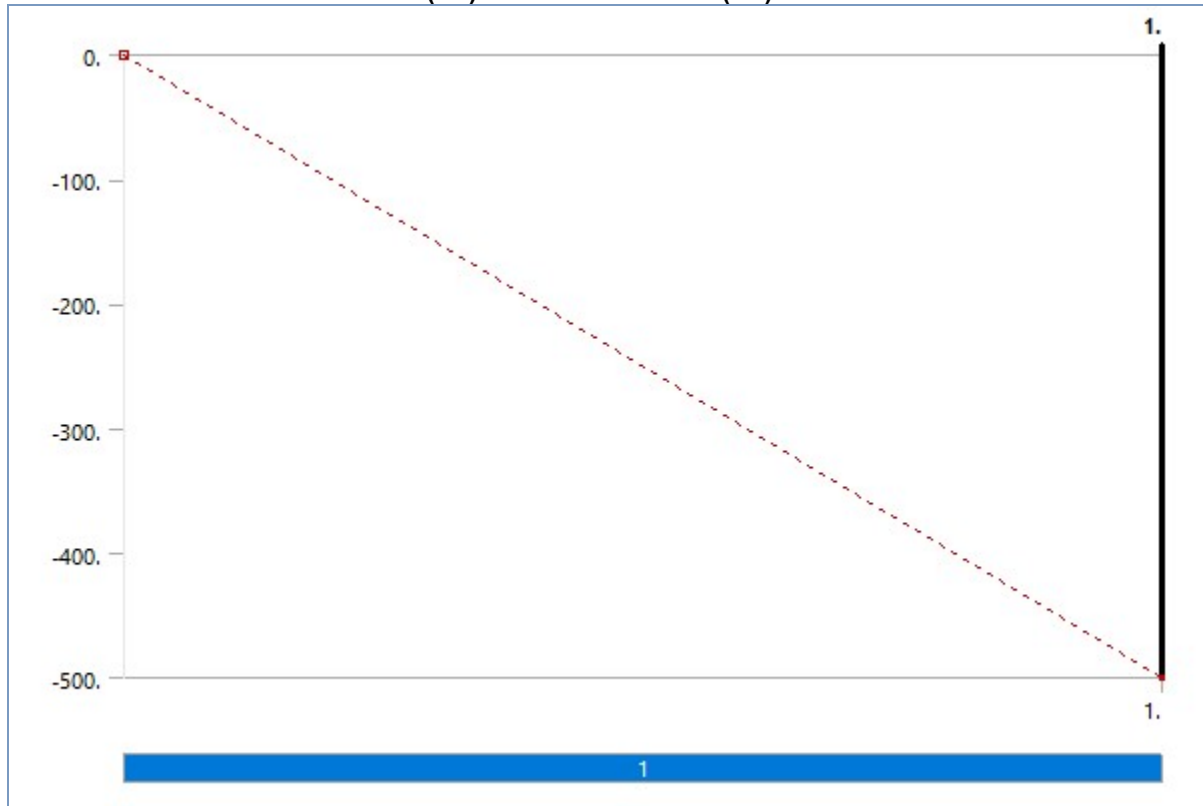**TABLE 12**

Model (A4) > Static Structural (A5) > Accelerations

Object Name	Standard Earth Gravity
State	Fully Defined
Scope	
Geometry	All Bodies
Definition	
Coordinate System	Global Coordinate System
X Component	0. mm/s² (ramped)
Y Component	0. mm/s² (ramped)
Z Component	-9806.6 mm/s² (ramped)
Suppressed	No
Direction	-Z Direction

FIGURE 2
Model (A4) > Static Structural (A5) > Standard Earth Gravity
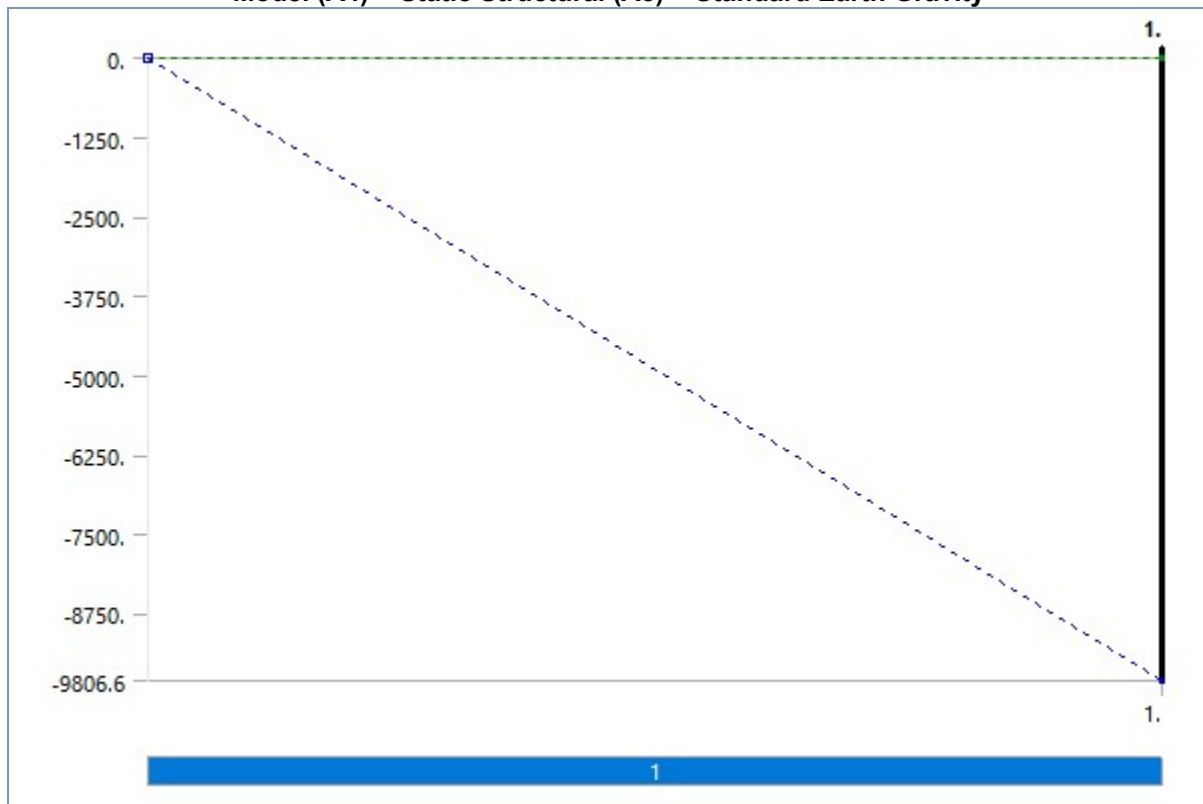
TABLE 13
Model (A4) > Static Structural (A5) > Loads

Object Name	Force	Fixed Support
State	Fully Defined	
Scope		
Scoping Method	Geometry Selection	
Geometry	1 Face	
Definition		
Type	Force	Fixed Support
Define By	Vector	
Applied By	Surface Effect	
Magnitude	-500. N (ramped)	
Direction	Defined	

Suppressed	No

FIGURE 3
Model (A4) > Static Structural (A5) > Force

Solution (A6)

TABLE 14
Model (A4) > Static Structural (A5) > Solution

Object Name	Solution (A6)
State	Solved
Adaptive Mesh Refinement	
Max Refinement Loops	1.
Refinement Depth	2.
Information	
Status	Done
MAPDL Elapsed Time	11. s
MAPDL Memory Used	755. MB
MAPDL Result File Size	15.75 MB
Post Processing	
Beam Section Results	No
On Demand Stress/Strain	No

TABLE 15
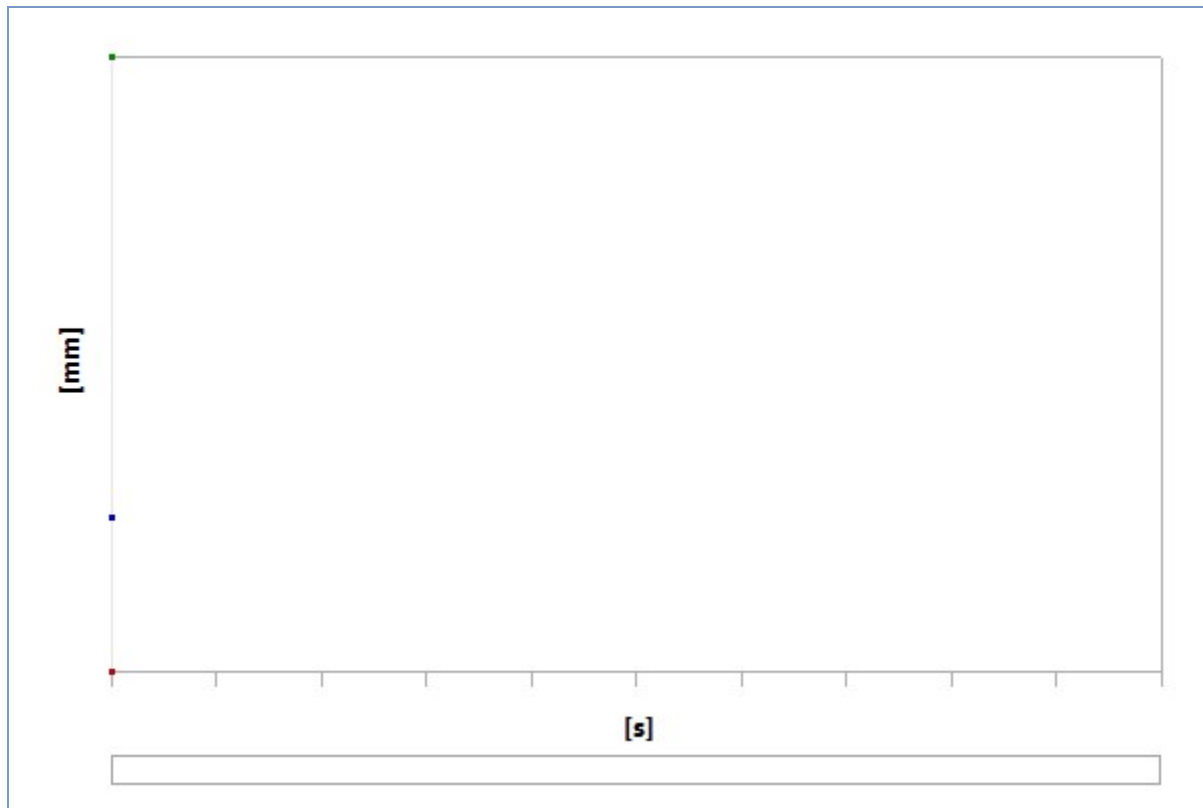**Model (A4) > Static Structural (A5) > Solution (A6) > Solution Information**

Object Name	Solution Information
State	Solved
Solution Information	
Solution Output	Solver Output

Newton-Raphson Residuals	0
Identify Element Violations	0
Update Interval	2.5 s
Display Points	All
FE Connection Visibility	
Activate Visibility	Yes
Display	All FE Connectors
Draw Connections Attached To	All Nodes
Line Color	Connection Type
Visible on Results	No
Line Thickness	Single
Display Type	Lines

TABLE 16
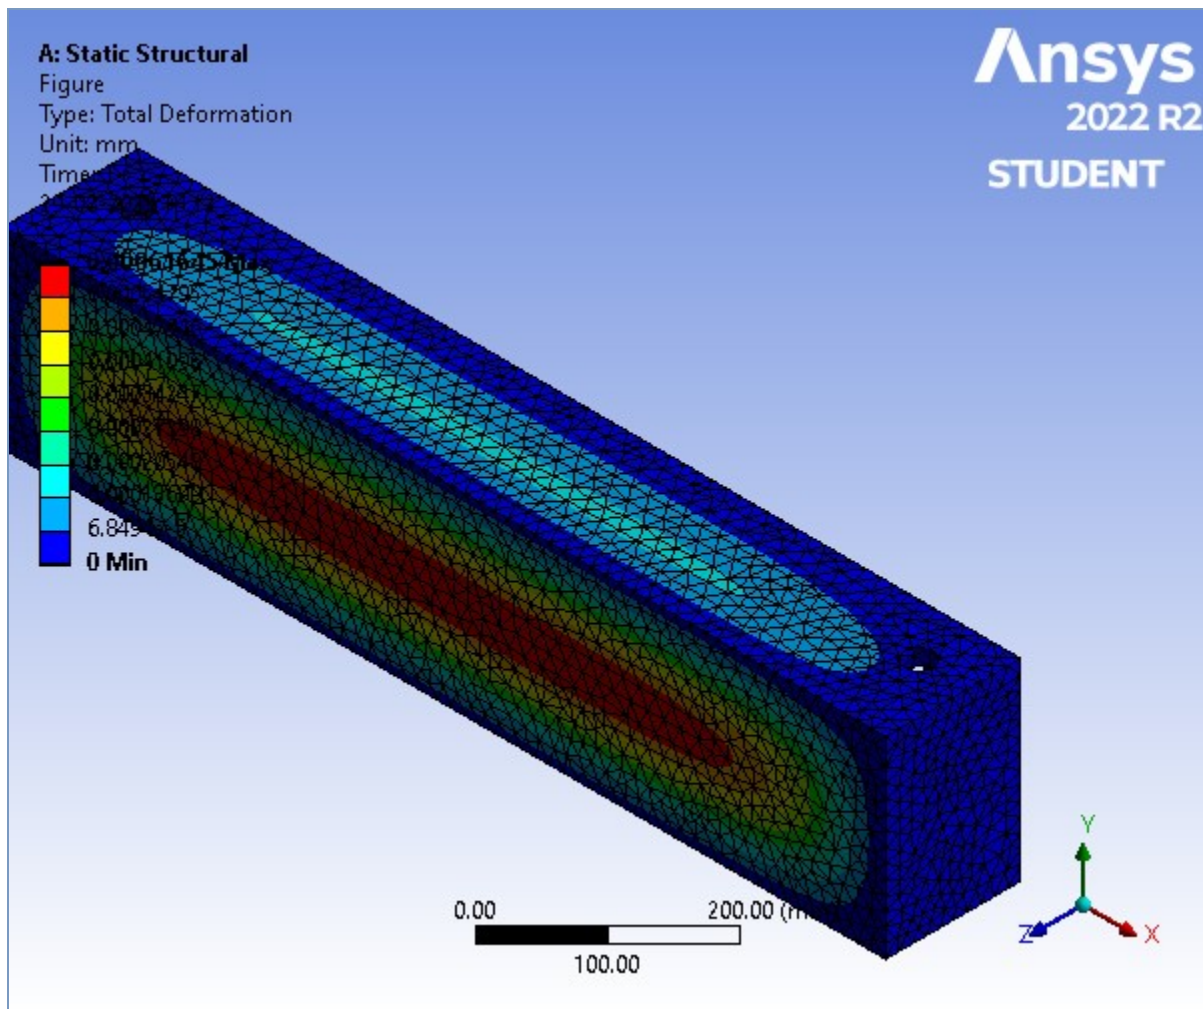**Model (A4) > Static Structural (A5) > Solution (A6) > Results**

Object Name	Total Deformation	Equivalent Elastic Strain
State	Solved	
Scope		
Scoping Method	Geometry Selection	
Geometry	All Bodies	
Definition		
Type	Total Deformation	Equivalent Elastic Strain
By	Time	
Display Time	Last	
Calculate Time History	Yes	
Identifier		
Suppressed	No	
Results		
Minimum	0. mm	2.4968e-008 mm/mm
Maximum	6.1645e-004 mm	1.7105e-006 mm/mm
Average	1.5366e-004 mm	5.4677e-007 mm/mm
Minimum Occurs On	Chassie_simplified v0[1]-FreeParts|Body1	
Maximum Occurs On	Chassie_simplified v0[1]-FreeParts|Body1	
Information		
Time	1. s	
Load Step	1	
Substep	1	
Iteration Number	1	
Integration Point Results		
Display Option		Averaged
Average Across Bodies		No

FIGURE 4
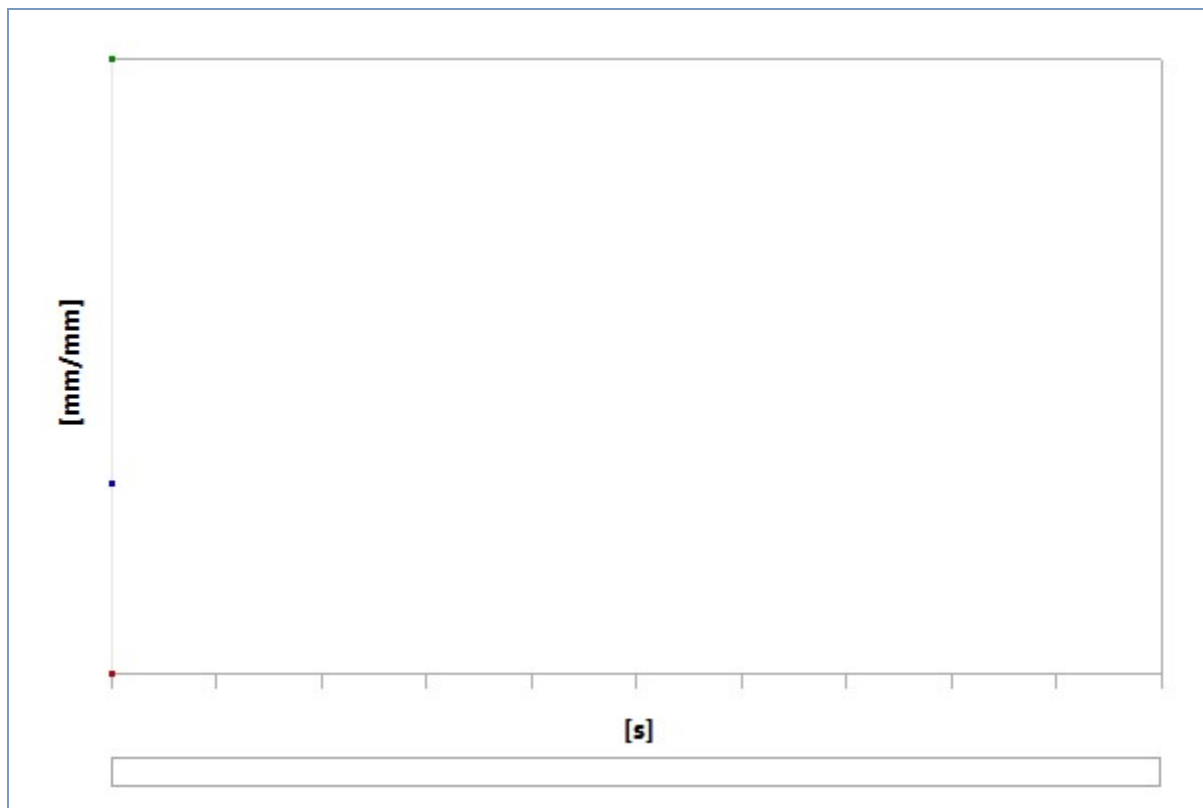**Model (A4) > Static Structural (A5) > Solution (A6) > Total Deformation**

TABLE 17
Model (A4) > Static Structural (A5) > Solution (A6) > Total Deformation

Time [s]	Minimum [mm]	Maximum [mm]	Average [mm]
1.	0.	6.1645e-004	1.5366e-004

FIGURE 5
Model (A4) > Static Structural (A5) > Solution (A6) > Total Deformation > Figure
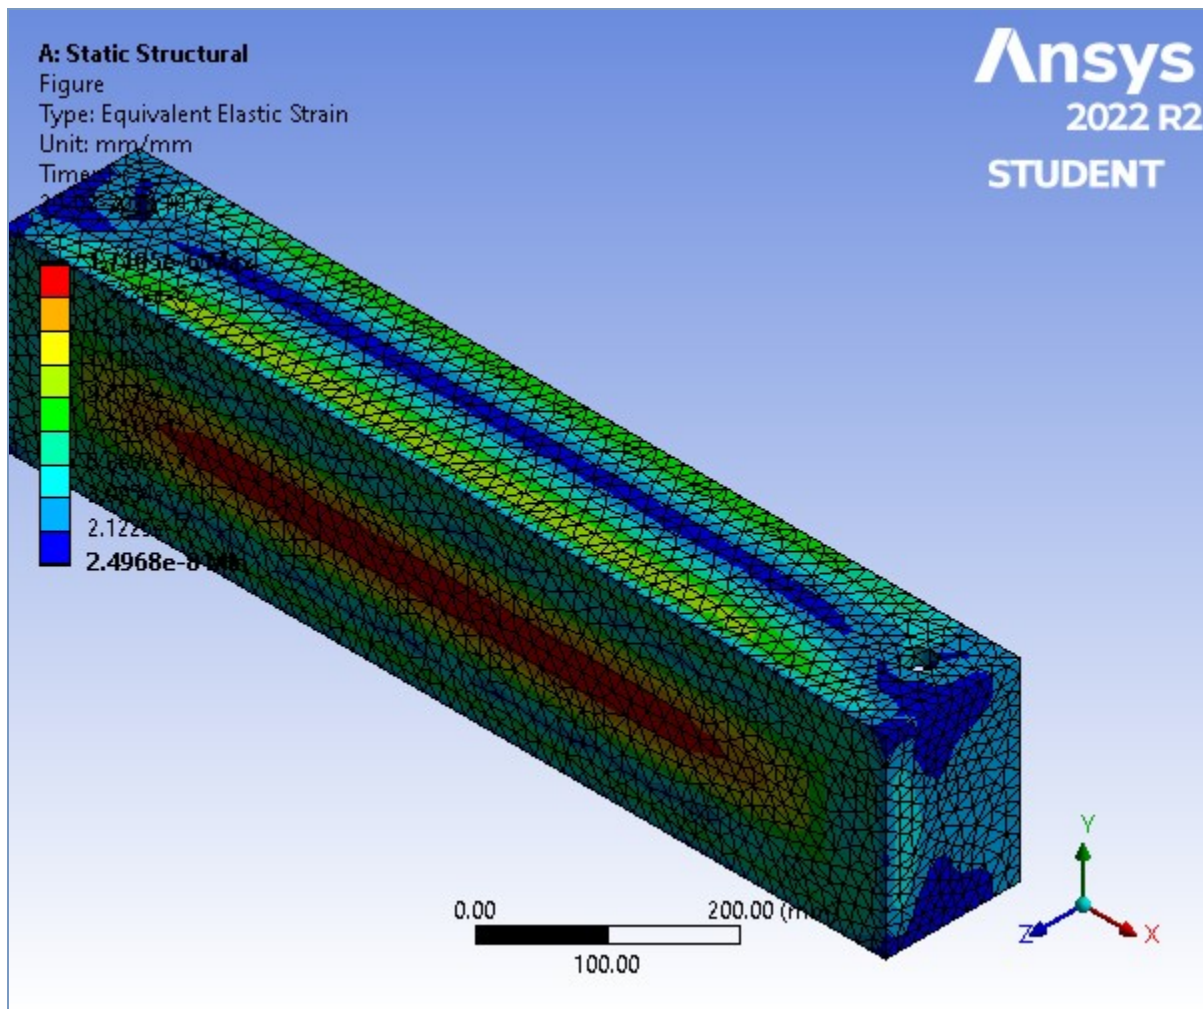
FIGURE 6
Model (A4) > Static Structural (A5) > Solution (A6) > Equivalent Elastic Strain

TABLE 18
Model (A4) > Static Structural (A5) > Solution (A6) > Equivalent Elastic Strain

Time [s]	Minimum [mm/mm]	Maximum [mm/mm]	Average [mm/mm]
1.	2.4968e-008	1.7105e-006	5.4677e-007

FIGURE 7
Model (A4) > Static Structural (A5) > Solution (A6) > Equivalent Elastic Strain > Figure

TABLE 19
Model (A4) > Static Structural (A5) > Solution (A6) > Stress Safety Tools

| Object Name	Stress Tool
State	Solved
Definition	
Theory	Max Equivalent Stress
Stress Limit Type	Tensile Yield Per Material

TABLE 20
Model (A4) > Static Structural (A5) > Solution (A6) > Stress Tool > Results

Object Name	Safety Factor
State	Solved
Scope	
Scoping Method	Geometry Selection
Geometry	All Bodies
Definition	
Type	Safety Factor
By	Time
Display Time	Last
Calculate Time History	Yes
Identifier	
Suppressed	No
Integration Point Results	

Display Option	Averaged
Average Across Bodies	No
Results	
Minimum	> 10
Minimum Occurs On	Chassie_simplified v0[1]-FreeParts|Body1
Information	
Time	1. s
Load Step	1
Substep	1
Iteration Number	1

FIGURE 8
Model (A4) > Static Structural (A5) > Solution (A6) > Stress Tool > Safety Factor
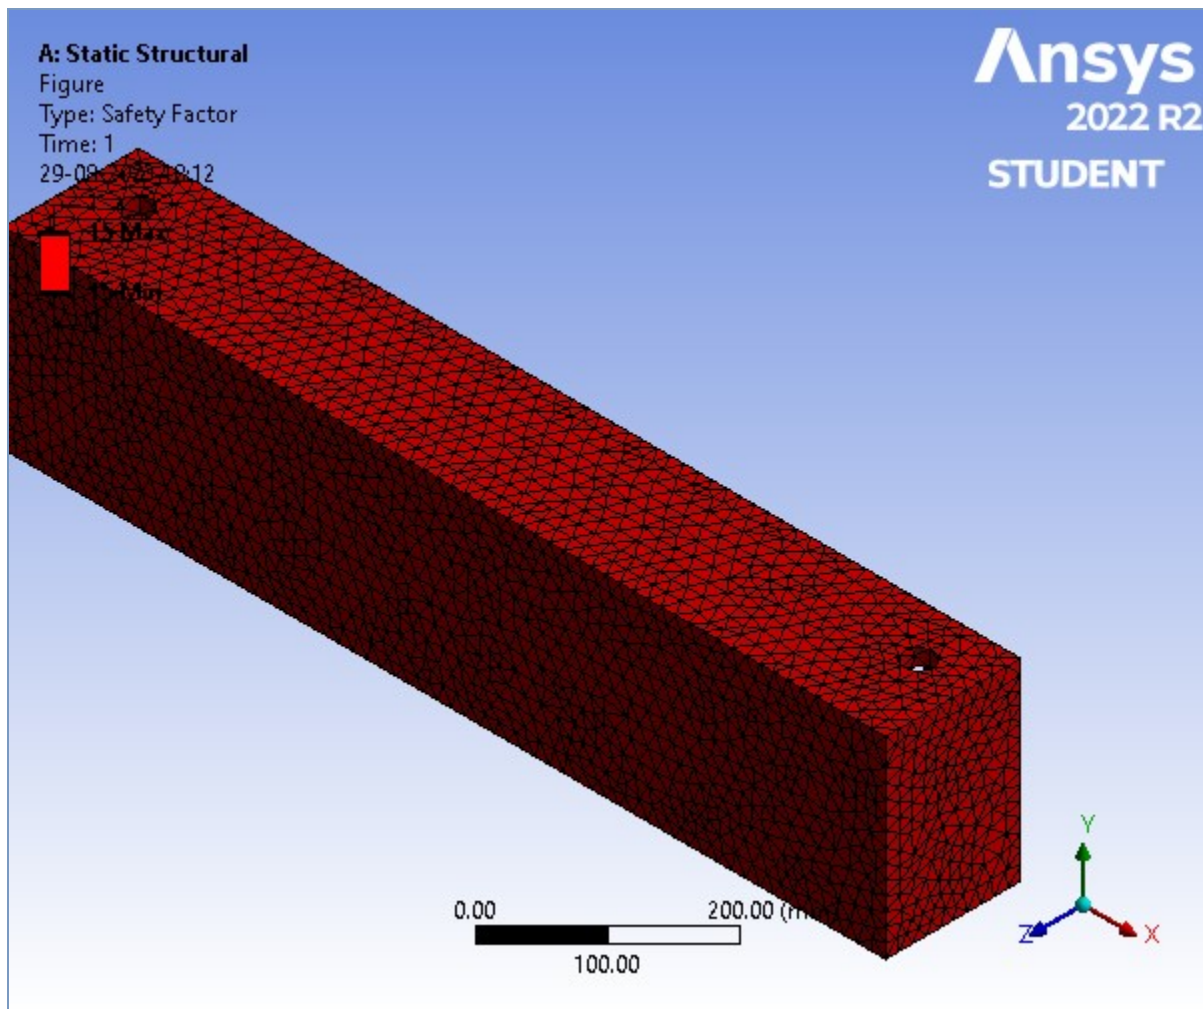

[s]
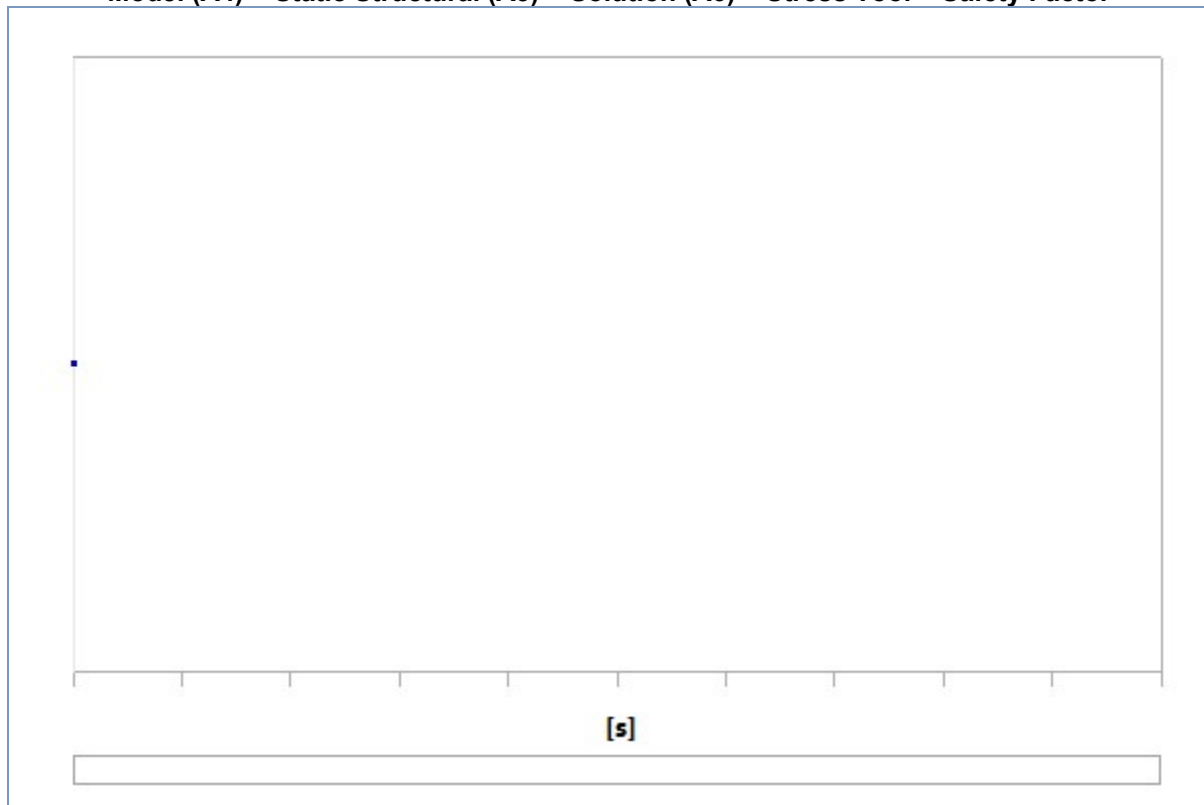
TABLE 21
Model (A4) > Static Structural (A5) > Solution (A6) > Stress Tool > Safety Factor

Time [s]	Minimum	Maximum	Average
1.	15.	15.	15.

FIGURE 9
Model (A4) > Static Structural (A5) > Solution (A6) > Stress Tool > Safety Factor > Figure

A: Static Structural
Figure
Type: Safety Factor
Time: 1
29-09-...

Material Data

Aluminum Alloy

TABLE 22
Aluminum Alloy > Constants

Density	2.77e-006 kg mm^-3
Coefficient of Thermal Expansion	2.3e-005 C^-1
Specific Heat	8.75e+005 mJ kg^-1 C^-1

TABLE 23
Aluminum Alloy > Color

Red	Green	Blue
138	104	46

TABLE 24
Aluminum Alloy > Compressive Ultimate Strength

Compressive Ultimate Strength MPa
0

TABLE 25
Aluminum Alloy > Compressive Yield Strength

Compressive Yield Strength MPa
280

TABLE 26
Aluminum Alloy > Tensile Yield Strength

Tensile Yield Strength MPa
280

TABLE 27
Aluminum Alloy > Tensile Ultimate Strength

Tensile Ultimate Strength MPa
310

TABLE 28
Aluminum Alloy > Isotropic Secant Coefficient of Thermal Expansion

Zero-Thermal-Strain Reference Temperature C
22

TABLE 29
Aluminum Alloy > Isotropic Thermal Conductivity

Thermal Conductivity W mm^-1 C^-1	Temperature C
0.114	-100
0.144	0
0.165	100
0.175	200

TABLE 30
Aluminum Alloy > S-N Curve

Alternating Stress MPa	Cycles	R-Ratio
275.8	1700	-1
241.3	5000	-1
206.8	34000	-1
172.4	1.4e+005	-1
137.9	8.e+005	-1
117.2	2.4e+006	-1
89.63	5.5e+007	-1
82.74	1.e+008	-1
170.6	50000	-0.5
139.6	3.5e+005	-0.5
108.6	3.7e+006	-0.5
87.91	1.4e+007	-0.5
77.57	5.e+007	-0.5
72.39	1.e+008	-0.5
144.8	50000	0
120.7	1.9e+005	0
103.4	1.3e+006	0
93.08	4.4e+006	0
86.18	1.2e+007	0
72.39	1.e+008	0
74.12	3.e+005	0.5
70.67	1.5e+006	0.5
66.36	1.2e+007	0.5
62.05	1.e+008	0.5

TABLE 31
Aluminum Alloy > Isotropic Resistivity

Resistivity ohm mm	Temperature C
2.43e-005	0
2.67e-005	20
3.63e-005	100

TABLE 32
Aluminum Alloy > Isotropic Elasticity

Young's Modulus MPa	Poisson's Ratio	Bulk Modulus MPa	Shear Modulus MPa	Temperature C
71000	0.33	69608	26692	

TABLE 33
Aluminum Alloy > Isotropic Relative Permeability

Relative Permeability
1