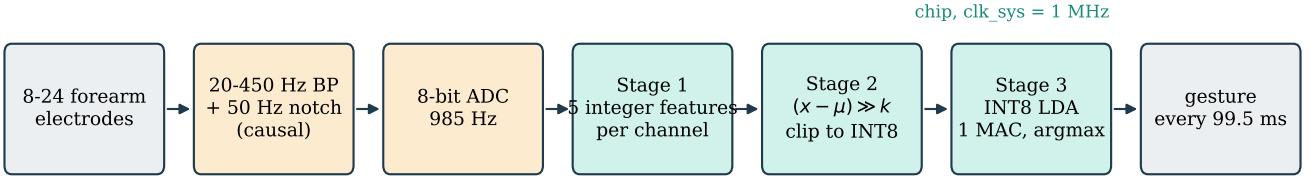
chip, clk_sys = 1 MHz
8-24 forearm electrodes
20-450 Hz BP + 50 Hz notch (causal)
8-bit ADC 985 Hz
Stage 1 5 integer features per channel
Stage 2 $(x-\mu) \gg k$ clip to INT8
Stage 3 INT8 LDA 1 MAC, argmax
gesture every 99.5 ms
analog / ADC pod
196-sample window, 98-sample stride