



COST ESTIMATE

PT VKTR Teknologi Mobilitas Tbk.

Bakrie Tower 35th Floor, Rasuna Epicentrum,
Jl. Epicentrum Utama Raya No. 2,
Karet Kuningan, Kecamatan Setiabudi,
Jakarta Selatan, DKI Jakarta 12940

Number 0001/L/VKTR/RNT-EFS/09-2026

Release Date 6 September 2026

Expiry Date 6 October 2026

To

PT Siborong Nusa Gemilang

Belleza BSA, 1st Floor Unit 106, Jl. Letjen Soepeno,
Kelurahan Grogol Utara, Kecamatan Kebayoran Lama,
Jakarta Selatan 12210

Disclaimer

This document is strictly confidential for the use of the recipient and may not be circulated to other parties without PT VKTR Teknologi Mobilitas Tbk. prior written consent.

Sales/Account Person	Product	Prepared By
Jeremy Jonathan Denny Raharto	VKTR Light Duty Truck 4x2, Short Wheelbase, with Dumper, Battery 90 kWh, CKD, loco Magelang, incl. VAT	Errol Franklin B. Siahaan

Quantity	Description	Rental/Month Unit	Rental/Month Total
40	Rental Scheme, 5-year Contract VKTR Light Duty Truck 4x2, with Dumper, Short Wheelbase, Battery 90 kWh, CKD, loco Magelang, incl. VAT Inclusions: - Onsite training during initial deployment, 2 week - Online training refreshment 1x (first year) - On-call technical support Exclusions: - Delivery To Site - Maintenance - Other Requests	Rp 35,309,397	Rp 1,412,375,872

If you have questions concerning this quotation, please contact:
Jeremy Jonathan | jeremy.jonathan@vktr.id | +6287771969563

Total Rp 1,412,375,872

Special Notes or Arrangements

- Delivery time and maintenance service contract details will be discussed
- Cost Estimate is not binding, the actual pricing to be confirmed post assessment

To accept this quotation, sign here and return:

Name:

Title:

Date:


PT VKTR Teknologi Mobilitas Tbk

Bakrie Tower 35th Floor, Rasuna Epicentrum
Jl. H. R. Rasuna Said, Jakarta 12940, Indonesia
(021) 2991 2222 | www.vktr.id

SPECIFICATION



ELECTRIC LIGHT DUTY TRUCK

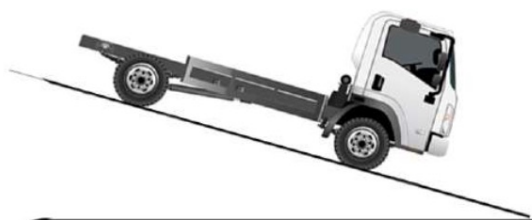

► REGENERATIVE BRAKING

Strong energy regeneration which generates strong brake force, assist driver in braking and enhance energy regeneration efficiency and range

► LARGE GRADEABILITY

Wheel torque more than 14000N.m, the gradeability is $\geq 38\%$ @ 8.6T, $\geq 25\%$ @ 12.5T.

► HIGH GROUND CLEARANCE

High ground clearance, passability is superior to that of oil vehicles, and meets off-road applications.



**5 years
Battery Warranty**



**180 minutes
fully charge**



**Low
Operational
Costs**



**Up to
220 KM**

► E-PTO READY

Electric PTO has been included to the truck. Easy adaptation for local conventional body builders.



► POWERFUL POWERTRAIN

Powerful AC PMSM motor drive the truck to higher gradeability even in full load condition.




SPECIFICATION




► MULTIBODY APPLICATION

Multiple type of body can be applied, ready for any type of jobs.

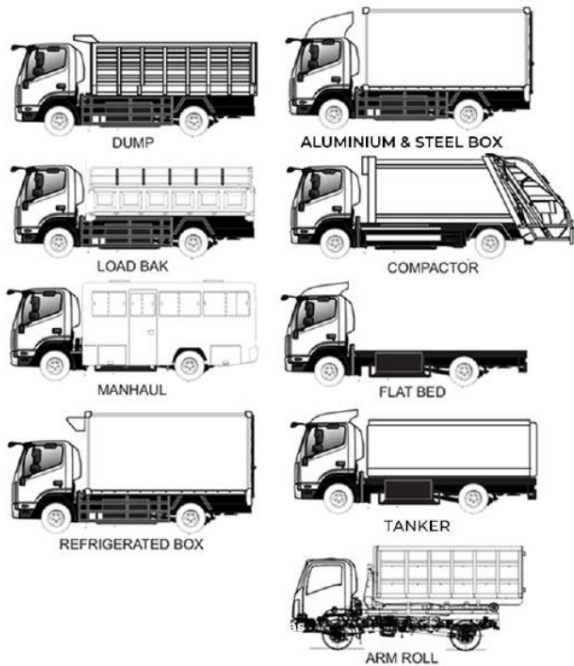

► CHASSIS DRAWING

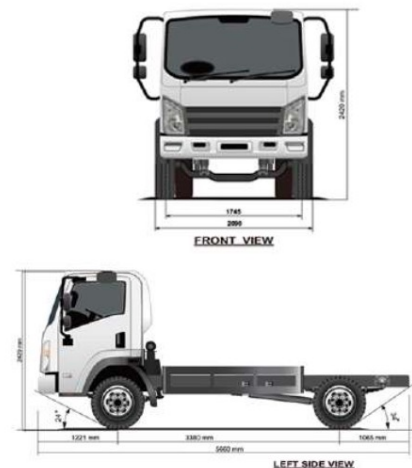

► DOUBLE-LAYER FRAME DESIGN

Adopting a double-layer frame design, the frame is stronger, with a greater load capacity and no deformation of the frame.



SPECIFICATION



Rear View



Oblique View—Left



Front View



Oblique View—Right

SPECIFICATION LIGHT DUTY TRUCK OFFROAD 4X2

Vehicle Type	Short Wheelbase	Medium Wheelbase
Dimension		
Length x Width x Height	5660 x 2090 x 2420 mm	6210 x 2090 x 2420 mm
Cab to End	3750 mm	4350 mm
Wheelbase	3380 mm	4000 mm
Front / Rear Overhang	1221 / 1065 mm	1221 / 1010 mm
Front / Rear Track	1745 / 1625 mm	1745 / 1625 mm
Ground Clearance Axle	195 mm	195 mm
Ground Clearance Non-Axle	357 mm	357 mm
Approach Angle	24°	24°
Departure Angle	34°	17°
Ramp Angle	21°	18°
Turning Radius	6.85 m	7.94 m
Battery		
Type	CATL LFP	CATL LFP
Capacity	90 kWh	90 / 132 / 169 kWh
Cooling	Air Cooling	Air Cooling
Performance		
Range	up to 120 km	up to 220 km
Max Speed	85 km/h	85 km/h
Max Gradeability	25%	25%
Weight		
Curb Weight	3.4 T	3.7 / 4.0 / 4.3 T
GVW Regulated	8.25 T	9.0 T
Axle Capacity	4.5 + 8 T	4.5 + 8 T
Frame		
Type	Ladder Frame Dual Layer	Ladder Frame Dual Layer
Charging		
Type	DC	DC
Connector	CCS2	CCS2
Power	90 kWh	90 kW / 120 kW
Charge Time	50 minutes	50 / 75 / 90 minutes
Motor		
Peak power & torque	150 kW, 2250 Nm	150 kW, 2250 Nm
Rated power & torque	85 kW, 1100 Nm	85 kW, 1100 Nm
Type	AC PMSM	AC PMSM
Cooling	Liquid Cooling	Liquid Cooling
PTO		
Power	20 kW e-PTO (Motor only)	20 kW e-PTO (Motor only)
Axles		
Configuration	4 x 2	4 x 2
Final Drive Ratio	5.571	5.571
Steering	EHPs Recirculating Ball Screw	EHPs Recirculating Ball Screw
Suspension		
Front	Multi-layer Leaf Spring Trapezoidal	Multi-layer Leaf Spring Trapezoidal
Rear	Multi-layer Leaf Spring with helper Trapezoidal	Multi-layer Leaf Spring with helper Trapezoidal
Braking System		
Type	Air Brake, Drum	Air Brake, Drum
Auxiliary	Regenerative Braking	Regenerative Braking
Parking Brake	Lever in Cabin	Lever in Cabin
Safety System	Spring Actuated on Rear Axle	Spring Actuated on Rear Axle
Wheel & Tire	ABS + HSA	ABS + HSA
Rim Size	6.00G x 16	6.00G x 16
Tire Size	7.50-16 16 PR	7.50-16 16 PR
Cabin		
Steering Wheel	Right-Hand Drive	Right-Hand Drive
Tilting	Manual	Manual
Suspension	Solid Mount	Solid Mount