



Document Creation Date: 8/26/2025

Design : free\_electron



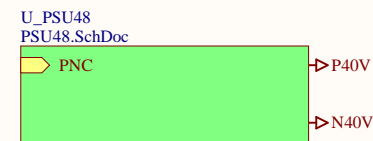


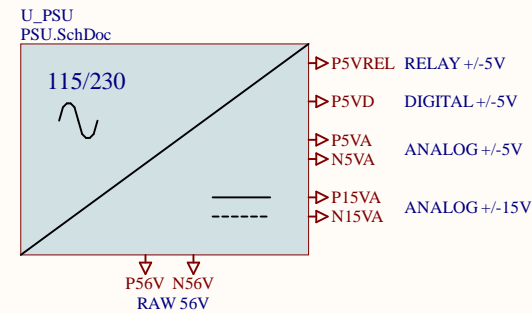



U\_PROCESSOR  
PROCESSOR.SchDoc

U\_POWERAMP  
POWERAMP.SchDoc



U\_POWERMUX  
POWERMUX.SchDoc

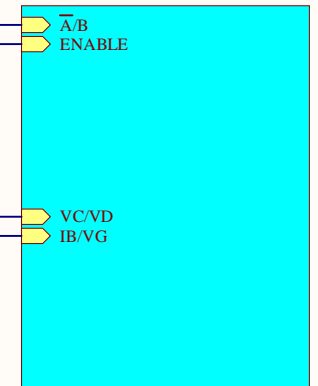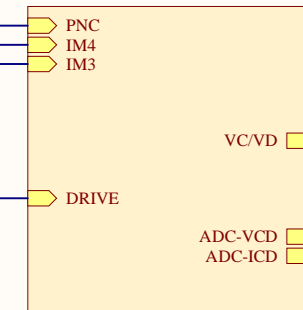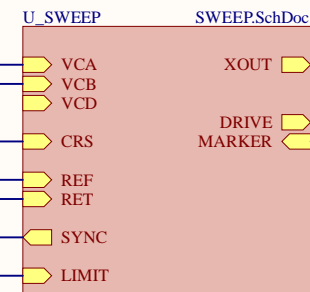


WORK IN PROGRESS

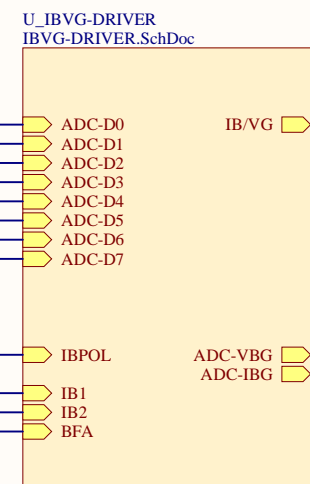



U\_FrontPanel  
FrontPanel.SchDoc

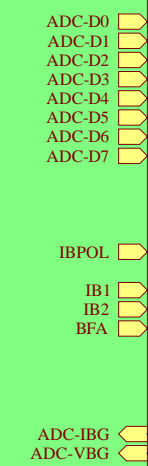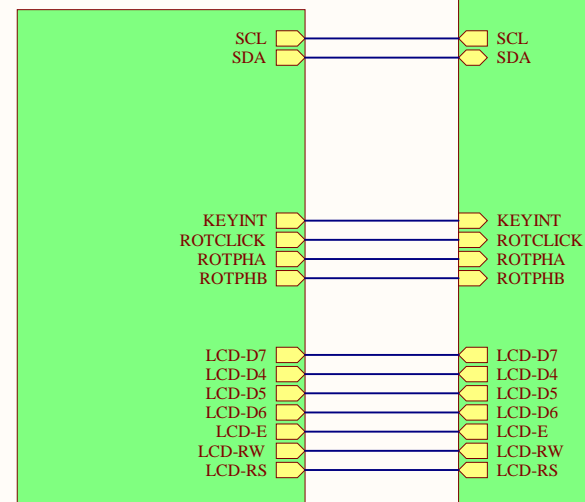


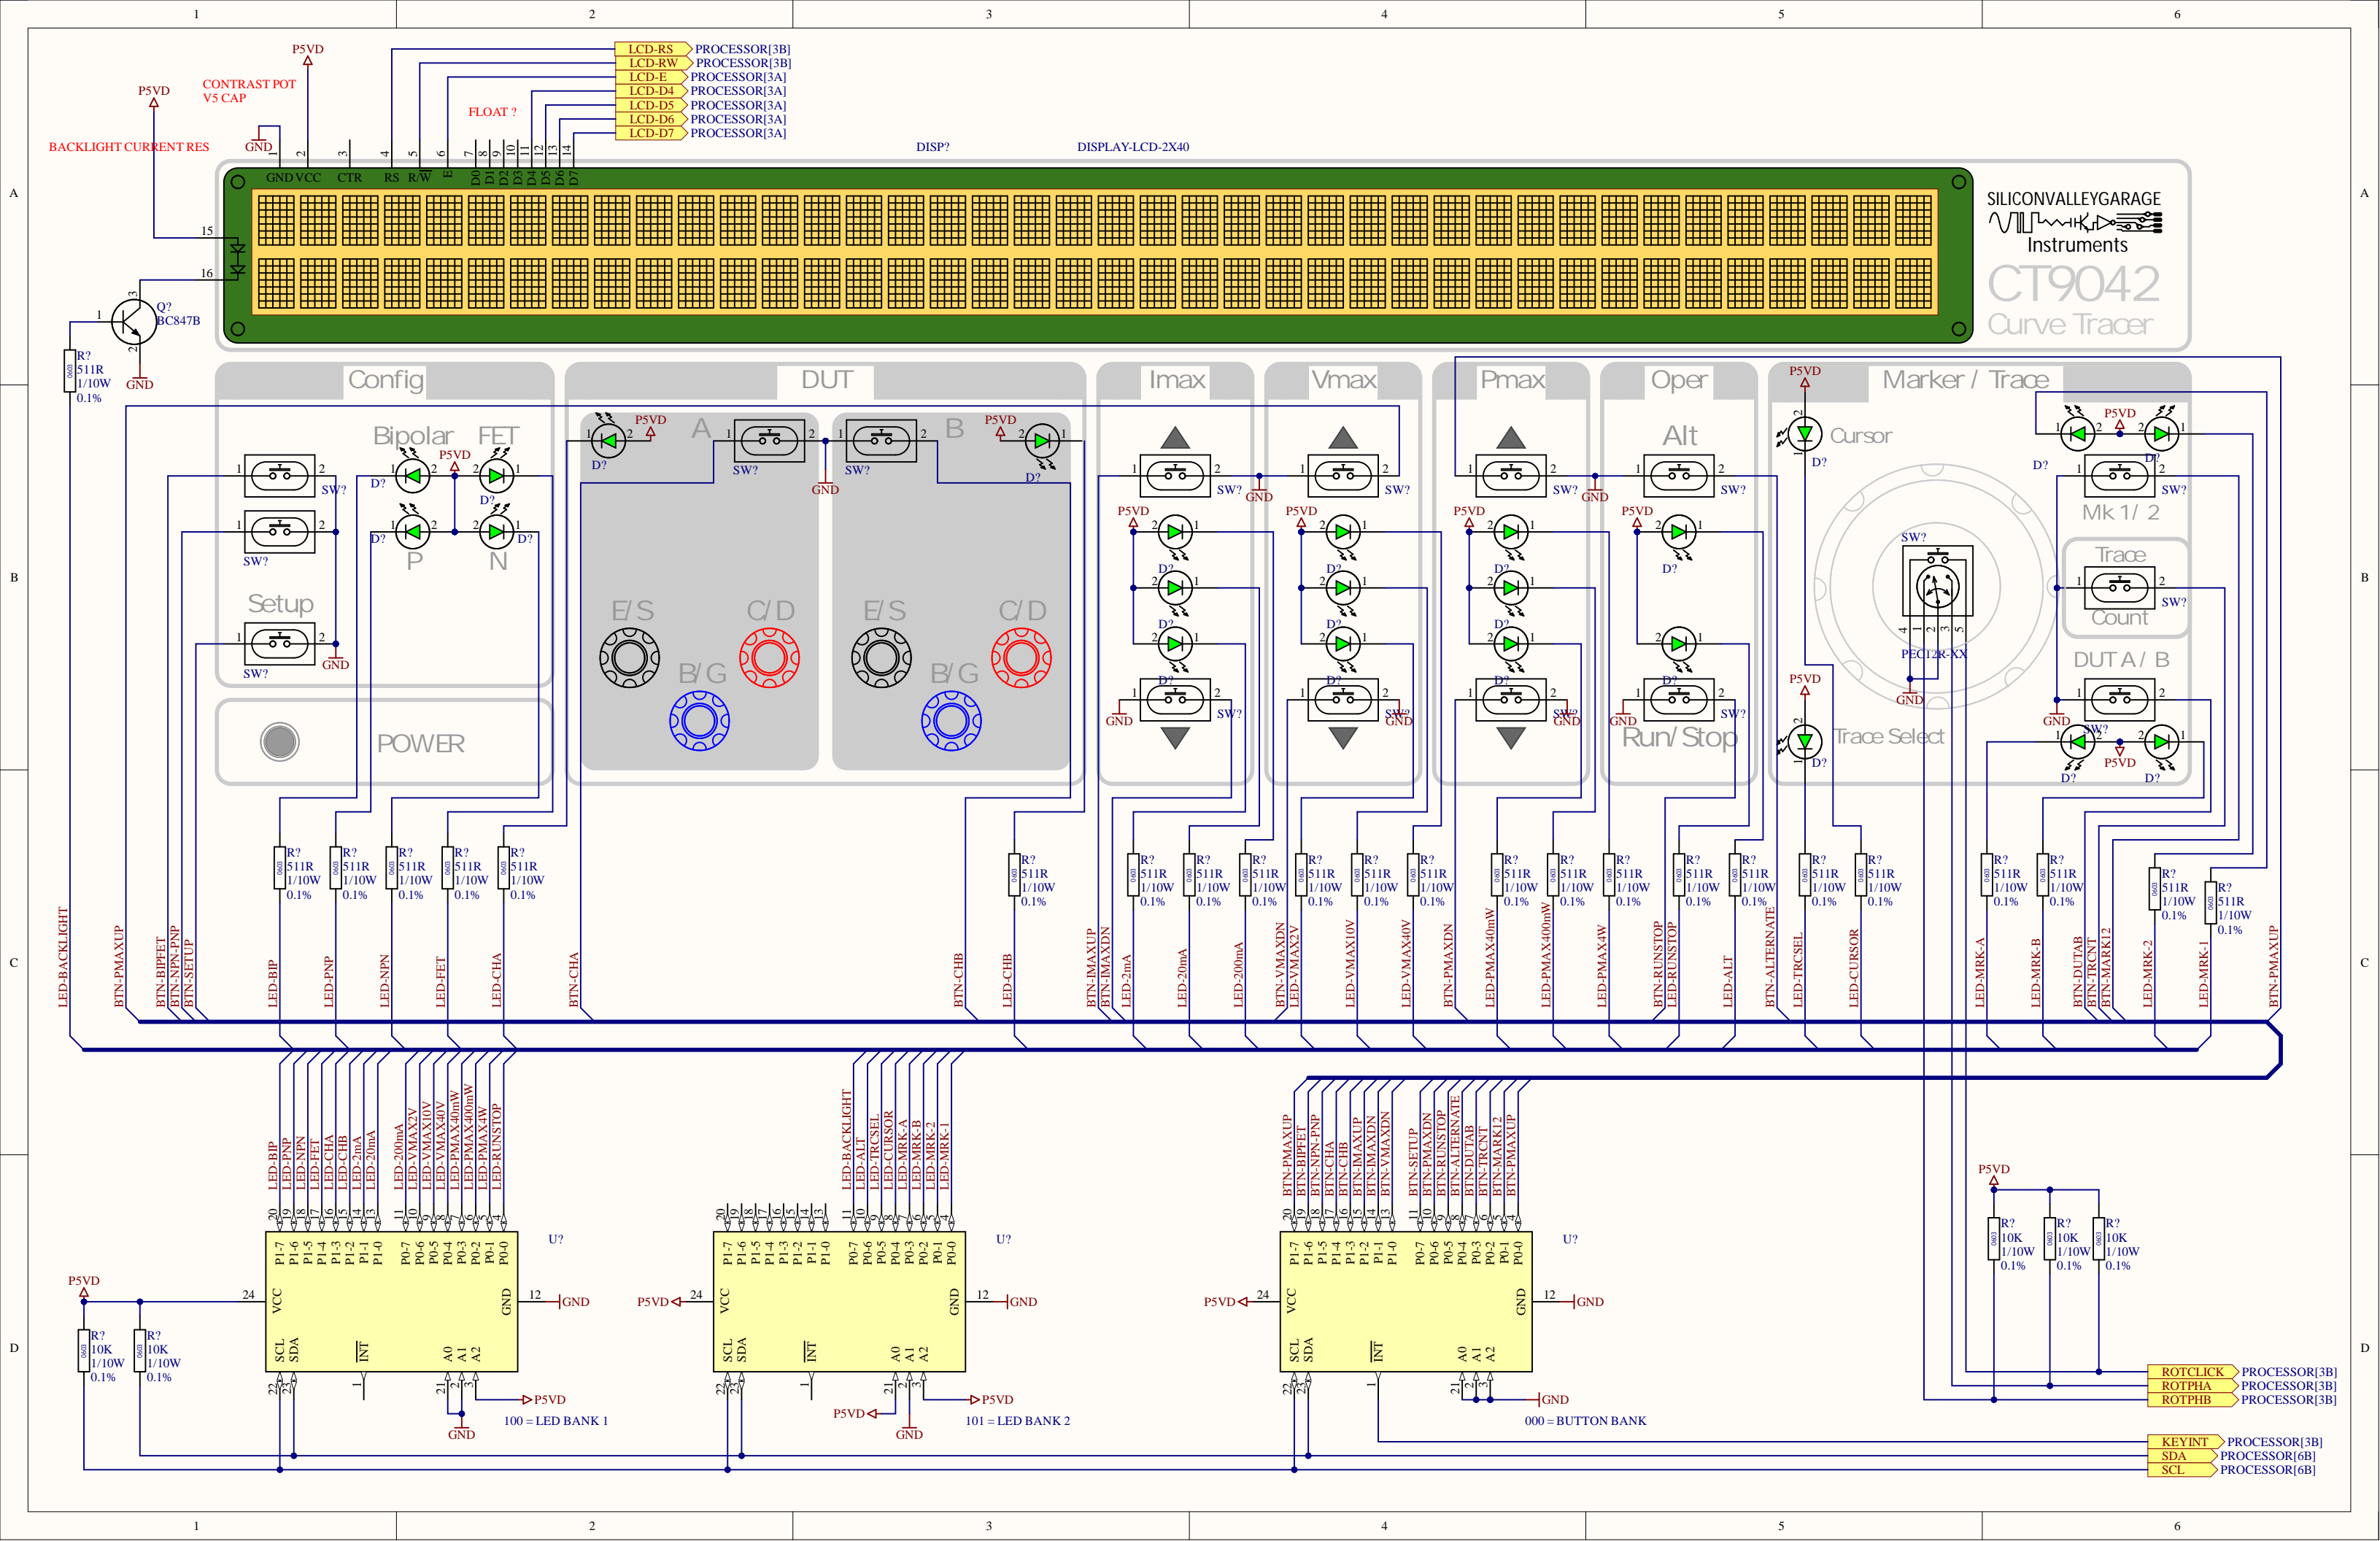




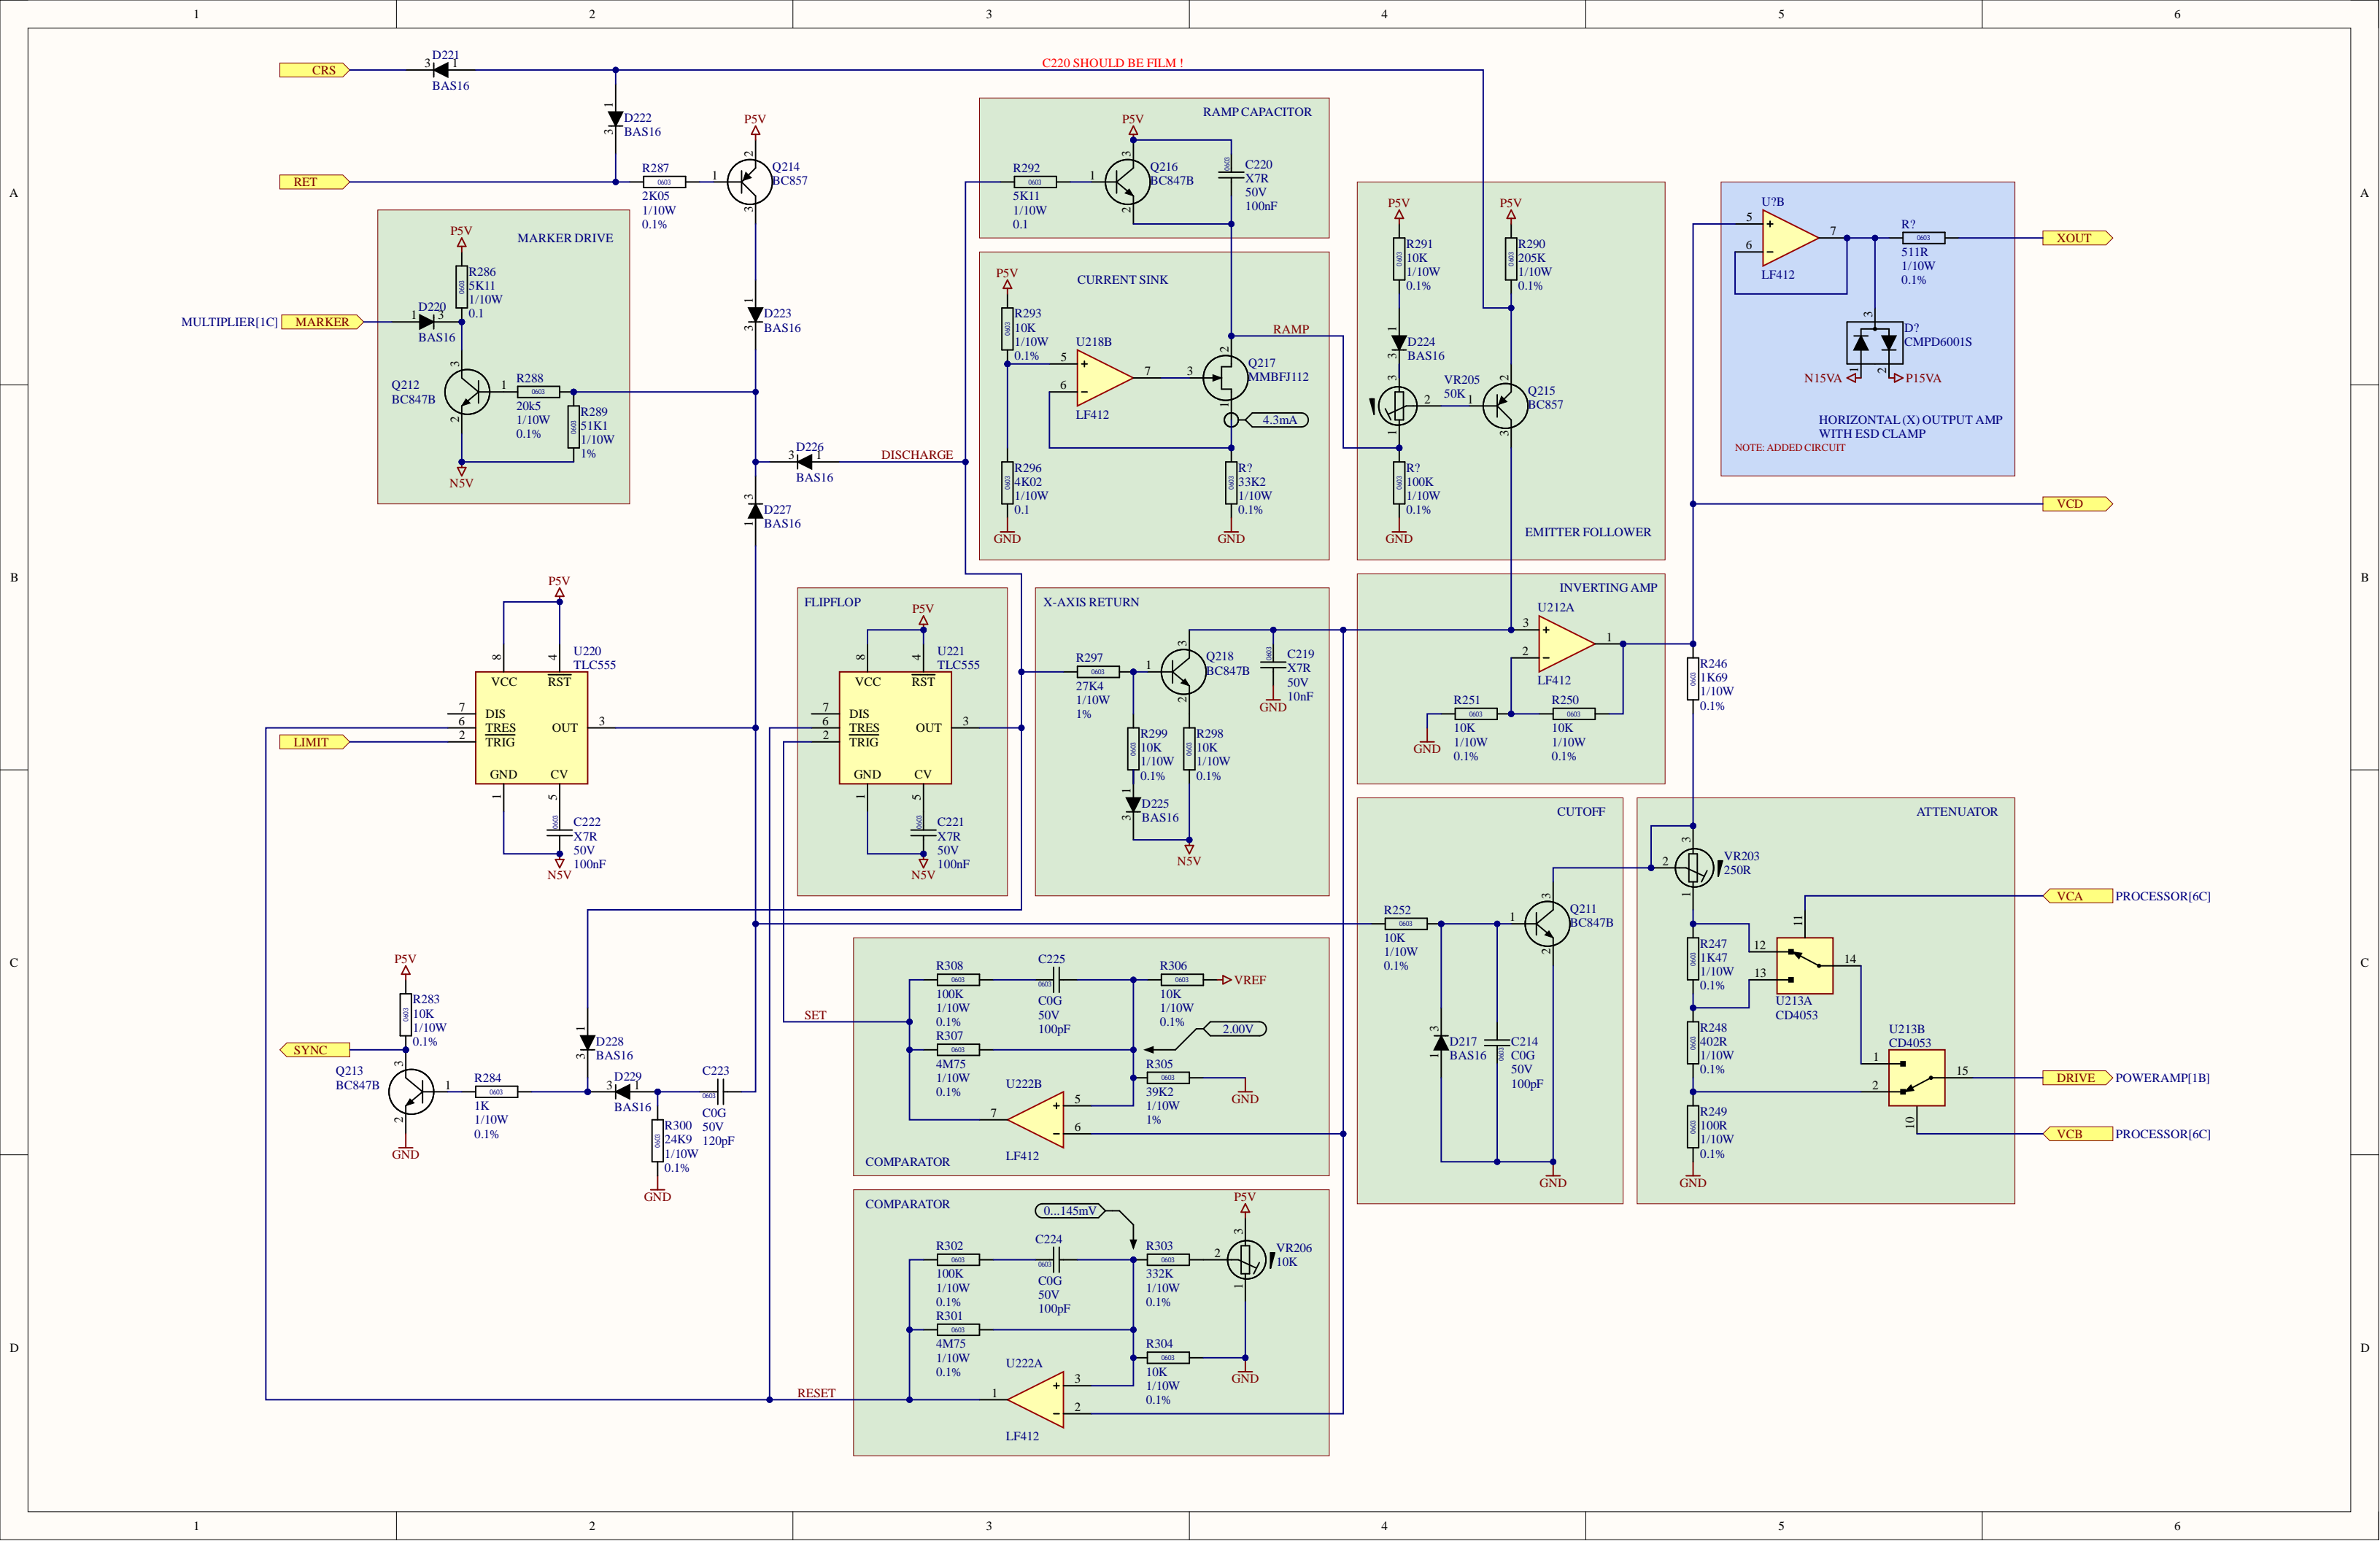


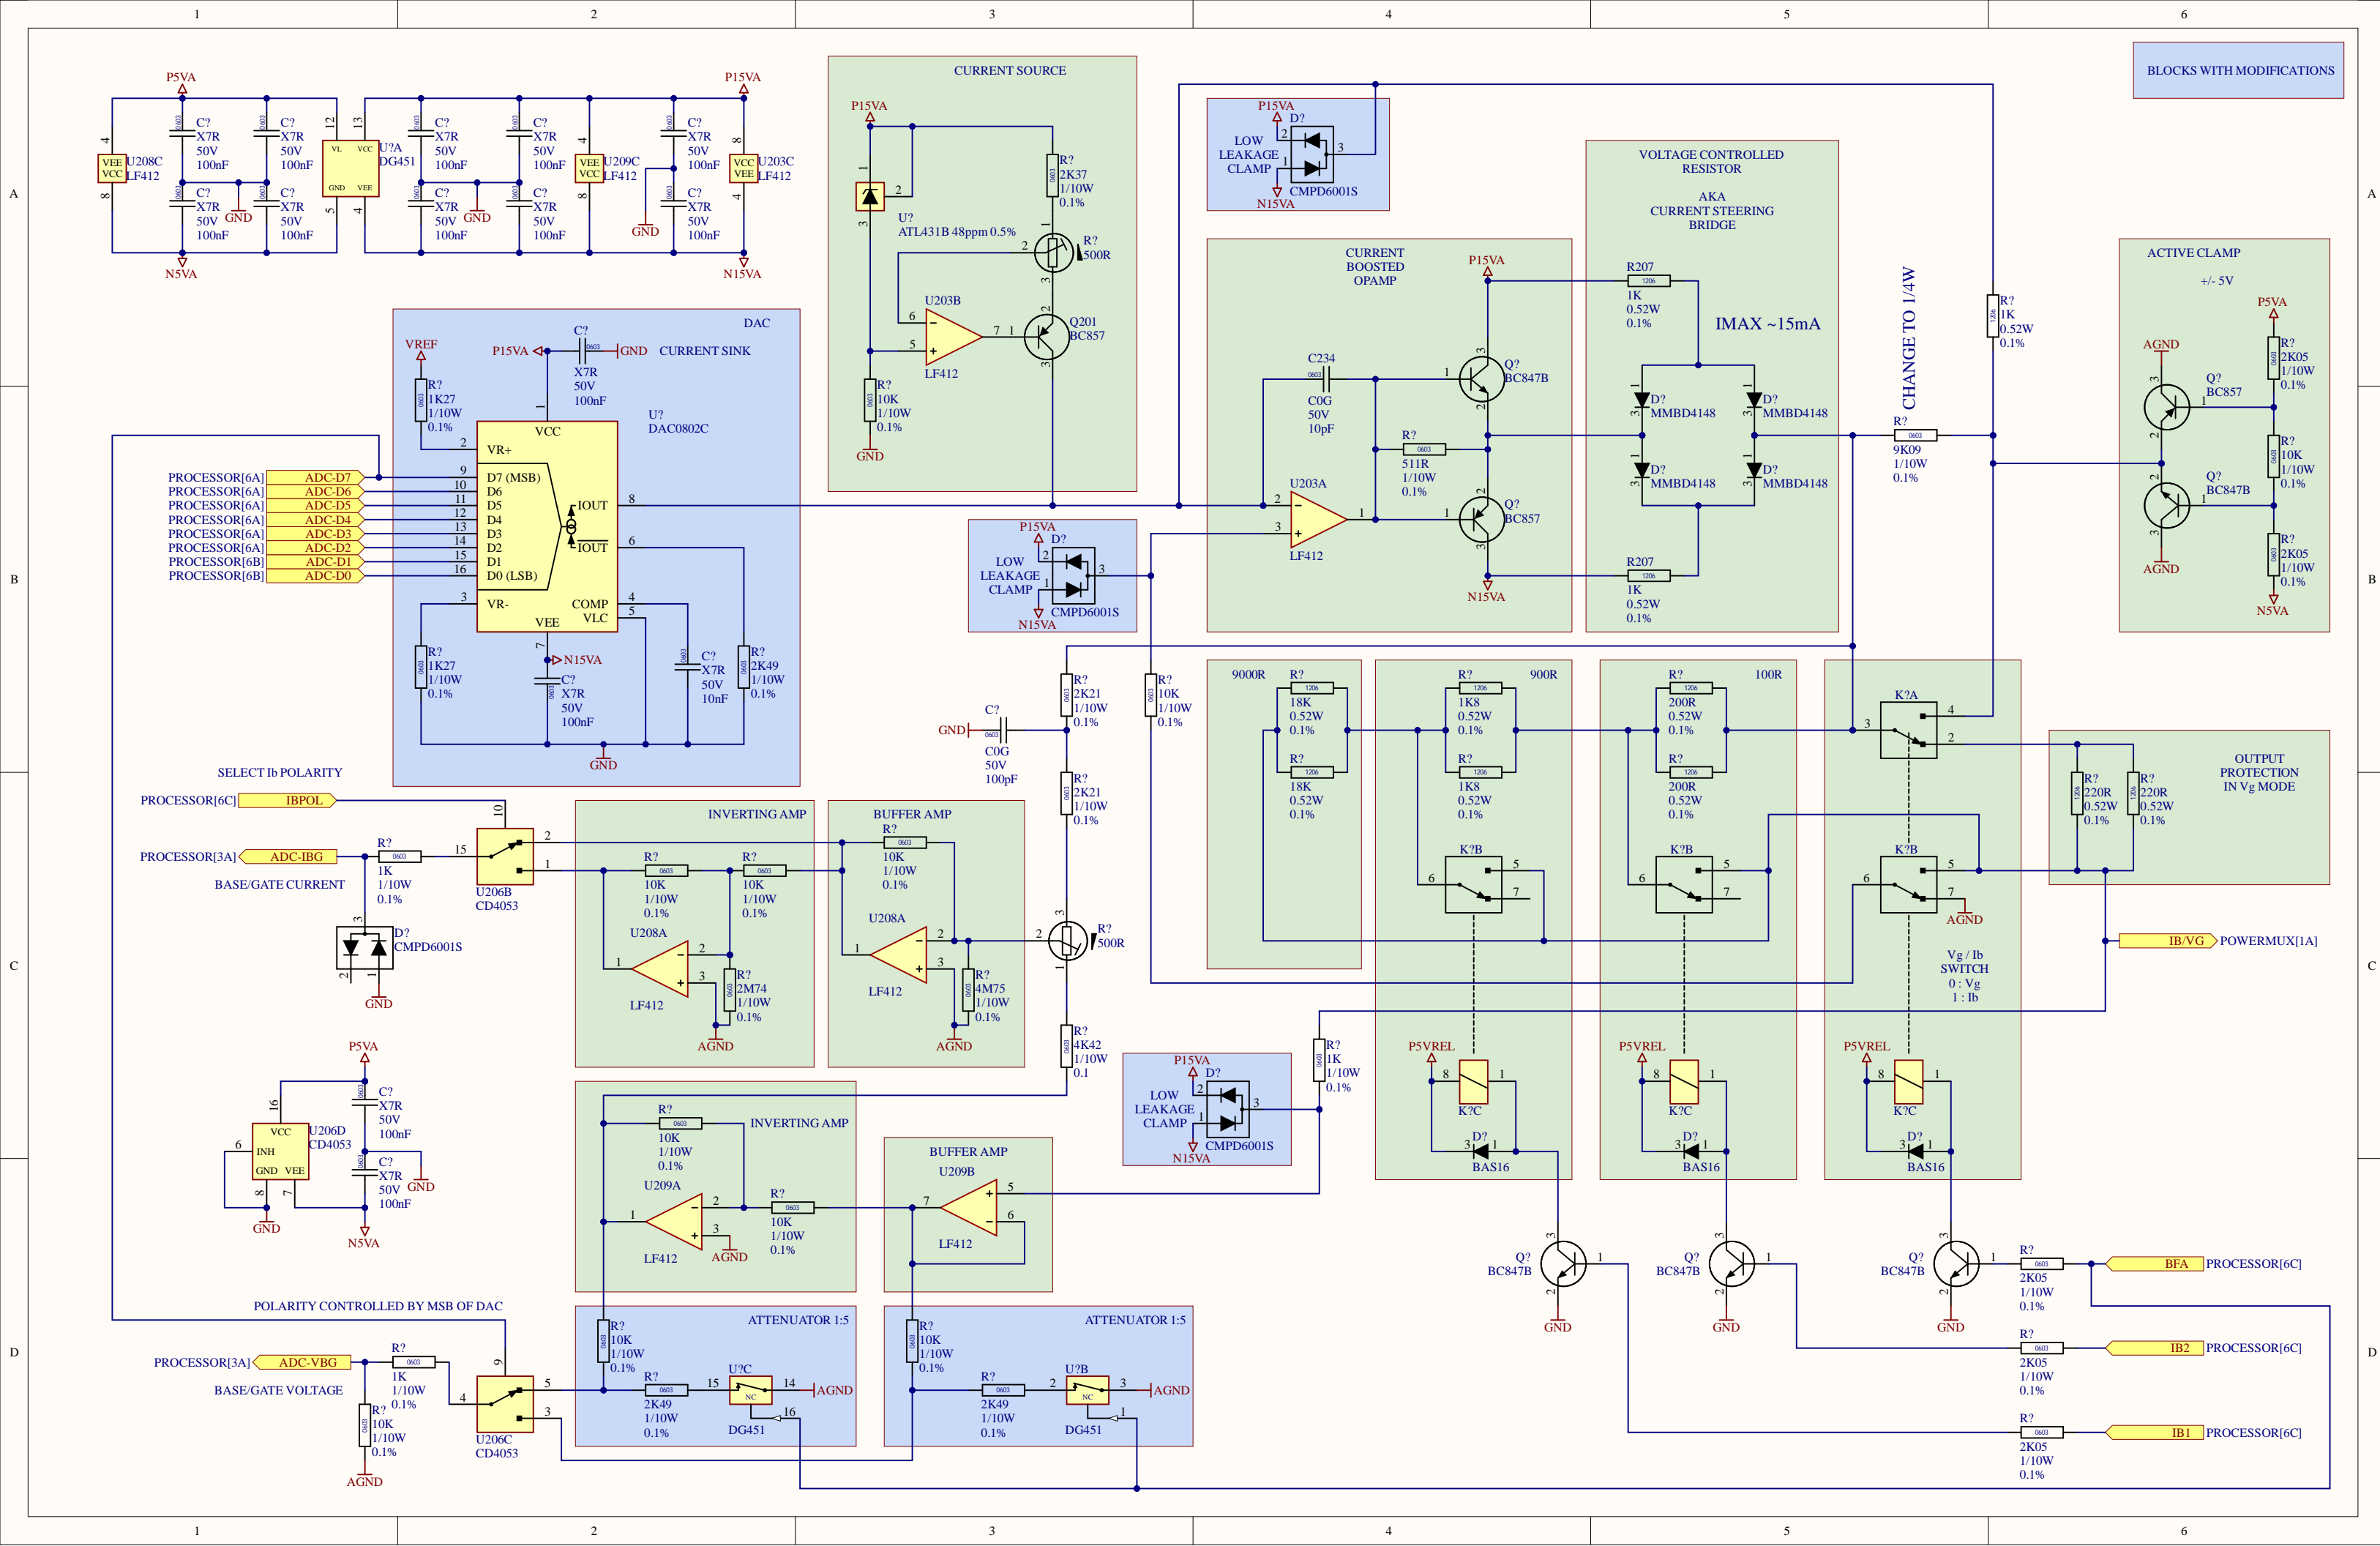





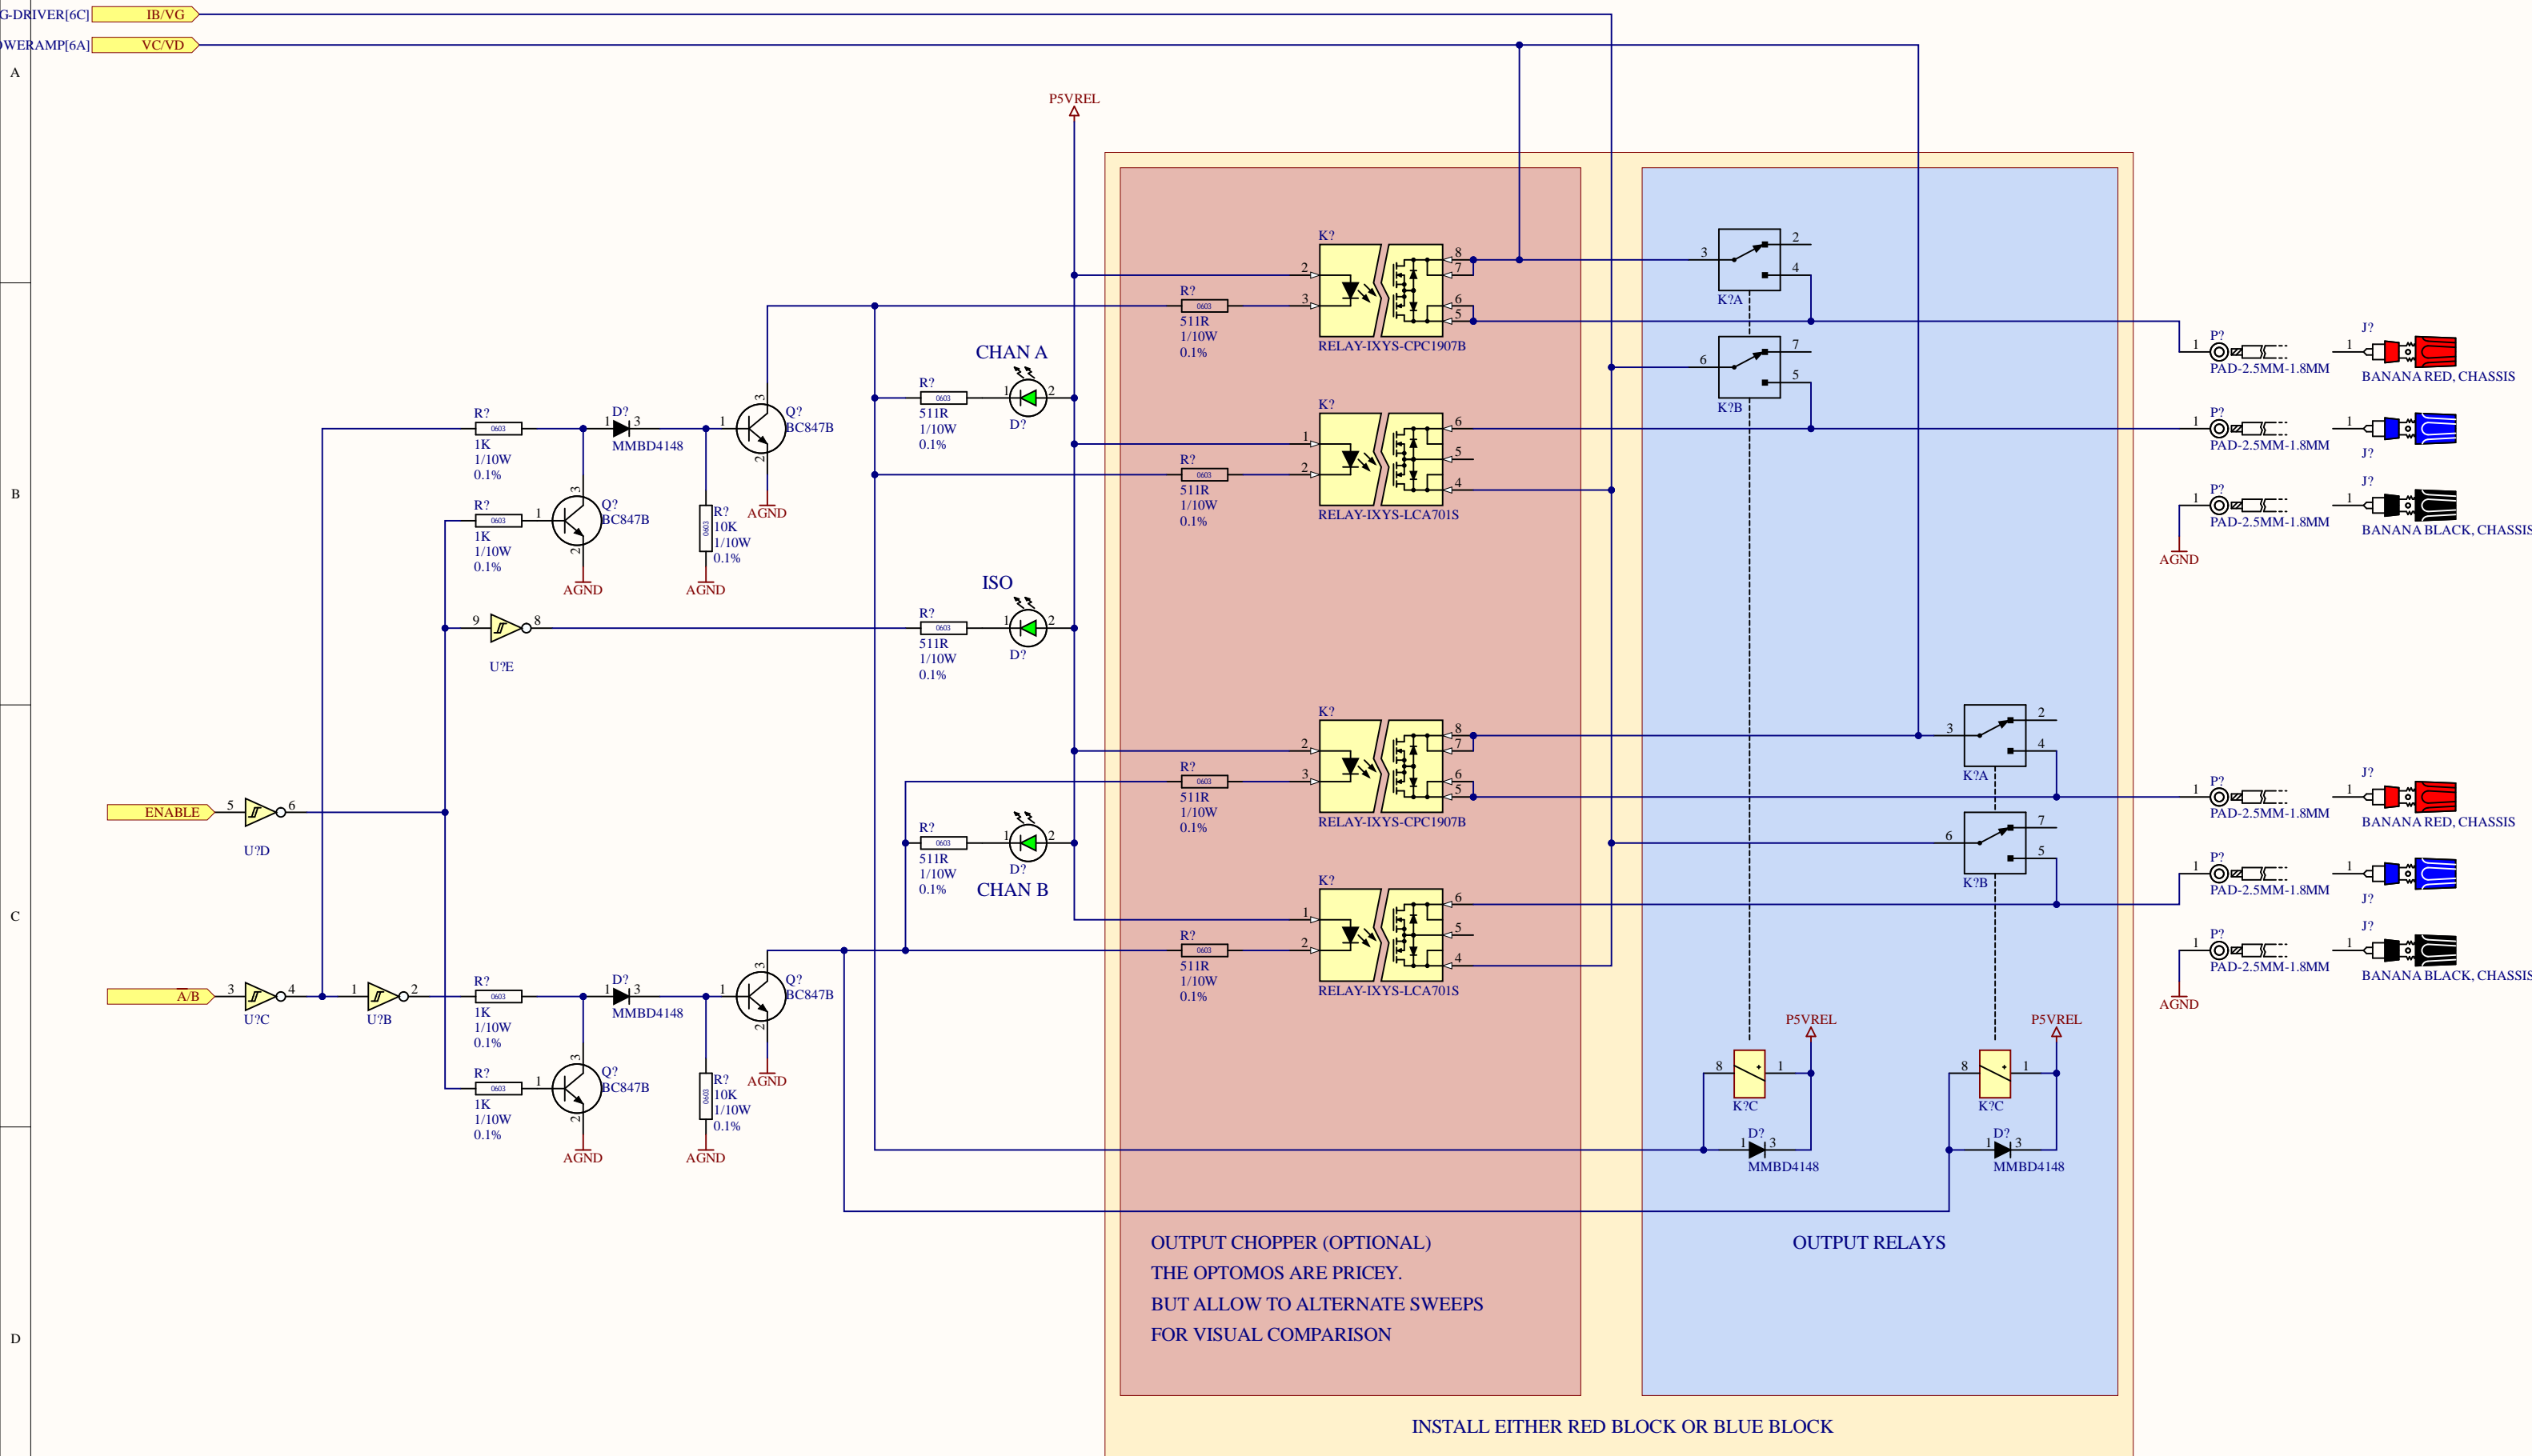



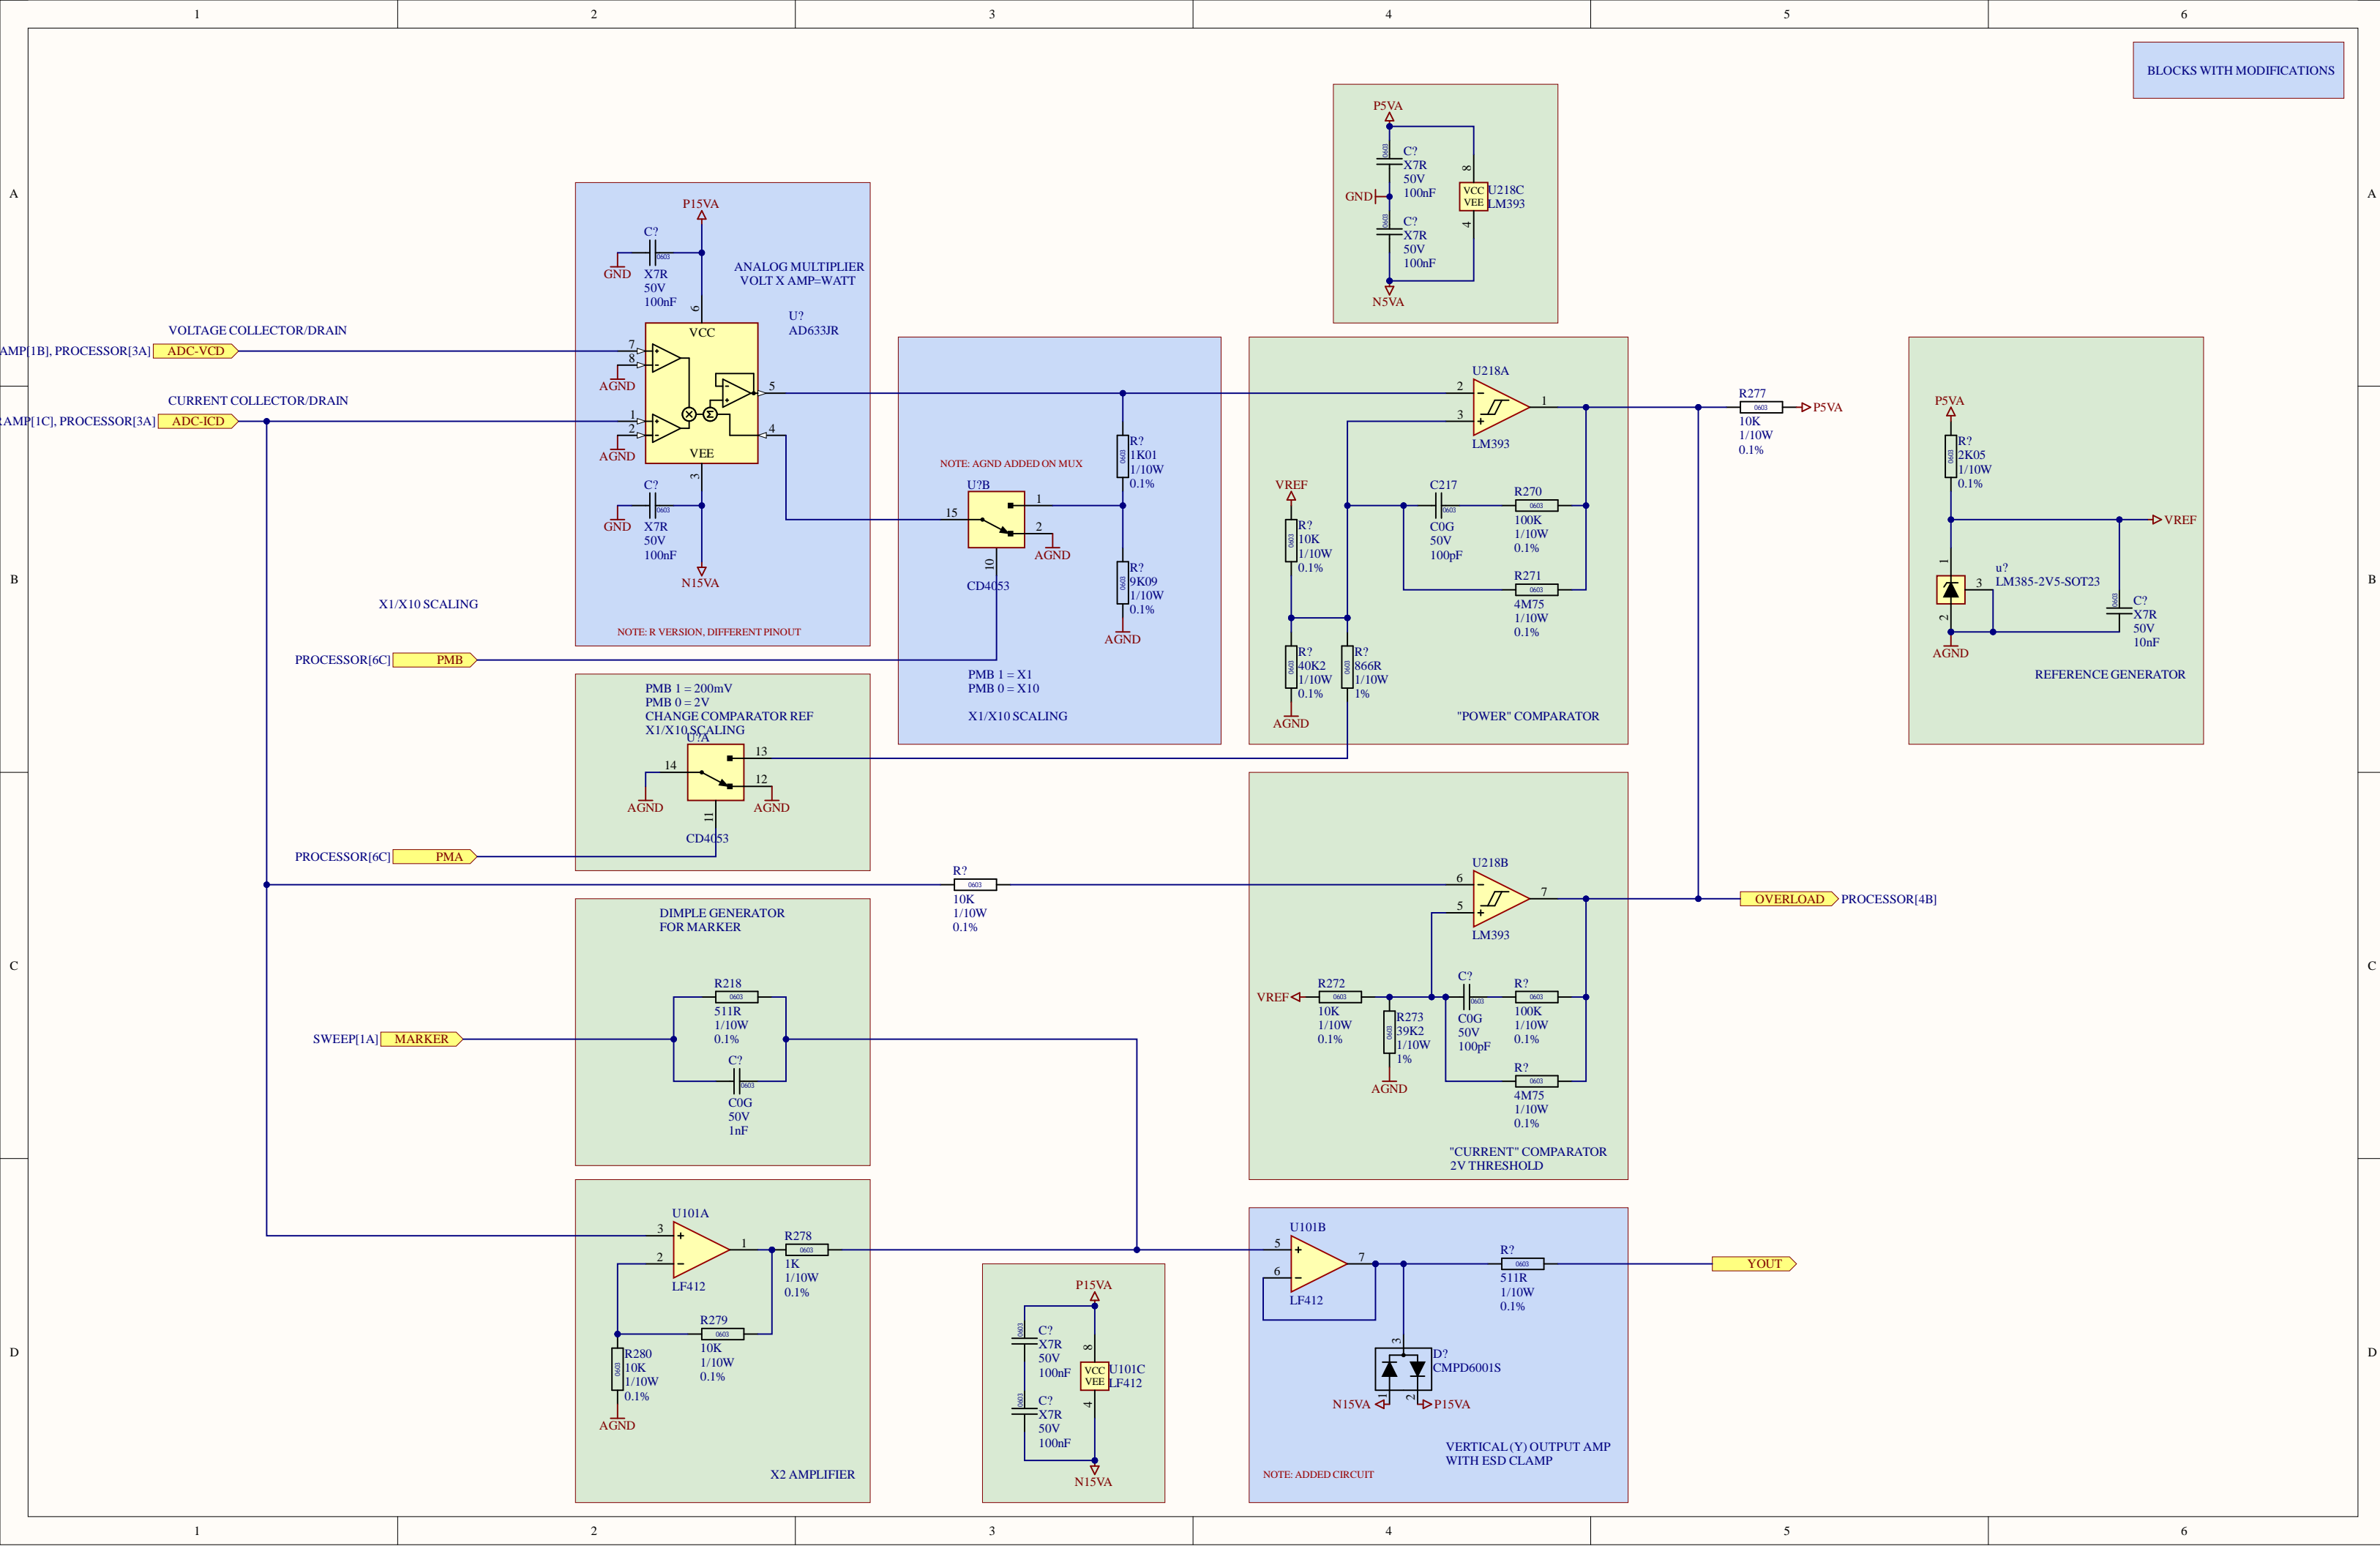

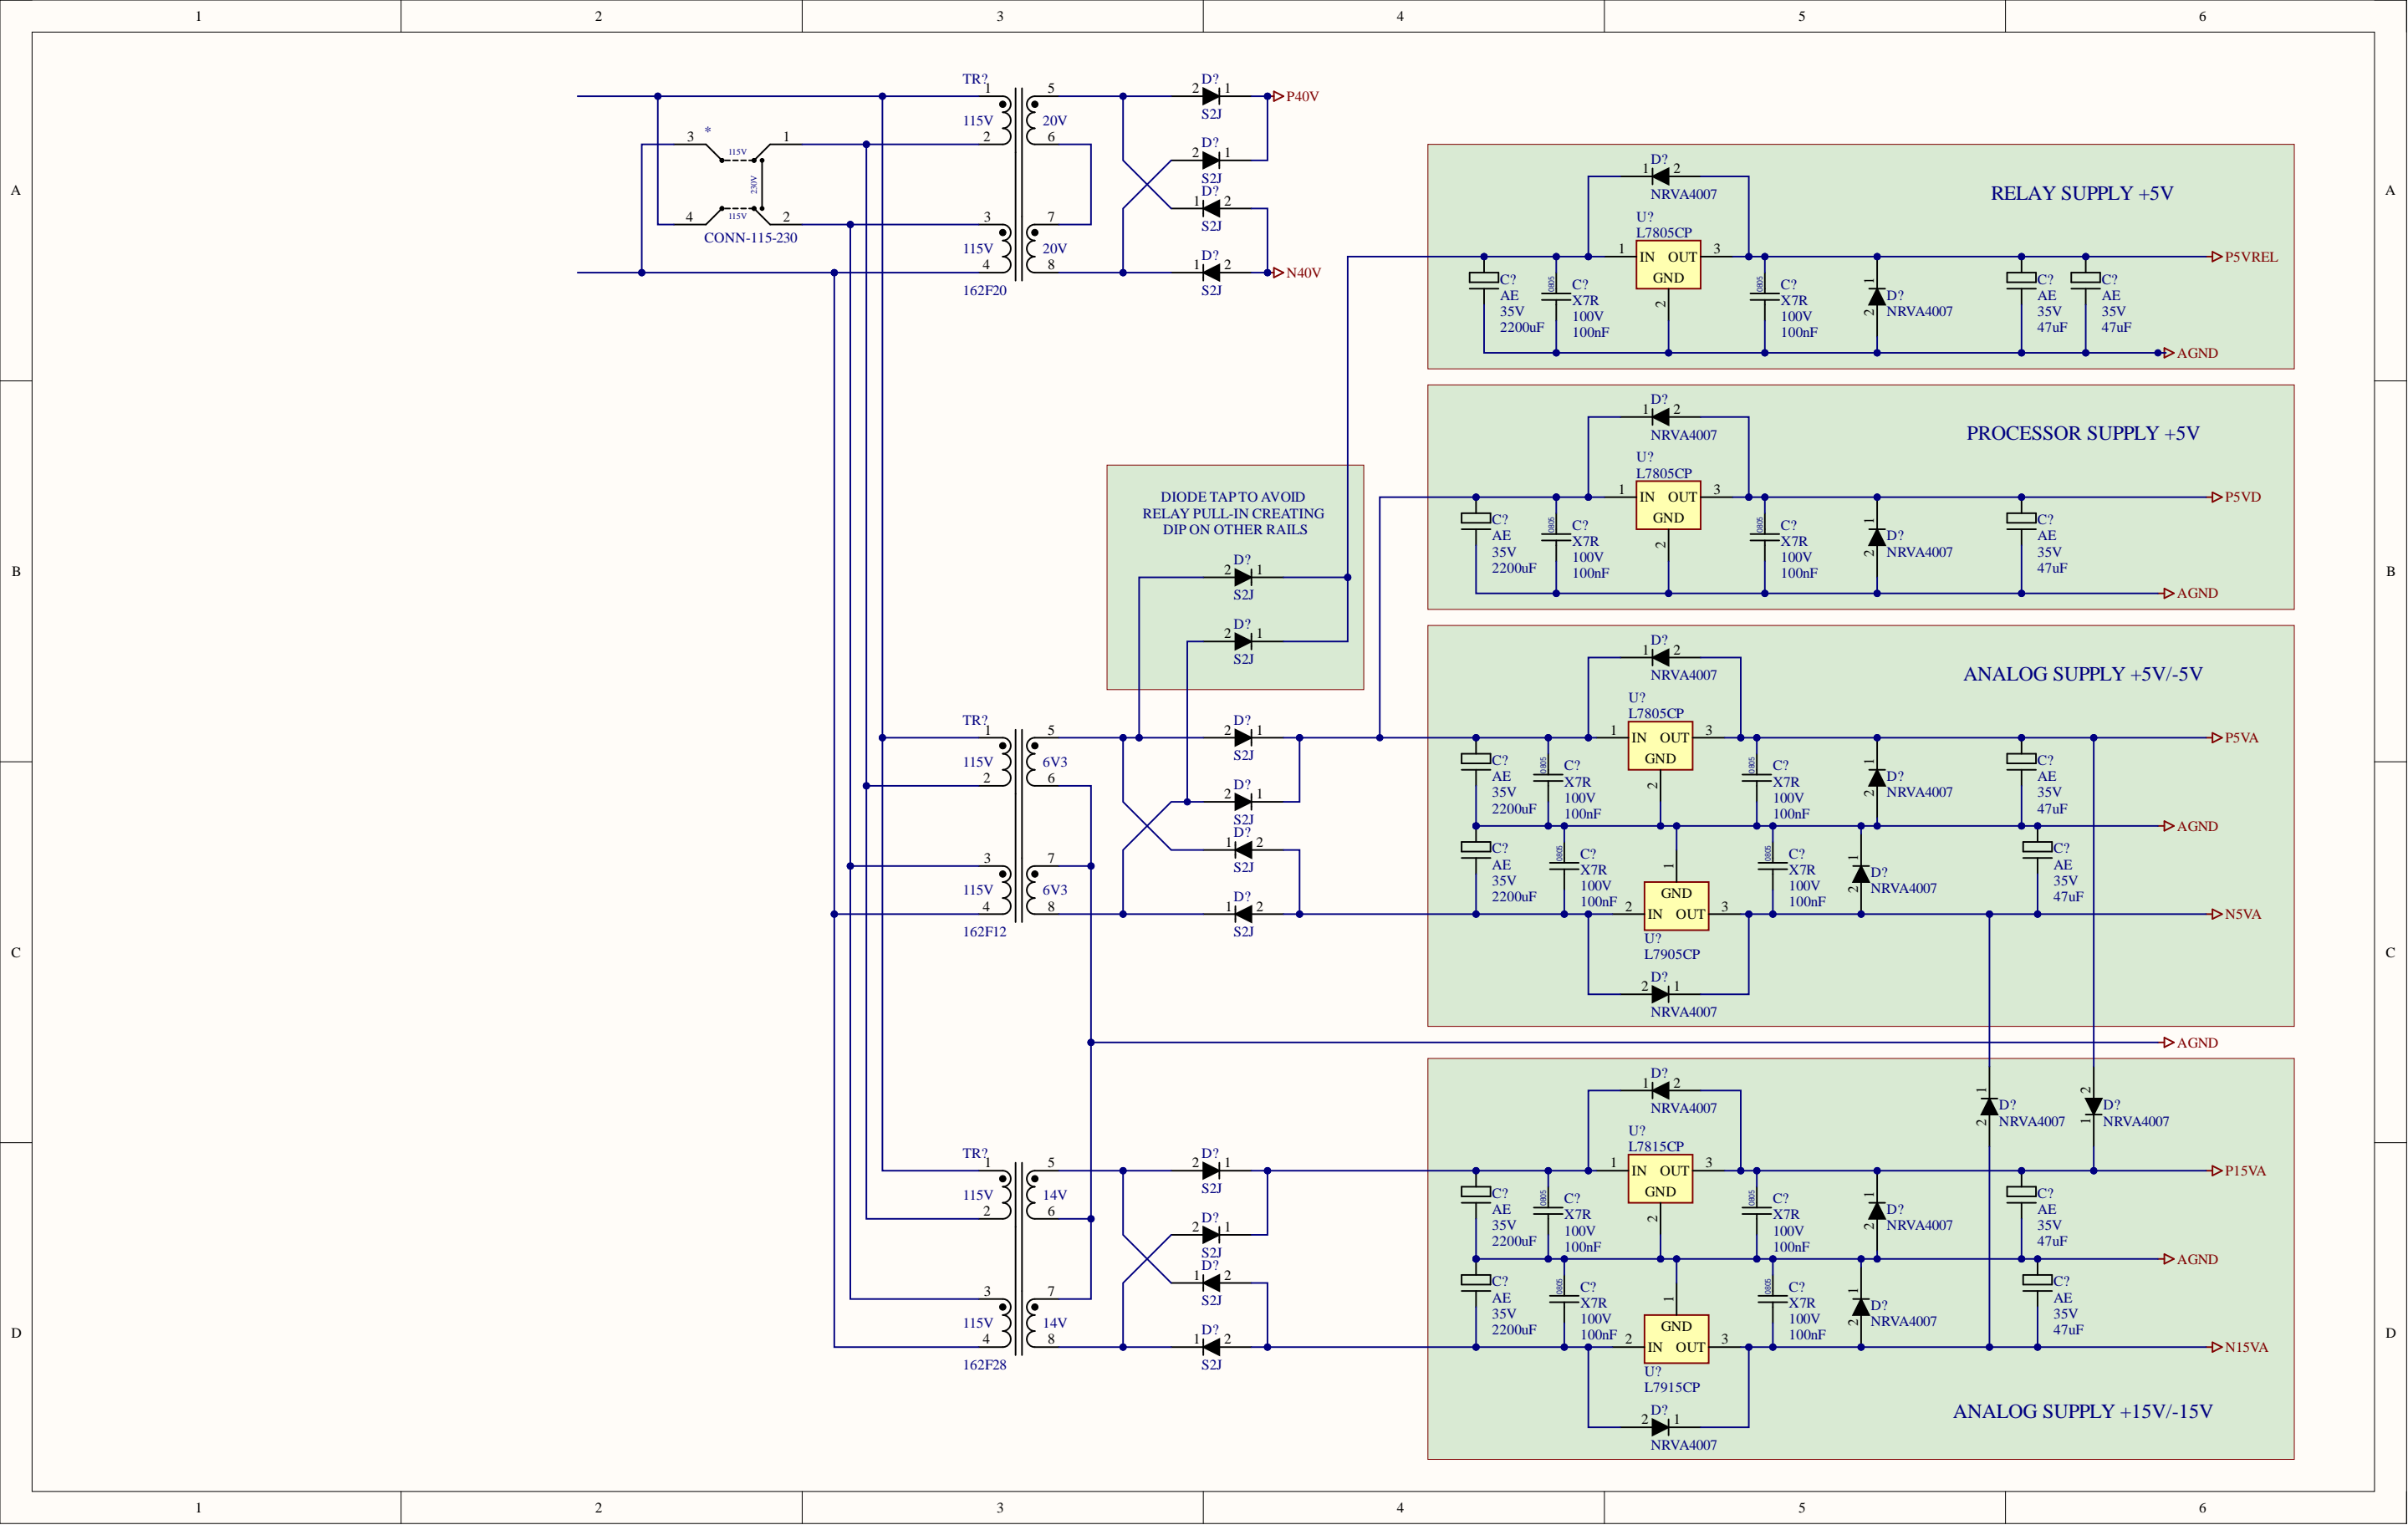

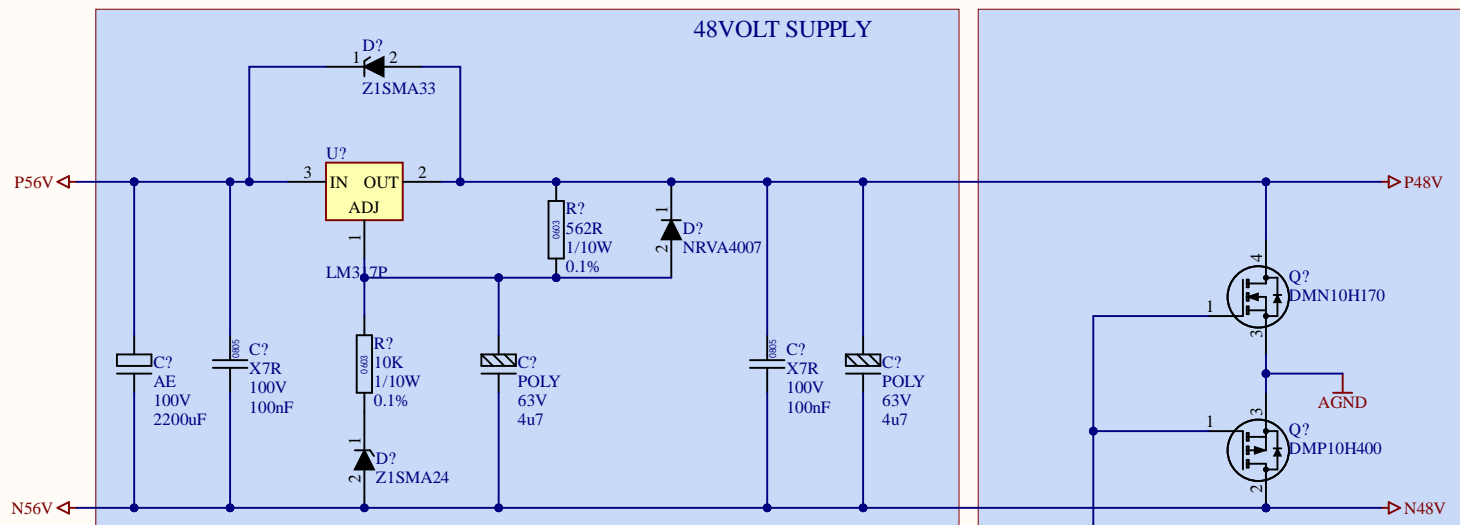

THIS MECHANISM PUSHES EITHER THE POSITIVE RAIL TO 40 VOLT OR THE NEGATIVE RAIL TO -40V. THE POWER AMP EITHER RUNS FROM +5 TO -40 VOLTS, OR FROM -5 TO +40 VOLTS

