

CB17-11 Series - Load Cell for Electronic Scale

Features

- Low capacity, Compact size.

Specifications

Rated capacity : 5.884 N {600 gf} ~ 29.42 N {3 kgf}
 Safe overload : 300 %R.C.
 Ultimate overload : 400 %R.C.
 Rated output : 1 mV/V $\pm$ 0.1 mV/V
 Non-linearity : 0.02 %R.O.
 Hysteresis : 0.02 %R.O.
 Repeatability : 0.02 %R.O.
 Creep : 0.02 %R.O. / 20 min
 Creep recovery : 0.02 %R.O. / 20 min
 Recommended excitation : 10 V or less
 Maximum excitation : 15 V
 Zero balance : $\pm$ 0.05 mV/V
 Input resistance : 420 Ω $\pm$ 5 %
 Output resistance : 350 Ω $\pm$ 5 %
 Insulation resistance : 2 000 M Ω or more (DC50 V) (between bridge and body)
 Compensated temp. range : - 10 $^{\circ}$ C ~ 50 $^{\circ}$ C
 Safe temp. range : - 10 $^{\circ}$ C ~ 50 $^{\circ}$ C
 Temp. effect on zero balance : 0.04 %R.O./10 $^{\circ}$ C
 Temp. effect on output : 0.012 %LOAD/10 $^{\circ}$ C
 Cable : ϕ 3.2, 4-cores shielded 40 cm wire directly attached.
 Cable end is separated.
 Protection grade : IP64
 Durability : Aluminium

< Accessories >


- Inspection data sheet 1 copy

< Table of parts No. >

(Unit : mm)

Parts No.	Rated Capacity	Displacement	Natural Freq. (Hz)	Weight (Approx. g)
CB17-600G-11	5.884 N {600 gf}	$\pm$ 0.17	200	40
CB17-1K-11	9.807 N {1 kgf}		290	
CB17-2K-11	19.61 N {2 kgf}		410	
CB17-3K-11	29.42 N {3 kgf}		500	

Outlines

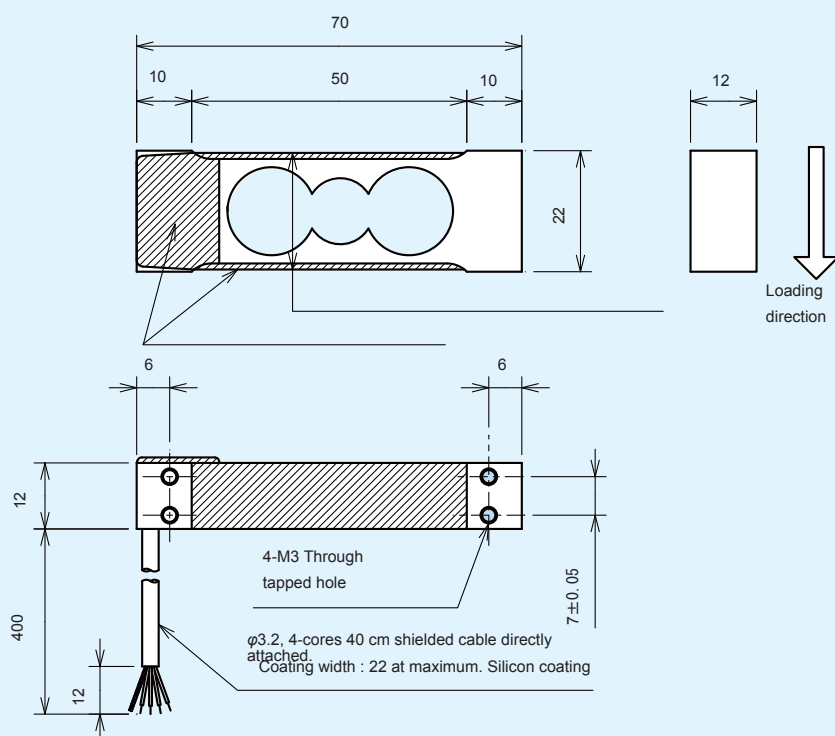

Unit : mm