


Single Point Load Cell AK-300 with a Rated Load of 120 ... 300 kg

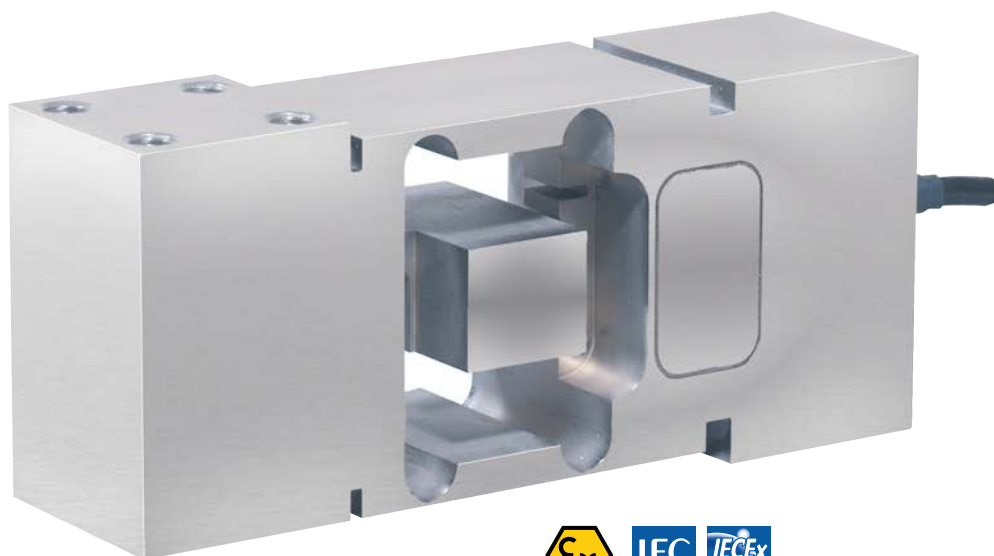


Data sheet

Performance Features


- Stainless steel single point load cell
- 3000d OIML R60 and 5000d NETP approved
- Level of protection: IP68
- Designed for platforms of maximum dimensions 600 mm x 600 mm (off-center load compensated)
- Ideally suited for single point scales and dosing scales
- ATEX 2014/34/EU version for hazardous area (option)

Application

- Food industry
- Chemical/pharmaceutical industry
- Dosing equipment in humid and corrosive environments



Dimensions in mm

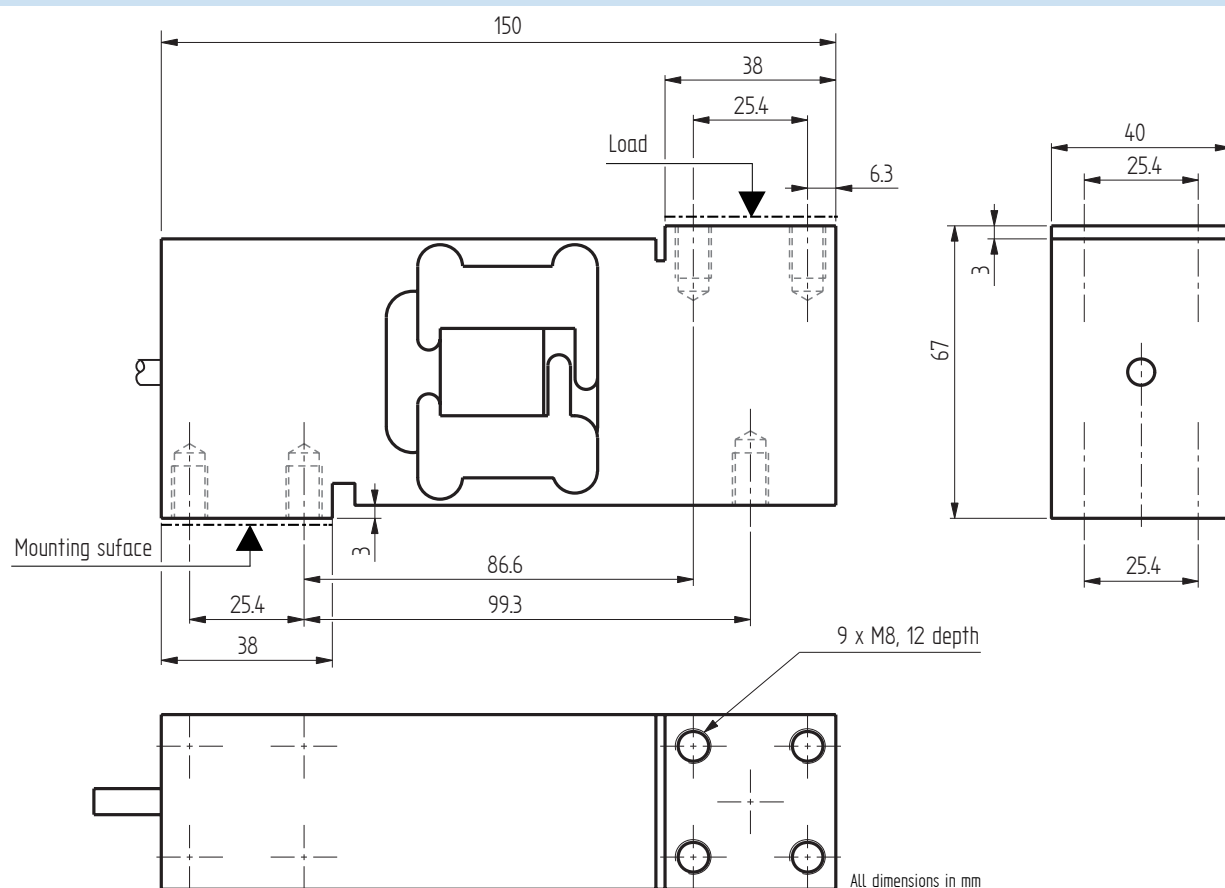

Warning

AK120 and 300 kg installation requires mounting hardware with a minimum hardness of 53 HRC and screws of class 12.9

Article-No.	Version	Rated Load [kg]
109681	C3 12e	120
109682	C3 12e	300

Connection Assignment

Electrical Connection

Function	Wire Color
Excitation (+)	Brown
Signal (+)	Yellow
Signal (-)	White
Excitation (-)	Green
Sensing (+)	Gray
Sensing (-)	Pink

Technical Data

Type	AK	
Version		C3 12e
Rated load E	kg	120; 300
Maximum load for approved weighing E_{max}	kg	120.3; 300.3
Accuracy class OIML R60		C3
Maximum numbers of load cell intervals n_{max}	d OIML	3000
Minimum verification interval v_{min}	kg	E/12000
Creep division factor $Z = E_{max}/2 \times DR$		3000
Combined error	% E	±0.017
Temperature coefficient of zero signal	% E/°C	±0.0012
Temperature coefficient of characteristic value	% E/°C	±0.0014
Load creep d_{cr, F} in 30 min.	% E	±0.025
Zero balance	% E	±10
Rated output at E C_{nom}	mV/V	2 ±10 %
Rated range of excitation voltage B_{U, nom}	V	1 ... 15
Input resistance R_e	Ω	385 ±20
Output resistance R_a	Ω	350 ±5
Insulation resistance R_{is}	MΩ/50V	5000
Electrical connection		Cable, PVC, 3 m
Rated temperature range B_{T, nom}	°C	-10 ... 40
Operating temperature range B_{T, G}	°C	-20 ... 60
Limit load E_{lim}	% E _{max}	150
Breaking load E_b	% E _{max}	200
Tightening torque	Nm	40
Maximum platform dimension	mm	600 x 600
Level of protection		IP68
Material		Stainless steel
Weight		2.2

Options

Article-No.	Description
111735	Protective coating
107798	ATEX 2014/34/EU, IECEx: ex II 1 G/D, Ex ia IIC T6 Ga, Ex ia IIIC T80 °C Da, IP6X, -20 °C < Ta < +60 °C (zones gaz 0/1/2, dust 20/21/22)
115049	ATEX 2014/34/EU, IECEx: ex II 1 D, Ex ta IIIC T125 °C Da, IP6X, -20 °C < Ta < +60 °C (zones dust 20/21/22)
115048	ATEX 2014/34/EU, IECEx: ex II 3 G, Ex nA IIC T6 Gc, -20 °C < Ta < +60 °C (zone gaz 2)


Accessories

Electrical Connection

Article-No.	Description
10323	Male cable connector KS6 (6-pin, Series 581) incl. mounting
10320	Male cable connector KSSH15 (15-pin) incl. mounting
43418	Input connector ZA9612FS (ALMEMO) incl. sensor mounting and connector calibration
49205	Input connector ZKD712FS (ALMEMO 202) incl. sensor mounting and connector calibration

Accessories (continued)

Weighing Electronics

ALCJB-A	CPJ/CPJ2S	IPE50 Panel
		

Further suitable accessories you can find on our homepage under:

https://www.lorenz-messtechnik.de/english/products/lc_weighing-electronics.php