



F205 Donut Loadcell

Geometry: Axial strain cylinder in a sealed case, with raised end load bearing faces and hole right through. For use in compression or in fail-safe tensile applications.

The F205 is ideally suited to engineering force measurements including through centre safety testing of cables, rods and bolts.


It is designed for easy installation, usually between two flat faces bearing on its loading rings, either unattached or with retaining spigots positioned in the centre hole. Alternatively tensile load transfer can be achieved via a tie rod assembly through the centre hole. In this way the loadcell can indirectly measure tensile loads in a "fail-safe" mode.

We are happy to design variants of this loadcell to meet your specific requirements. Versions can be manufactured for operation up to +250°C. Please consult our engineering department.


Features

- ✓ Hardened stainless steel body
- ✓ Very high structural load limit
- ✓ Standard 1 year warranty
- ✓ Tensile applications are 'fail-safe'
- ✓ Flying lead or connector option
- ✓ Traceable calibration with certificate included in the standard price

Outline

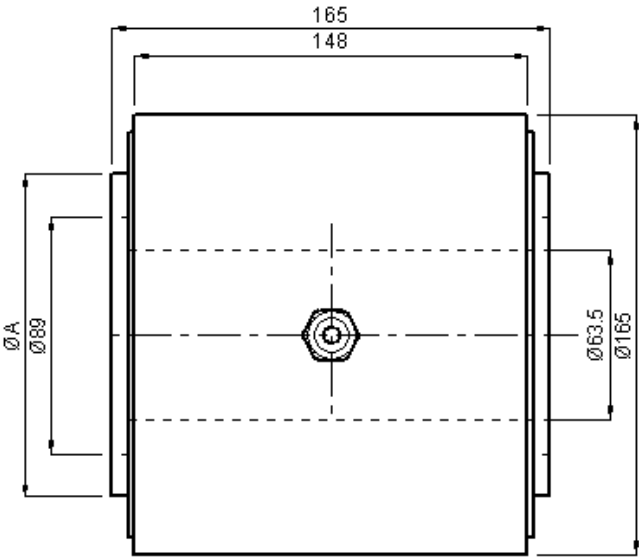

RANGE	ØA
1000kN	120.7
2000kN	137.0

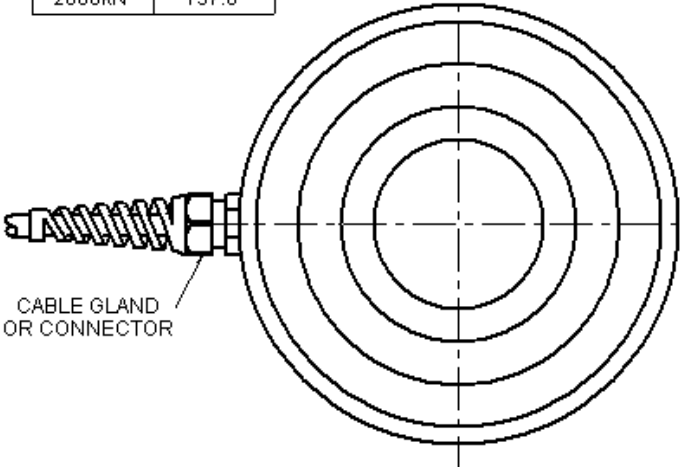

Specifications

Parameter	Value	Unit
Non-linearity - Terminal	±0.5	% RL
Hysteresis	±0.5	% RL
Creep - 20 minutes	±0.05	% AL
Repeatability	±0.02	% RL
Rated output - Nominal	1.2	mV/V
Rated output - Rationalised	1.0	mV/V
Rationalisation tolerance	±0.5	% RL
Zero load output	±4	% RL
Temperature effect on rated output per °C	±0.005	% AL
Temperature effect on zero load output per °C	±0.03	% RL
Temperature range - Compensated	-10 to +50	°C
Temperature range - Safe	-10 to +80	°C
Excitation voltage - Recommended	10	V
Excitation voltage - Maximum	20	V
Bridge resistance	700	Ω
Insulation resistance - Minimum at 50Vdc	500	MΩ
Overload - Safe	50	% RL
Overload - Ultimate	400	% RL
Sealing	IP65	
Weight - Nominal (excluding cable)	18 to 19	kg

Order Codes

Code	Description
F205CFR0K0	Compression, IP65, unrationalised
F205CFR0KN	Compression, IP65, rationalised

Structural Stiffness

Range (kN)	Stiffness (N/m)
1000	1.5×10^{10}
2000	3.0×10^{10}

Notes

- AL = Applied load.
- RL = Rated load.
- Temperature coefficients apply over the compensated range.
- The load must be applied directly through the central loading axis.

Connections

The loadcell is fitted with 2 metres of PVC insulated 4 core screened cable type 16-2-4C or a 4 pin Binder 723 series chassis plug.

Excitation + = Red or pin 1, Excitation - = Blue or pin 2, Signal + = Yellow or pin 3, Signal - = Green or pin 4, Screen = Orange.

The screen is not connected to the loadcell body.